

Chillers

The ultimate in
reliability and flexibility



A large industrial building with a white facade and vertical panels. A grey Daikin chiller unit is mounted on a metal platform on the roof. The platform has a railing and is supported by several vertical posts. The chiller unit has the 'DAIKIN' logo on its side. A blue text box is overlaid on the right side of the image.

Daikin chillers offer the ultimate in reliability and flexibility — a reflection of the advanced technology inherent within them. Daikin chillers represent the sure and safe route to a comfortable environment and a process cooling solution that is clean and consistent.

Chillers

Why choose Daikin chillers	610		
Products Overview - Air cooled chillers, condensing units and Multipurpose units	614		
Products Overview - Water cooled and condenserless chillers	616		
Air cooled chillers cooling only	619		
NEW EWAA-DV3P	619		
EWAA-DW1P	620		
EWAA-DV3P-H	621		
EWAA-DW1P-H	622		
EWAT-CZ	623		
EWYT-CZ	626		
EWAD-CF	629		
EWAD-TZS	634		
EWAD-TZX	636		
EWAD-TZP	638		
EWAH-TZS	640		
EWAH-TZX	642		
EWAH-TZP	644		
EWAD-TZSSC2/SLC2	646		
EWAD-TZSRC2	647		
EWAD-TZXSC2	648		
EWAD-TZXRC2	649		
EWAH-TZSSC2/SLC2	650		
EWAH-TZSRC2	651		
EWAH-TZXSC2/XLC2	652		
EWAH-TZXRC2	653		
EWAD-T-SSC/SLC	654		
EWAD-T-XSC/XLC	655		
EWAD-T-XRC	656		
EWAT-B-SSB/SLB	660		
EWAT-B-SRB	661		
EWAT-B-XSB/XLB	662		
EWAT-B-XRB	663		
		Air cooled chillers Heat pump	664
		NEW EWYA-DV3P	664
		EWYA-DW1P	666
		EWYA-DW1P-H	667
		EWYA-DV3P-H	668
		EWYT-B-SS/SL	672
		EWYT-B-SR	673
		EWYT-B-XS/XL	674
		EWYT-B-XR	675
		NEW EWYT-CZ I / EWYT-CZ O	676
		EWYD-BZSS	678
		EWYD-BZSL	679
		Multipurpose unit	680
		EWYD-4ZXS2	681
		EWYD-4ZXR2	682
		Air cooled condensing unit	684
		ERAD-E-SS	684
		ERAD-E-SL	685
		Water cooled chillers	686
		NEW EWWQ-KC	686
		EWHQ-G-SS	688
		EWWQ-G-SS	689
		EWWQ-L-SS	690
		EWWD-J-SS	691
		EWWH-J-SS	692
		EWWS-J-SS	693
		EWWD-VZ	696
		EWWH-VZ	700
		EWWS-VZ	704
		NEW EWLQ-KC	707
		Condenserless chillers	709
		EWLQ-G-SS	709
		EWLQ-L-SS	710
		EWLD-J-SS	711
		EWLH-J-SS	712
		EWLS-J-SS	713
		EWLD-I-SS	714
		Water cooled centrifugal chillers	716
		EWWD-DZ	716
		EWWH-DZ	718
		EWWS-DZ	720
		NEW DWSC C Series	722
		NEW DWDC C Series	723
		Accessories	724



Daikin chillers

Why choose Daikin chillers?

Daikin chillers are the perfect bridge between project requirements and customer satisfaction.

From the smallest chillers to the very largest, our quality control and attention detail is absolute.

Our systems have the **most advanced technologies**, deliver **the highest energy efficiencies** and **lowest running costs**, and are the gold standard for reliability and performance.

The widest and most flexible chiller portfolio

- › From the smallest mini chiller for residential use to the largest chiller for district cooling
- › Tailor made solutions based on the most advanced technologies
- › Wide range of options and accessories

Worldwide experience in chiller design and manufacturing

- › World's most advanced facilities for air conditioning research and development: the Applied Development Center in Minneapolis, Minnesota
- › Inhouse development and manufacturing of chiller main components (compressors, fans, condenser coils, software, etc...)
- › Chillers produced in European factories, in Milan and Ostend

The highest efficiency for every installation

- › Inverter technology over the whole capacity range
- › The lowest total cost of ownership and fast payback time

Quality and reliability

- › Daikin's integrated zero defect policy ensures quality of components and finished products
- › Each Daikin chiller is factory run-tested and subjected to quality audit before shipment

Benefits for installers

- › Plug & play solutions
- › Maximum serviceability
- › Ideal solutions for retrofit projects

Benefits for consultants

- › Energy efficient solutions without compromising on reliability and performance
- › Latest technology embedded in all our products

Benefits for end users

- › Remarkable savings on running costs
- › Easy to customise the chiller to your application, environment and need thanks to more than 150 different options.

Web-based chiller selection software

A user-friendly interface allows users to quickly create new projects, open and change existing projects or simply do a quick selection.

Technical selection reports can be printed or downloaded in several formats.

To make life easier, the tool is accessible everywhere, via any device. No matter where you are, projects can be consulted.

Create now a new account on:

<http://tools.daikinapplied.eu/>



	EWYD-4Z-05	EWYD-4Z-07	EWYD-4Z-09	EWYD-4Z-11	EWYD-4Z-13	EWYD-4Z-15
Capacity - Cooling [kW]	448.8	518.5	594.9	669.9	812.8	754.1
Condenser Power - Cooling [kW]	511.2	576.6	673.3	711	864	813
SEER	5.53	5.58	5.77	5.53	5.64	5.31
EER35	7.31	7.32	8.15	7.23	8.1	7.3
PLR	14.42	14.76	14.1	14.05	14.52	14.37
Weight	2390	2320	2098	2120	2120	2120
Width [mm]	1180	1180	1180	1180	1180	1180
Height [mm]	1460	1460	1460	1460	1460	1460
Weight 1000 kg	2368	2311	2047	2012	2102	2108
Condenser Flow rate - Cooling [l/s]	23.6	24	24.2	26.1	26.6	23.8
Condenser Flow rate - Cooling [m³/h]	85	86	86	89	96	86
Condenser Flow rate - Heating [l/s]	23.5	23.4	23.5	24.6	24.7	23.2
Condenser Flow rate - Heating [m³/h]	85	85	85	89	89	84

Supporting tools

Business portal

- › Experience our extranet that thinks with you at my.daikin.eu
- › Find information in seconds via a powerful search
- › Customise the options so you see only info relevant for you
- › Access via mobile device or desktop

Website

- › www.daikin.eu/en_us/product-group/chillers.html
- › Explore our product range
- › Find our solutions for applications
- › Get more commercial details on our flagship products

Literature

- › Download or consult our literature for our professional network and end-customers



401 Chiller and air side equipment
Product portfolio



416 Modular L
Product profile





445 EWYD-4Z Multipurpose
Product profile



404 EWAD-TZ B
Product profile




418 Chiller series
Product profile

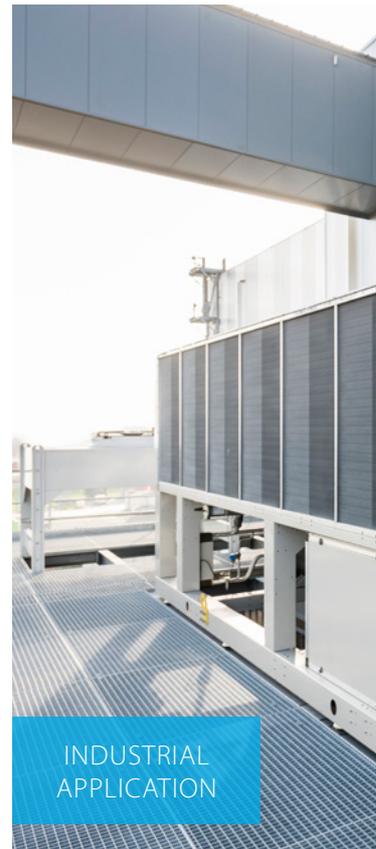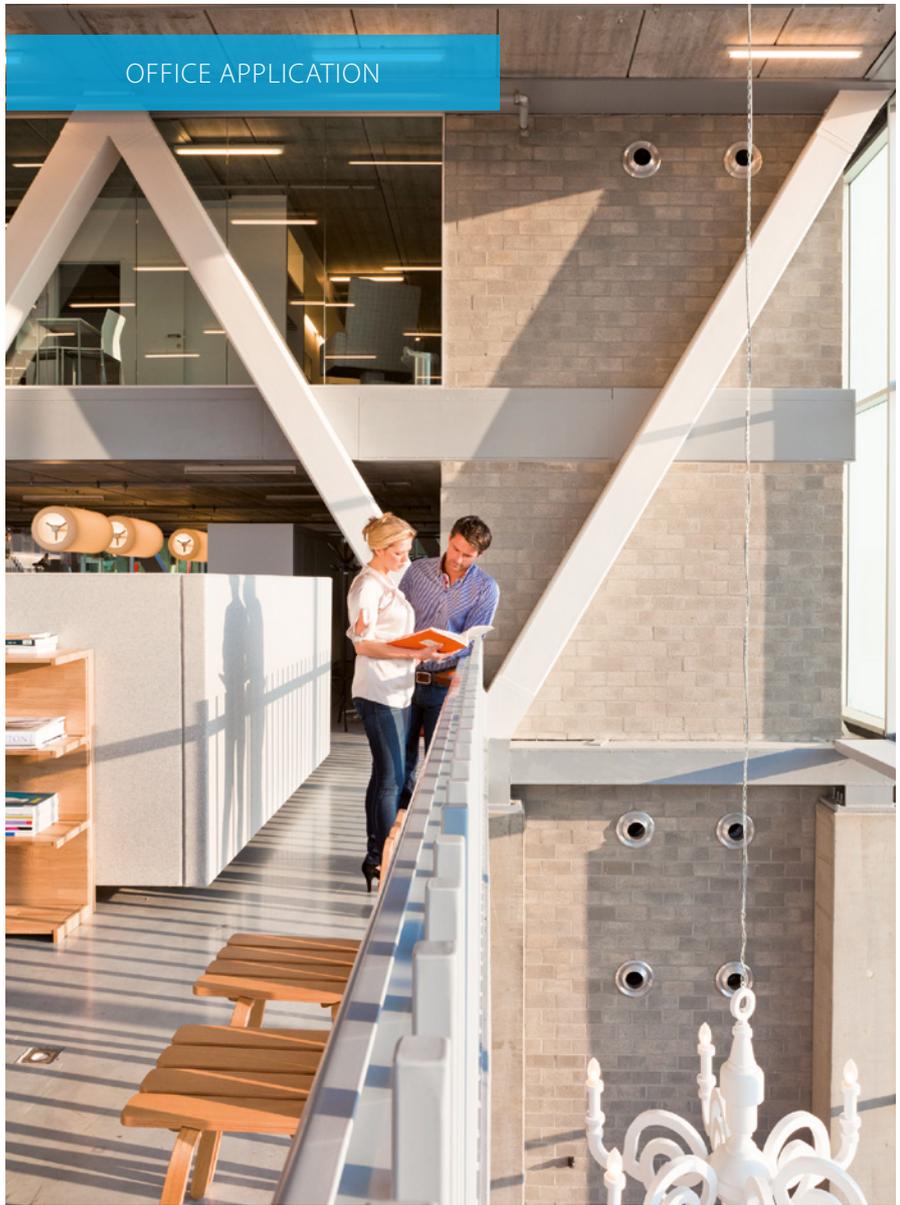

HOTEL
APPLICATION



DATA CENTER
APPLICATION

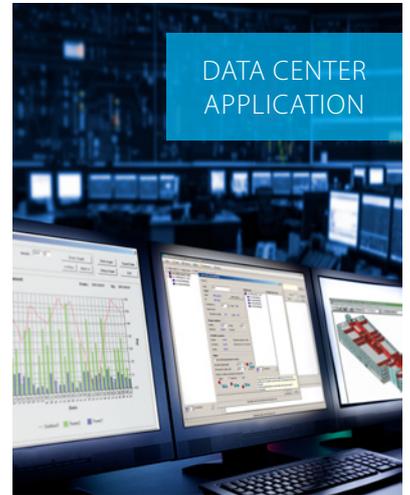

PROCESS COOLING
APPLICATION




Products overview

	Refrigerant type *	Refrigerant circuits	Inverter 	Free cooling 	Compressor			Water heat exchanger		Efficiency version			Sound version		
					Swing 	Scroll 	Screw 	Plate ** 	Single pass shell and tube 	Standard 	High 	Premium 	Standard 	Low 	Reduced 
Cooling only															
EWAA-DV3P		R-32	1	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>				<input checked="" type="checkbox"/>	BPHE	<input checked="" type="checkbox"/>			<input checked="" type="checkbox"/>	
EWAA-DV3P-H/ DW1P-H		R-32	1	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>				<input checked="" type="checkbox"/>	BPHE	<input checked="" type="checkbox"/>			<input checked="" type="checkbox"/>	
EWAT~CZN/P/H		R-32	1-2	<input checked="" type="checkbox"/>			<input checked="" type="checkbox"/>		<input checked="" type="checkbox"/>	BPHE	<input checked="" type="checkbox"/>			<input checked="" type="checkbox"/>	
EWAD~CF		R-134a	2		<input checked="" type="checkbox"/>			<input checked="" type="checkbox"/>			<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>		<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>
EWAD-TZ B		R-134a	1-2	<input checked="" type="checkbox"/>				<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>		<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>
EWAH-TZ B		R-1234ze(E)	1-2	<input checked="" type="checkbox"/>				<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>		<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>
EWAD-TZ C		R-134a	1-2	<input checked="" type="checkbox"/>				<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>		<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>
EWAH-TZ C		R-1234ze(E)	1-2	<input checked="" type="checkbox"/>				<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>		<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>
EWAD-T-		R-134a	2					<input checked="" type="checkbox"/>		<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>
EWAT-B		R-32	1-2				<input checked="" type="checkbox"/>		<input checked="" type="checkbox"/>		<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>		<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>
Heat pump															
EWYA-DV3P		R-32	1	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>				<input checked="" type="checkbox"/>	BPHE	<input checked="" type="checkbox"/>			<input checked="" type="checkbox"/>	
EWYA-DV3P-H/ DW1P-H		R-32	1	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>				<input checked="" type="checkbox"/>	BPHE	<input checked="" type="checkbox"/>			<input checked="" type="checkbox"/>	
EWYT~CZN/P/H	 NEW	R-32	1-2	<input checked="" type="checkbox"/>			<input checked="" type="checkbox"/>		<input checked="" type="checkbox"/>	BPHE	<input checked="" type="checkbox"/>			<input checked="" type="checkbox"/>	
EWYT-B		R-32	1-2				<input checked="" type="checkbox"/>		<input checked="" type="checkbox"/>	BPHE	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>		<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>
EWYT-CZI EWYT-CZO		R-32	1-2	<input checked="" type="checkbox"/>			<input checked="" type="checkbox"/>		<input checked="" type="checkbox"/>	BPHE	<input checked="" type="checkbox"/>			<input checked="" type="checkbox"/>	
EWYD~BZ		R-134a	2-3	<input checked="" type="checkbox"/>				<input checked="" type="checkbox"/>		<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>			<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>
Condensing unit															
ERAD~E-		R-134a	1					<input checked="" type="checkbox"/>			<input checked="" type="checkbox"/>			<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>
Multipurpose unit															
EWYD-4Z		R-134a	2	<input checked="" type="checkbox"/>				<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>		<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>		<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>

* (GWP): R-410A (2,087.5), R-134a (1,430) - ** BPHE: Brazed plate heat exchanger

Air cooled chillers, condensing units and Multipurpose units

Cooling capacity (kW)
Heating capacity (kW)

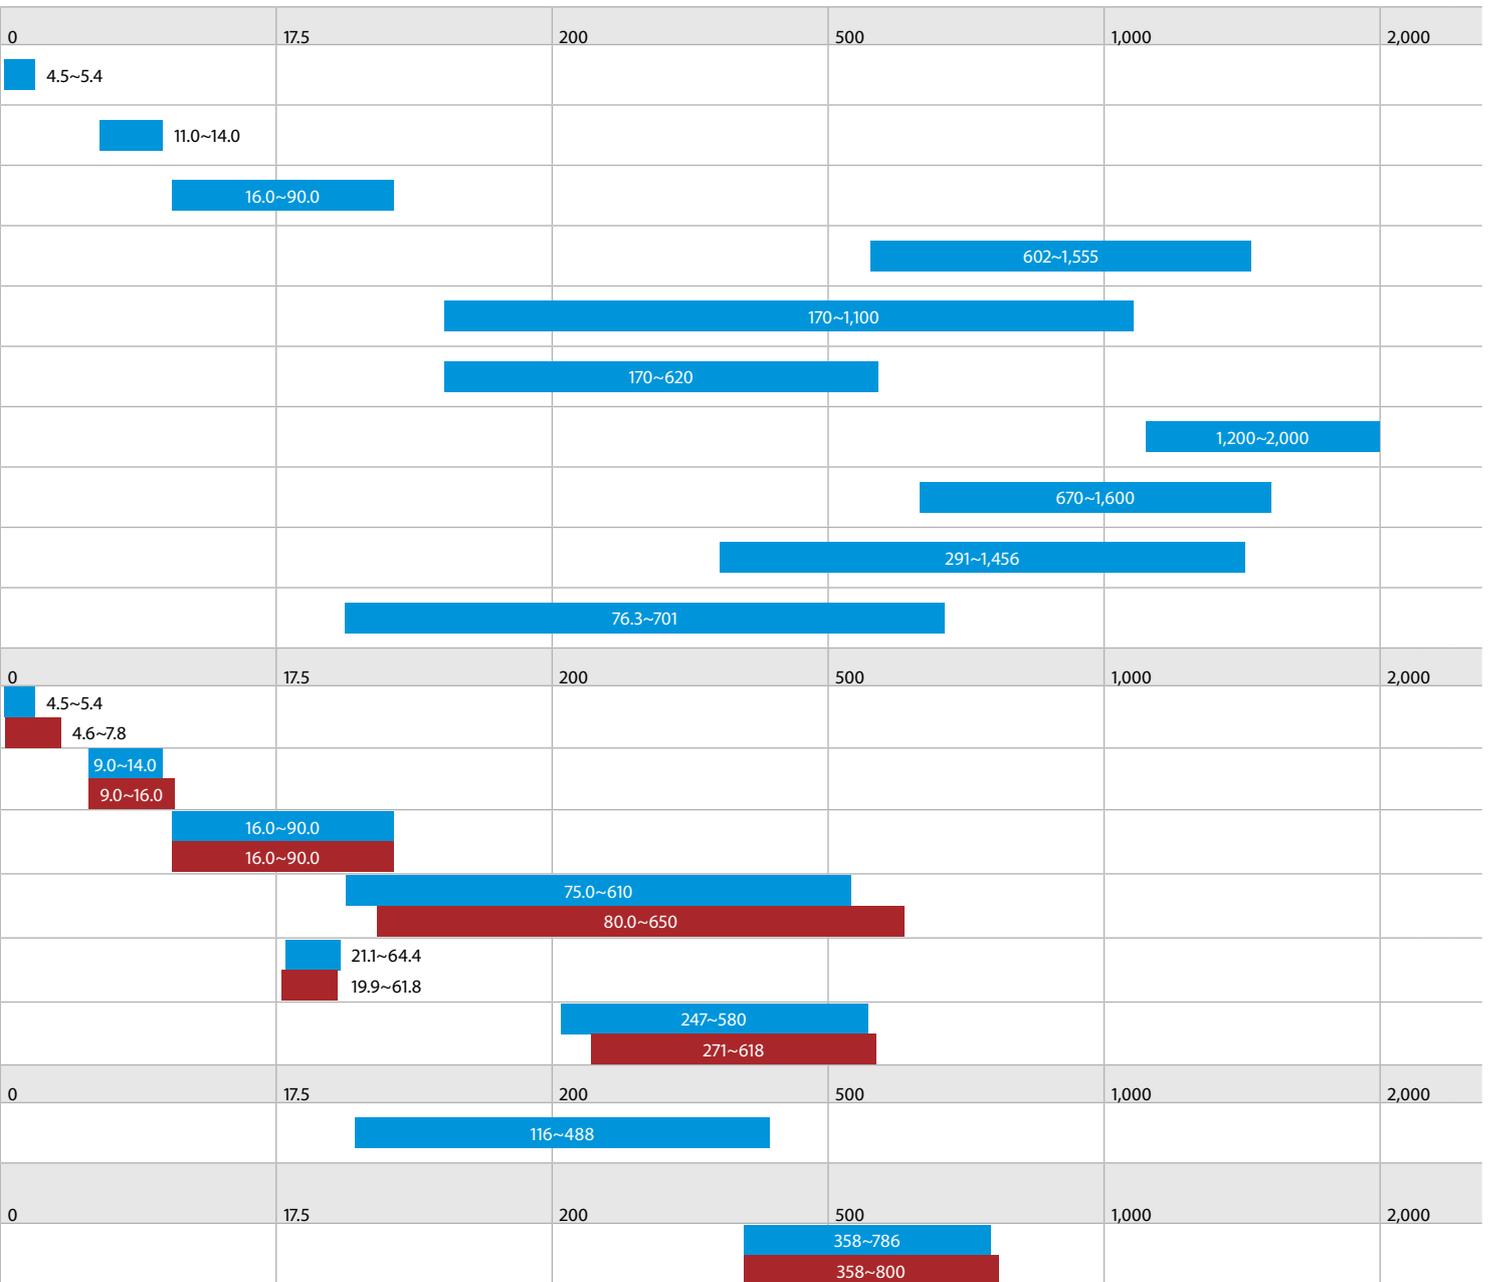


Products overview

	Refrigerant Type *	Refrigerant circuits	Inverter 	Compressor			Water heat exchanger			Efficiency version			Sound version
				Scroll 	Screw 	Centrifugal 	Plate ** 	Single pass shell and tube 	Shell and tube 	Standard	High	Premium	Standard
Water cooled chillers (Cooling only and Heat Pump)													
	R-410a	1-2		●			●			●			●
	R-410A	1		●			●			●			●
	R-410A	1		●			●			●			●
	R-410A	2		●			●			●			●
	R-134a	1			●		●			●			●
	R1234ze	1			●		●			●			●
	R-513A	1			●		●			●			●
	R-134a	1-2	●		●				● Flooded	●	●	●	●
	R-1234ze(E)	1-2	●		●				● Flooded	●	●	●	●
	R-513A	1-2	●		●				● Flooded	●	●	●	●
Condenserless chillers													
	R-410A	1-2		●			● BPHE			●			●
	R-410A	1		●			●			●			●
	R-410A	2		●			●			●			●
	R-134a	1			●		●			●			●
	R-134a	1-2-3			●		●	●		●			●
	R1234ze	1			●		●			●			●
	R-513A	1			●		●			●			●
Water cooled centrifugal chillers													
	R-134a	1				●			●		●		●
	R-1234ze(E)	1				●			●		●		●
	R-134a and R513A	1	optional			●			● Flooded		●		●
	R-134a, R-513A and R-1234ze	1	optional			●			● Flooded		●		●
	R-134a	2 per chiller				●		● Flooded			●		●

* (GWP): R-410A (2,087.5), R-134a (1,430), R-407C (1,773.9) - ** BPHE: Brazed plate heat exchanger

Cooling capacity (kW)
Heating capacity (kW)

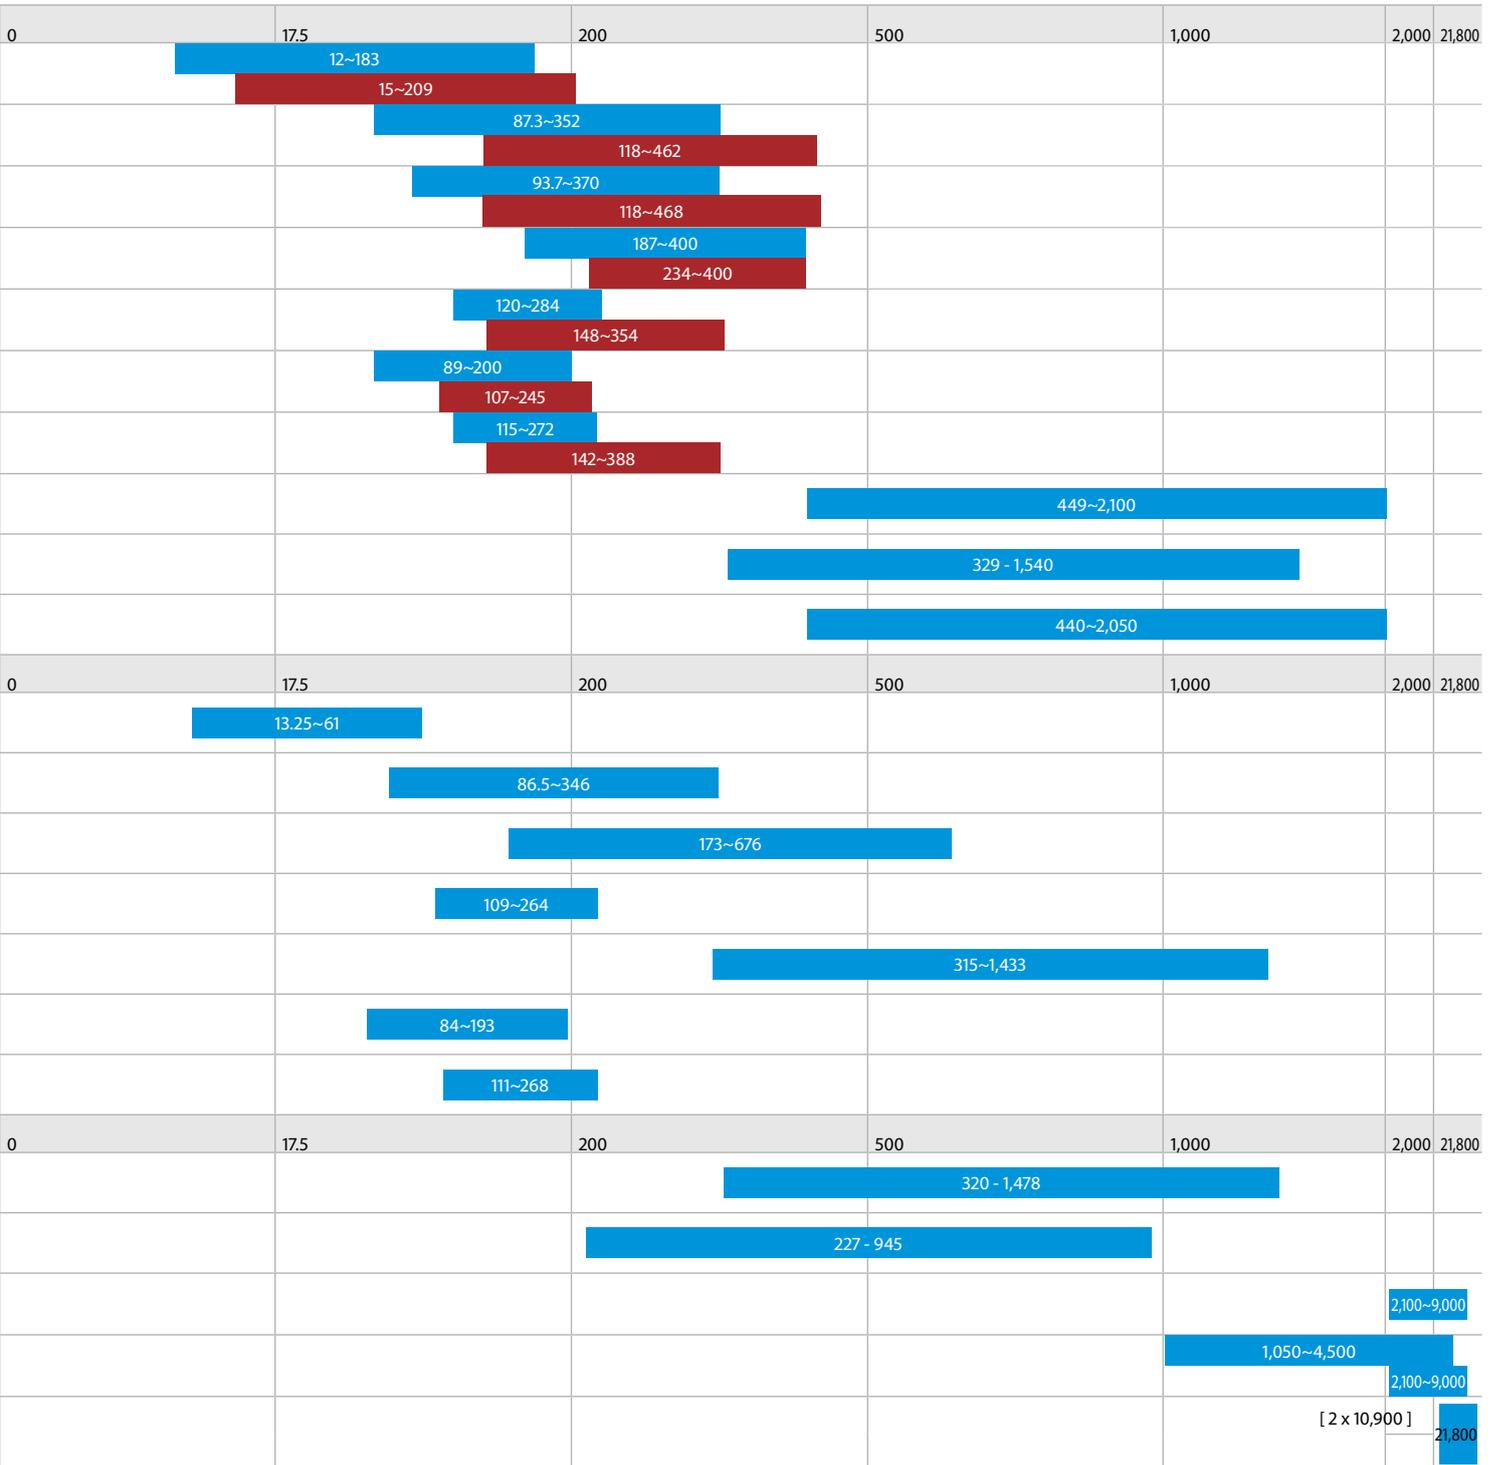



Air cooled mini inverter chiller

- > Choosing for an R-32 product, reduces the environmental impact with 68% compared to R-410A and leads directly to lower energy consumption thanks to its high energy efficiency
- > Inverter chiller
- > Hermetically sealed swing inverter compressor
- > New casing for the outdoor units
- > Separate MMI-2 controller for indoor installation



More details and final information can be found by scanning or clicking the QR codes.



EWAA-DV3P

Cooling Only				EWAA-DV3P	004	006	008
Cooling capacity	Nom.			kW	4.86 (1) / 4.52 (2)	5.83 (1) / 5.09 (2)	6.18 (1) / 5.44 (2)
Power input	Cooling	Nom.		kW	0.820 (1) / 1.36 (2)	1.08 (1) / 1.55 (2)	1.19 (1) / 1.73 (2)
Capacity control	Method				Variable (inverter)		
EER					5.91 (1) / 3.32 (2)	5.40 (1) / 3.28 (2)	5.19 (1) / 3.14 (2)
Dimensions	Unit	Height		mm	770		
		Width		mm	1,250		
		Depth		mm	362		
Weight	Unit			kg	88.0		
Water heat exchanger	Type				Plate heat exchanger		
	Water volume			l	1		
Compressor	Type				Hermetically sealed swing compressor		
	Quantity				1		
Fan	Type				Propeller fan		
	Quantity				1		
Sound power level	Cooling	Nom.		dBA	61.0 (1)	62.0 (1)	
Sound pressure level	Cooling	Nom.		dBA	48.0 (1)	49.0 (1)	50.0 (1)
Operation range	Air side	Cooling	Min.~Max.	°CDB	10 (3)~43		
	Water side	Cooling	Min.~Max.	°CDB	5 (3)~22		
Refrigerant	Type/GWP				R-32/675.0		
	Charge			kg	1.35		
Power supply	Phase/Frequency/Voltage			Hz/V	1~/50 /230 +/-10%		

(1)Condition 1: cooling Ta 35°C - LWE 18°C (DT = 5°C); heating Ta DB/WB 7°C/6°C - LWC 35°C (DT = 5°C) | (2)Condition 2: cooling Ta 35°C - LWE 7°C (DT = 5°C); heating Ta DB/WB 7°C/6°C - LWC 45°C (DT = 5°C) | (3)For more details, see operation range drawing

Air cooled mini inverter chiller

- > Choosing for an R-32 product, reduces the environmental impact with 68% compared to R-410A and leads directly to lower energy consumption thanks to its high energy efficiency
- > Inverter chiller
- > Daikin swing compressor
- > New casing for the outdoor units
- > Separate MMI-2 controller for indoor installation



More details and final information can be found by scanning or clicking the QR codes.



EWAA-DW1P

Cooling Only		EWAA		011DW1P		014DW1P		016DW1P		
Space cooling	A Condition 35°C Pdc	kW		11.6		12.8		14.0		
	ηs,c	%		229		226		221		
SEER				5.79		5.71		5.59		
Cooling capacity	Nom.	kW		11.6 (1) / 11.5 (2)		12.8 (1) / 12.7 (2)		14.0 (1) / 15.3 (2)		
Power input	Cooling Nom.	kW		3.56 (1) / 2.17 (2)		4.06 (1) / 2.51 (2)		4.58 (1) / 3.24 (2)		
Capacity control	Method					Variable (inverter)				
EER				3.26 (1) / 5.31 (2)		3.16 (1) / 5.04 (2)		3.06 (1) / 4.74 (2)		
Dimensions	Unit	Height	mm		870					
		Width	mm		1,380					
		Depth	mm		460					
Weight	Unit	kg		147						
Water heat exchanger	Type			Plate heat exchanger						
	Water volume	l		2						
Air heat exchanger	Type			High efficiency fin and tube type with integral subcooler						
Compressor	Type			Hermetically sealed swing inverter compressor						
	Quantity			1						
Fan	Type			Propeller fan						
	Quantity			1						
Sound power level	Air flow rate Cooling	Nom.	m ³ /min		70		85			
	Cooling Nom.	dBA		67.0		69.0				
Sound pressure level	Cooling Nom.	dBA		47.7		50.8		51.0		
Operation range	Air side Cooling	Min.~Max.	°CDB		10~43					
	Water side Cooling	Min.~Max.	°CDB		5~22					
Refrigerant	Type/GWP			R-32/675.0						
	Control			Electronic expansion valve						
	Circuits Quantity			1						
Refrigerant charge	Per circuit	kg		3.80						
	Per circuit	TCO2Eq		2.6						
Unit	Running Max current	A		14.0						
Power supply	Phase/Frequency/Voltage	Hz/V		3~/50/400						

(1)Cooling: EW 12°C; LW 7°C; ambient conditions: 35°CDB | (2)Cooling: EW 23°C; LW 18°C; ambient conditions: 35°CDB

Air cooled mini inverter chiller

- > Choosing for an R-32 product, reduces the environmental impact with 68% compared to R-410A and leads directly to lower energy consumption thanks to its high energy efficiency
- > Inverter chiller
- > Daikin swing compressor
- > New casing for the outdoor units
- > Separate MMI-2 controller for indoor installation



More details and final information can be found by scanning or clicking the QR codes.



EWAA-DV3P-H

Cooling Only		EWAA		011DV3P-H-		014DV3P-H-		016DV3P-H-		
Space cooling	A Condition 35°C Pdc	kW		11.6		12.8		14.0		
	ηs,c	%		229		226		221		
SEER				5.79		5.71		5.59		
Cooling capacity	Nom.	kW		11.6 (1) / 11.5 (2)		12.8 (1) / 12.7 (2)		14.0 (1) / 15.3 (2)		
Power input	Cooling Nom.	kW		3.56 (1) / 2.17 (2)		4.06 (1) / 2.51 (2)		4.58 (1) / 3.24 (2)		
Capacity control	Method					Variable (inverter)				
EER				3.26 (1) / 5.31 (2)		3.16 (1) / 5.04 (2)		3.06 (1) / 4.74 (2)		
Dimensions	Unit	Height	mm		870					
		Width	mm		1,380					
		Depth	mm		460					
Weight	Unit	kg		147						
Water heat exchanger	Type			Plate heat exchanger						
	Water volume	l		2						
Air heat exchanger	Type			High efficiency fin and tube type with integral subcooler						
Compressor	Type			Hermetically sealed swing inverter compressor						
	Quantity			1						
Fan	Type			Propeller fan						
	Quantity			1						
Sound power level	Cooling	Nom.	m ³ /min		70		85			
		Nom.	dBA		67.0		69.0			
Sound pressure level	Cooling	Nom.	dBA		47.7		50.8		51.0	
Operation range	Air side	Cooling	Min.~Max.	°CDB		10~43				
	Water side	Cooling	Min.~Max.	°CDB		5~22				
Refrigerant	Type/GWP			R-32/675.0						
	Control			Electronic expansion valve						
	Circuits	Quantity			1					
Refrigerant charge	Per circuit	kg		3.80						
	Per circuit	TCO2Eq		2.6						
Unit	Running current	Max	A		30.8					
Power supply	Phase/Frequency/Voltage	Hz/V		1~/50/230						

(1)Cooling: EW 12°C; LW 7°C; ambient conditions: 35°CDB | (2)Cooling: EW 23°C; LW 18°C; ambient conditions: 35°CDB

Air cooled mini inverter chiller

- > Choosing for an R-32 product, reduces the environmental impact with 68% compared to R-410A and leads directly to lower energy consumption thanks to its high energy efficiency
- > Inverter chiller
- > Daikin swing compressor
- > New casing for the outdoor units
- > Separate MMI-2 controller for indoor installation



More details and final information can be found by scanning or clicking the QR codes.



EWAA-DW1P-H

Cooling Only		EWAA		011DW1P-H-		014DW1P-H-		016DW1P-H-		
Space cooling	A Condition 35°C Pdc	kW		11.6		12.8		14.0		
	ηs,c	%		229		226		221		
SEER				5.79		5.71		5.59		
Cooling capacity	Nom.	kW		11.6 (1) / 11.5 (2)		12.8 (1) / 12.7 (2)		14.0 (1) / 15.3 (2)		
Power input	Cooling Nom.	kW		3.56 (1) / 2.17 (2)		4.06 (1) / 2.51 (2)		4.58 (1) / 3.24 (2)		
Capacity control	Method					Variable (inverter)				
EER				3.26 (1) / 5.31 (2)		3.16 (1) / 5.04 (2)		3.06 (1) / 4.74 (2)		
Dimensions	Unit	Height	mm		870					
		Width	mm		1,380					
		Depth	mm		460					
Weight	Unit	kg		147						
Water heat exchanger	Type			Plate heat exchanger						
	Water volume	l		2						
Air heat exchanger	Type			High efficiency fin and tube type with integral subcooler						
Compressor	Type			Hermetically sealed swing inverter compressor						
	Quantity			1						
Fan	Type			Propeller fan						
	Quantity			1						
Sound power level	Cooling	Nom.	m ³ /min		70		85			
		Nom.	dBA		67.0		69.0			
Sound pressure level	Cooling	Nom.	dBA		47.7		50.8		51.0	
Operation range	Air side	Cooling	Min.~Max.	°CDB		10~43				
	Water side	Cooling	Min.~Max.	°CDB		5~22				
Refrigerant	Type/GWP			R-32/675.0						
	Control			Electronic expansion valve						
	Circuits	Quantity			1					
Refrigerant charge	Per circuit	kg		3.80						
	Per circuit	TCO2Eq		2.6						
Unit	Running	Max	A		14.0					
	current									
Power supply	Phase/Frequency/Voltage	Hz/V		3~/50/400						

(1)Cooling: EW 12°C; LW 7°C; ambient conditions: 35°CDB | (2)Cooling: EW 23°C; LW 18°C; ambient conditions: 35°CDB

Air cooled scroll inverter chiller

- › Inverter chiller
- › High part load efficiency for low running cost
- › Minimal starting currents
- › No buffertank required for standard applications
- › Daikin scroll compressor
- › Wide operation range
- › Integrated hydronic module on request



EWAT-CZ_R

More details and final information can be found by scanning or clicking the QR codes.



EWAT-CZN

Cooling Only				EWAT	016CZN-A1	021CZN-A1	025CZN-A1	032CZN-A1	040CZN-A1	040CZN-A2	050CZN-A2	064CZN-A2	090CZN-A2		
Space cooling	A Condition Pdc 35°C			kW	15.9	20.9	25.6	32.4	39.6	41.4	50.8	64.0	88.3		
	ηs,c			%	197		200	205	201	213	210	205	198		
SEER					5.00		5.06	5.21	5.09	5.41	5.33	5.21	5.03		
Cooling capacity	Nom.			kW	15.9	20.9	25.6	32.4	39.6	41.4	50.8	64.0	88.3		
Power input	Cooling Nom.			kW	5.50	6.60	8.50	10.3	13.4	13.2	17.0	21.8	31.0		
Capacity control	Method			Inverter controlled											
	Minimum capacity			%	18	14	12	19	15	14	12	15	14		
EER					2.90	3.16	3.00	3.13	2.95	3.12	2.98	2.93	2.84		
IPLV					5.83	6.29	6.05	6.25	5.87	6.37	5.92	5.88	5.61		
Dimensions	Unit	Height		mm	1,878										
		Width		mm	1,152				1,752			2,306		2,906	3,506
		Depth		mm	802									814	
Weight	Unit			kg	222	245		340	339	480		574	672		
		Operation weight		kg	223	247		343	342	486		580	680		
Water heat exchanger	Type			Braze plate heat exchanger											
	Water volume			l	1	2				5			8		
	Water flow rate	Cooling	Nom.	l/s	0.8	1.0	1.2	1.6	1.9	2.0	2.4	3.1	4.2		
Water pressure drop			Nom.	kPa	20	11	16	19	28	10	14	22	20		
Air heat exchanger	Type			High efficiency fin and tube type – Copper Aluminum											
Compressor	Type			Scroll compressor											
	Quantity			1									2		
Fan	Type			Axial											
	Quantity			1				2			3		4		
	Speed			rpm	800	900	700	900	700	900	800	900			
Sound power level	Cooling	Nom.		dBA	76.0	78.0	79.0	80.0		81.0	83.0	85.0			
Sound pressure level		Nom.		dBA	59.7	61.7	62.2	63.2	62.8	63.8	65.4	67.0			
Refrigerant	Type/GWP			R-32/675											
	Charge			kg	3.00	5.50		7.00	8.00	12.0		13.0	16.0		
	Circuits Quantity			1									2		
Piping connections Evaporator water inlet/outlet (OD)				1"1/4									2"		

Cooling: EW 12°C; LW 7°C; ambient conditions: 35°CDB | Cooling: EW 23°C; LW 18°C; ambient conditions: 35°CDB | Condition: Ta DB/WB 7°C/6°C - LWC 35°C (DT = 5°C) | Condition: Ta DB/WB 7°C/6°C - LWC 45°C (Dt=5°C) | According to EN14825 | Depends on operation mode, refer to installation manual. | For more details, see operation range drawing

Air cooled scroll inverter chiller

- › Inverter chiller
- › High part load efficiency for low running cost
- › Minimal starting currents
- › No buffertank required for standard applications
- › Daikin scroll compressor
- › Wide operation range
- › Integrated hydronic module on request



More details and final information can be found by scanning or clicking the QR codes.



EWAT-CZP

Cooling Only				EWAT	016CZP-A1	021CZP-A1	025CZP-A1	032CZP-A1	040CZP-A1	040CZP-A2	050CZP-A2	064CZP-A2	090CZP-A2	
Space cooling	A Condition Pdc 35°C			kW	16.0	21.0	25.7	32.6	39.8	41.6	51.0	64.3	88.6	
	ηs,c			%	209	213		225	211	228	216	211	204	
SEER					5.30	5.41		5.70	5.36	5.76	5.48	5.34	5.18	
Cooling capacity	Nom.			kW	16.1	21.1	25.9	32.7	39.9	41.7	51.1	64.4	88.8	
Power input	Cooling Nom.			kW	5.45	6.56	8.48	10.3	13.3	13.2	16.9	21.9	31.1	
Capacity control	Method			Inverter controlled										
	Minimum capacity			%	18	14	12	19	15	14	12	15	14	
EER					2.96	3.22	3.05	3.18	3.00	3.17	3.03	2.95	2.85	
IPLV					5.83	6.29	6.05	6.25	5.87	6.37	5.92	5.88	5.61	
Dimensions	Unit	Height		mm	1,878									
		Width		mm	1,152				1,752		2,306		2,906	3,506
		Depth		mm	802								814	
Weight	Unit			kg	256	278		383	382		531	630	727	
	Operation weight			kg	257	280		386	385		537	636	735	
Water heat exchanger	Type			Braze plate heat exchanger										
	Water volume			l	1	2				5			8	
	Water flow rate	Cooling	Nom.	l/s	0.8	1.0	1.2	1.6	1.9	2.0	2.4	3.1	4.2	
Air heat exchanger	Type			High efficiency fin and tube type – Copper Aluminum										
	Compressor			Type	Scroll compressor									
Fan	Quantity			1					2					
	Type			Axial										
	Quantity			1				2			3	4		
	Speed			rpm	800	900	700	900	700	900	800	900		
Sound power level	Cooling	Nom.	dBA	76.0	78.0	79.0	80.0		81.0	-				
Sound pressure level	Cooling	Nom.	dBA	59.7	61.7	62.2	63.2	62.8	63.8	-				
Refrigerant	Type/GWP			R-32/675										
	Charge			kg	3.00	5.50	7.00	8.00	12.0		13.0	16.0		
	Circuits Quantity			1					2					
Piping connections Evaporator water inlet/outlet (OD)				1"1/4					2"					

Cooling: EW 12°C; LW 7°C; ambient conditions: 35°CDB | Cooling: EW 23°C; LW 18°C; ambient conditions: 35°CDB | Condition: Ta DB/WB 7°C/6°C - LWC 35°C (DT = 5°C) | Condition: Ta DB/WB 7°C/6°C - LWC 45°C (Dt=5°C) | According to EN14825 | Depends on operation mode, refer to installation manual. | For more details, see operation range drawing

Air cooled scroll inverter chiller

- › Inverter chiller
- › High part load efficiency for low running cost
- › Minimal starting currents
- › No buffertank required for standard applications
- › Daikin scroll compressor
- › Wide operation range
- › Integrated hydronic module on request



More details and final information can be found by scanning or clicking the QR codes.



EWAT-CZH

Cooling Only				EWAT	016CZH-A1	021CZH-A1	025CZH-A1	032CZH-A1	040CZH-A1	040CZH-A2	050CZH-A2	064CZH-A2	090CZH-A2		
Space cooling	A Condition Pdc 35°C			kW	16.1	21.1	25.8	32.7	39.9	41.7	51.1	64.3	88.7		
	ηs,c			%	205	210	211	224	210	227	213	208	202		
Cooling capacity	Nom.			kW	16.2	21.2	25.9	32.8	40.1	41.8	51.3	64.5	88.9		
Power input	Cooling	Nom.		kW	5.60	6.70	8.70	10.4	13.5	13.3	17.0	22.0	31.2		
Capacity control	Method			Inverter controlled											
	Minimum capacity			%	18	14	12	19	15	14	12	15	14		
EER					2.89	3.15	2.98	3.14	2.97	3.15	3.02	2.93	2.85		
IPLV					5.83	6.29	6.05	6.25	5.87	6.37	5.92	5.88	5.61		
Dimensions	Unit	Height		mm	1,878										
		Width		mm	1,152				1,752			2,306		2,906	3,506
		Depth		mm	802					814					
Weight	Unit			kg	256	278		383	382	531		630	727		
	Operation weight			kg	257	280		386	385	537		636	735		
Water heat exchanger	Type			Braze plate heat exchanger											
	Water volume			l	1	2				5			8		
	Water flow rate	Cooling	Nom.	l/s	0.8	1.0	1.2	1.6	1.9	2.0	2.4	3.1	4.20		
		Cooling	Nom.	kPa	20	11	16	19	28	10	14	22	20		
Air heat exchanger	Type			High efficiency fin and tube type – Copper Aluminum											
Compressor	Type			Scroll compressor											
	Quantity			1					2						
Fan	Type			Axial											
	Quantity			1				2			3	4			
	Speed			rpm	800	900	700	900	700	900	800	900			
Sound power level	Cooling	Nom.	dBA	76.0	78.0	79.0	80.0		81.0	83.0	85.0				
Sound pressure level	Cooling	Nom.	dBA	59.7	61.7	62.2	63.2	62.8	63.8	65.4	67.0				
Refrigerant	Type/GWP			R-32/675											
	Charge			kg	3.00	5.50	7.00	8.00	12.0		13.0	16.0			
	Circuits Quantity			1					2						
Piping connections Evaporator water inlet/outlet (OD)				1"1/4					2"						

Cooling: EW 12°C; LW 7°C; ambient conditions: 35°CDB | Cooling: EW 23°C; LW 18°C; ambient conditions: 35°CDB | Condition: Ta DB/WB 7°C/6°C - LWC 35°C (DT = 5°C) | Condition: Ta DB/WB 7°C/6°C - LWC 45°C (DT=5°C) | According to EN14825 | Depends on operation mode, refer to installation manual. | For more details, see operation range drawing



Air cooled scroll inverter heat pump

- › Inverter chiller
- › High part load efficiency for low running cost
- › Minimal starting currents
- › No buffertank required for standard applications
- › Daikin scroll compressor
- › Wide operation range
- › Integrated hydronic module on request



EWYT-CZ_R

More details and final information can be found by scanning or clicking the QR codes.



EWYT-CZN

Heating & Cooling				EWYT	016CZN-A1	021CZN-A1	025CZN-A1	032CZN-A1	040CZN-A1	040CZN-A2	050CZN-A2	064CZN-A2	090CZN-A2	
Space cooling	A Condition	Pdc	kW	15.9	20.9	25.6	32.4	39.6	41.4	50.8	64.0	88.3		
	35°C													
	ηs,c		%	197	200	205	201	213	210	205	198	5.03		
SEER				5.00	5.06	5.21	5.09	5.41	5.33	5.21	5.03			
Space heating	Average climate water outlet 35°C	General	SCOP	3.89	4.00	4.07	4.06	4.07	4.02	4.00	3.98	4.00		
				Seasonal space heating eff. class	A++									
Cooling capacity	Nom.		kW	15.9	20.9	25.6	32.4	39.6	41.4	50.8	64.0	88.3		
Heating capacity	Nom.		kW	15.9	20.2	24.8	32.4	39.4	40.3	49.8	61.9	85.8		
Power input	Cooling	Nom.	kW	5.50	6.60	8.50	10.3	13.4	13.2	17.0	21.8	31.0		
		Heating	Nom.	kW	4.70	5.80	7.50	9.40	11.8	11.9	15.4	19.1	27.2	
Capacity control	Method			Inverter controlled										
	Minimum capacity		%	18	14	12	19	15	14	12	15	14		
EER				2.90	3.16	3.00	3.13	2.95	3.12	2.98	2.93	2.84		
COP				3.41	3.46	3.33	3.45	3.33	3.38	3.24	3.23	3.16		
IPLV				5.83	6.29	6.05	6.25	5.87	6.37	5.92	5.88	5.61		
Dimensions	Unit	Height	mm	1,878										
		Width	mm	1,152				1,752			2,306		2,906	3,506
		Depth	mm	802								814		
Weight	Unit	Operation weight		kg	227	252	350	349	494	588	693			
				kg	228	254	353	352	500	594	701			
Water heat exchanger	Type			Braze plate heat exchanger										
	Water volume		l	1	2				5			8		
	Water flow rate	Cooling	Nom.	l/s	0.8	1.0	1.2	1.6	1.9	2.0	2.4	3.1	4.2	
		Heating	Nom.	l/s	0.8	1.0	1.2	1.5	1.9		2.4	3.0	4.1	
	Water pressure drop	Cooling	Nom.	kPa	20	11	16	19	28	10	14	22	20	
Heating		Nom.	kPa	19.6	10.6	15.4	19.1	27.1	9.4	13.8	20.4	19.1		
Air heat exchanger	Type			High efficiency fin and tube type – Copper Aluminum										
Compressor	Type			Scroll compressor										
	Quantity			1					2					
Fan	Type			Axial										
	Quantity			1			2			3		4		
	Speed		rpm	800	900	700	900	700	900	800	900			
Sound power level	Cooling	Nom.	dBA	76.0	78.0	79.0	80.0		81.0	83.0	85.0			
Sound pressure level	Cooling	Nom.	dBA	59.7	61.7	62.2	63.2	62.8	63.8	65.4	67.0			
Refrigerant	Type/GWP			R-32/675										
	Charge		kg	3.00	5.50	7.00	8.00	12.0	13.0	16.0				
	Circuits	Quantity		1					2					
Piping connections	Evaporator water inlet/outlet (OD)			1"1/4					2"					

Cooling: EW 12°C; LW 7°C; ambient conditions: 35°CDB | Cooling: EW 23°C; LW 18°C; ambient conditions: 35°CDB | Condition: Ta DB/WB 7°C/6°C - LWC 35°C (DT = 5°C) | Condition: Ta DB/WB 7°C/6°C - LWC 45°C (DT=5°C) | According to EN14825 | Depends on operation mode, refer to installation manual. | For more details, see operation range drawing



Air cooled scroll inverter heat pump

- › Inverter chiller
- › High part load efficiency for low running cost
- › Minimal starting currents
- › No buffertank required for standard applications
- › Daikin scroll compressor
- › Wide operation range
- › Integrated hydronic module on request



EWYT-CZ_R

More details and final information can be found by scanning or clicking the QR codes.



EWYT-CZP

Heating & Cooling				EWYT	016CZP-A1	021CZP-A1	025CZP-A1	032CZP-A1	040CZP-A1	040CZP-A2	050CZP-A2	064CZP-A2	090CZP-A2
Space cooling	A Condition	Pd _c	kW	16.0	21.0	25.7	32.6	39.8	41.6	51.0	64.3	88.6	
	35°C												
	η _{s,c}		%	209	213	225	211	228	216	211	204		
SEER				5.30	5.41	5.70	5.36	5.76	5.48	5.34	5.18		
Space heating	Average climate water outlet 35°C	General	SCOP	4.03	4.19	4.18	4.19	4.12	4.01	4.04			
				Seasonal space heating eff. class									A++
Cooling capacity	Nom.		kW	16.1	21.1	25.9	32.7	39.9	41.7	51.1	64.4	88.8	
Heating capacity	Nom.		kW	15.6	19.9	24.6	32.1	39.0	40.0	49.5	61.4	85.3	
Power input	Cooling	Nom.	kW	5.45	6.56	8.48	10.3	13.3	13.2	16.9	21.9	31.1	
	Heating	Nom.	kW	4.63	5.81	7.42	9.32	11.7	11.8	15.3	19.2	27.3	
Capacity control	Method			Inverter controlled									
	Minimum capacity			%	18	14	12	19	15	14	12	15	14
EER				2.96	3.22	3.05	3.18	3.00	3.17	3.03	2.95	2.85	
COP				3.37	3.43	3.31	3.44	3.33	3.38	3.23	3.20	3.13	
IPLV				5.83	6.29	6.05	6.25	5.87	6.37	5.92	5.88	5.61	
Dimensions	Unit	Height	mm	1,878									
		Width	mm	1,152			1,752			2,306		2,906	3,506
		Depth	mm	802						814			
Weight	Unit	Operation weight		kg	261	286	393	392	546	644	749		
				kg	262	288	396	395	551	650	757		
Water heat exchanger	Type			Braze plate heat exchanger									
	Water volume			l	1	2			5		8		
	Water flow rate	Cooling	Nom.	l/s	0.8	1.0	1.2	1.6	1.9	2.0	2.4	3.1	4.2
		Heating	Nom.	l/s	0.8	1.0	1.2	1.5	1.9		2.4	3.0	4.1
	Water pressure drop	Cooling	Nom.	kPa	20	11	16	19	28	10	14	22	20
Heating		Nom.	kPa	19.6	10.6	15.4	19.1	27.1	9.4	13.8	20.4	19.1	
Air heat exchanger	Type			High efficiency fin and tube type – Copper Aluminum									
Compressor	Type			Scroll compressor									
	Quantity			1			2						
Fan	Type			Axial									
	Quantity			1			2			3	4		
	Speed			rpm	800	900	700	900	700	900	800	900	
Sound power level	Cooling	Nom.	dBA	76.0	78.0	79.0	80.0		81.0	83.0	85.0		
Sound pressure level	Cooling	Nom.	dBA	59.7	61.7	62.2	63.2	62.8	63.8	65.4	67.0		
Refrigerant	Type/GWP			R-32/675									
	Charge			kg	3.00	5.50	7.00	8.00	12.0	13.0	16.0		
	Circuits			Quantity	1			2					
Piping connections				Evaporator water inlet/outlet (OD)	1"1/4			2"					

Cooling: EW 12°C; LW 7°C; ambient conditions: 35°CDB | Cooling: EW 23°C; LW 18°C; ambient conditions: 35°CDB | Condition: Ta DB/WB 7°C/6°C - LWC 35°C (DT = 5°C) | Condition: Ta DB/WB 7°C/6°C - LWC 45°C (DT=5°C) | According to EN14825 | Depends on operation mode, refer to installation manual. | For more details, see operation range drawing



Air cooled scroll inverter heat pump

- › Inverter chiller
- › High part load efficiency for low running cost
- › Minimal starting currents
- › No buffertank required for standard applications
- › Daikin scroll compressor
- › Wide operation range
- › Integrated hydronic module on request



EWYT-CZ_R

More details and final information can be found by scanning or clicking the QR codes.



EWYT-CZH

Heating & Cooling				EWYT	016CZH-A1	021CZH-A1	025CZH-A1	032CZH-A1	040CZH-A1	040CZH-A2	050CZH-A2	064CZH-A2	090CZH-A2
Space cooling	A Condition	Pdc	kW	16.1	21.1	25.8	32.7	39.9	41.7	51.1	64.3	88.7	
	35°C												
	ηs,c		%	205	210	211	224	210	227	213	208	202	
SEER				5.20	5.32	5.34	5.67	5.34	5.76	5.40	5.27	5.12	
Space heating	Average climate water outlet 35°C	General	SCOP	3.88	4.06	4.08	4.11	4.13	4.14	4.09	3.94	4.00	
				Seasonal space heating eff. class A++									
Cooling capacity	Nom.		kW	16.2	21.2	25.9	32.8	40.1	41.8	51.3	64.5	88.9	
Heating capacity	Nom.		kW	15.5	19.8	24.5	32.0	38.9	39.9	49.4	61.3	85.2	
Power input	Cooling	Nom.	kW	5.60	6.70	8.70	10.4	13.5	13.3	17.0	22.0	31.2	
	Heating			4.80	6.00	7.60	9.50	11.9	12.0	15.4	19.3	27.4	
Capacity control	Method			Inverter controlled									
	Minimum capacity			%	18	14	12	19	15	14	12	15	14
EER				2.89	3.15	2.98	3.14	2.97	3.15	3.02	2.93	2.85	
COP				3.24	3.31	3.22	3.37	3.28	3.33	3.20	3.17	3.12	
IPLV				5.83	6.29	6.05	6.25	5.87	6.37	5.92	5.88	5.61	
Dimensions	Unit	Height	mm	1,878									
		Width	mm	1,152			1,752			2,306		2,906	3,506
		Depth	mm	802								814	
Weight	Unit	Operation weight		kg	261	286		393	392	546		644	749
				kg	262	288		396	395	551		650	757
Water heat exchanger	Type			Braze plate heat exchanger									
	Water volume			l	1	2			5			8	
	Water flow rate	Cooling	Nom.	l/s	0.8	1.0	1.2	1.6	1.9	2.0	2.4	3.1	4.2
		Heating	Nom.	l/s	0.8	1.0	1.2	1.5	1.9		2.4	3.0	4.1
	Water pressure drop	Cooling	Nom.	kPa	20	11	16	19	28	10	14	22	20
Heating		Nom.	kPa	19.6	10.6	15.4	19.1	27.1	9.4	13.8	20.4	19.1	
Air heat exchanger	Type			High efficiency fin and tube type – Copper Aluminum									
Compressor	Type			Scroll compressor									
	Quantity			1					2				
Fan	Type			Axial									
	Quantity			1			2			3		4	
	Speed			rpm	800	900	700	900	700	900	800	900	
Sound power level	Cooling	Nom.	dBA	76.0	78.0	79.0	80.0		81.0	83.0	85.0		
Sound pressure level	Cooling	Nom.	dBA	59.7	61.7	62.2	63.2	62.8	63.8	65.4	67.0		
Refrigerant	Type/GWP			R-32/675									
	Charge			kg	3.00	5.50	7.00	8.00	12.0		13.0	16.0	
	Circuits			Quantity	1					2			
Piping connections	Evaporator water inlet/outlet (OD)			1"1/4					2"				

Cooling: EW 12°C; LW 7°C; ambient conditions: 35°CDB | Cooling: EW 23°C; LW 18°C; ambient conditions: 35°CDB | Condition: Ta DB/WB 7°C/6°C - LWC 35°C (DT = 5°C) | Condition: Ta DB/WB 7°C/6°C - LWC 45°C (DT=5°C) | According to EN14825 | Depends on operation mode, refer to installation manual. | For more details, see operation range drawing

Air cooled screw chiller with free cooling, high efficiency, standard/low sound

- › Free cooling chiller for space cooling and industrial processes
- › Stepless single-screw compressor
- › Greater energy savings and reduced CO₂ emissions during cold season
- › Wide operating range: NEW OPTION 187 (high evaporator leaving temperature up to 25°C)
- › MicroTech 4 controller with superior control logic and easy interface



More details and final information can be found by scanning or clicking the QR codes.



EWAD-CFXS



EWAD-CFXL

Cooling only				EWAD-CFXS/XL	640	770	850	900	C10	C11	C12	C13	C14	C15	C16	
Cooling capacity	Nom.		kW	640 (1) / 415 (2)	772 (1) / 510 (2)	852 (1) / 583 (2)	902 (1) / 612 (2)	1,027 (1) / 701 (2)	1,089 (1) / 734 (2)	1,269 (1) / 902 (2)	1,349 (1) / 957 (2)	1,435 (1) / 963 (2)	1,493 (1) / 1,013 (2)	1,555 (1) / 1,039 (2)		
Power input	Cooling	Nom.	kW	257 (1) / 53.7 (2)	272 (1) / 62.0 (2)	293 (1) / 64.7 (2)	324 (1) / 69.8 (2)	360 (1) / 75.7 (2)	399 (1) / 83.4 (2)	397 (1) / 86.4 (2)	439 (1) / 92.8 (2)	454 (1) / 101 (2)	492 (1) / 109 (2)	530 (1) / 115 (2)		
Capacity control	Method			Stepless												
	Minimum capacity		%	12.5												
EER				2.49 (1) / 11.91 (2)	2.84 (1) / 12.44 (2)	2.90 (1) / 13.17 (2)	2.78 (1) / 12.93 (2)	2.85 (1) / 13.56 (2)	2.73 (1) / 13.05 (2)	3.19 (1) / 14.68 (2)	3.08 (1) / 14.55 (2)	3.16 (1) / 14.21 (2)	3.04 (1) / 13.72 (2)	2.93 (1) / 13.50 (2)		
IPLV				3.86	4.03	4.10	4.05	4.00	3.95	4.36	4.25	4.36	4.35	4.26		
Dimensions	Unit	Height	mm	2,565												
		Width	mm	2,480												
		Length	mm	6,300	7,200	8,100	9,000	9,000	10,800	10,800	12,540	12,620	12,670			
Weight (XS)	Unit		kg	7,760	8,340	8,900	10,160	10,420	11,900	12,540	12,620	12,670				
	Operation weight		kg	8,515	9,100	9,705	11,169	11,429	13,276	14,516	14,596	14,646				
Weight (XL)	Unit		kg	8,050	8,620	9,190	10,450	10,710	12,190	12,830	12,910	12,960				
	Operation weight		kg	8,795	9,390	9,995	11,459	11,719	13,566	14,806	14,886	14,936				
Water heat exchanger	Type			Single pass shell & tube												
	Water	Cooling	Nom.	l/s	27.8 (1) / 85 (1)	33.5 (1) / 105 (1)	37.0 (1) / 90 (1)	39.2 (1) / 101 (1)	44.6 (1) / 111 (1)	47.3 (1) / 124 (1)	55.1 (1) / 124 (1)	58.6 (1) / 110 (1)	62.4 (1) / 139 (1)	64.9 (1) / 150 (1)	67.6 (1) / 162 (1)	
	Water	Cooling	Nom.	kPa	27.8 (1) / 128 (2)	33.5 (1) / 172 (2)	37.0 (1) / 178 (2)	39.2 (1) / 198 (2)	44.6 (1) / 245 (2)	47.3 (1) / 272 (2)	55.1 (1) / 232 (2)	58.6 (1) / 259 (2)	62.4 (1) / 305 (2)	64.9 (1) / 328 (2)	67.6 (1) / 354 (2)	
	Water	volume		l	741	771	808	1,012	1,372	1,965						
Air heat exchanger	Type			High efficiency fin and tube type												
Compressor	Type			Asymmetric single screw compressor												
	Quantity			2												
Fan	Type			Direct propeller												
	Air flow rate	Nom.	l/s	50,368	60,441	70,515	80,588	95,253								
Sound power level (XS)	Cooling	Nom.	dB(A)	100	101	102	103									
Sound power level (XL)	Cooling	Nom.	dB(A)	96	97	98	99									
Sound pressure level (XS)	Cooling	Nom.	dB(A)	79	80	81	80									
Sound pressure level (XL)	Cooling	Nom.	dB(A)	76	77	77										
Operation range	Air side	Cooling	Min.~Max.	°CDB -20~45												
	Water side	Cooling	Min.~Max.	°CDB -8~25												
Refrigerant	Type/GWP			R-134a/1,430												
	Circuits	Quantity		2												
Refrigerant charge			kg/TCO ₂ Eq	64.0/91.5	73.0/104.4	81.0/115.8	91.0/130.1	107.0/153.0	112.5/160.9	124.0/177.3						
Piping connections	Evaporator water inlet/outlet (OD)			168.3mm				219.1mm				273mm				
Unit	Starting current	Max	A	605	619	658	924	971	1,030	1,073	1,086					
	Running current	Cooling	Nom.	A	404	430	467	515	568	628	636	701	720	773	825	
	Running current	Max	A	476	510	561	605	672	731	811	875	929	982			
Power supply	Phase/Frequency/Voltage		Hz/V	3~/50/400												

(1) Cooling: entering evaporator water temp. 16°C; leaving evaporator water temp. 10°C; ambient air temp. 35°C; full load operation.
 (2) Data is calculated at ambient air temperature 5°C, inlet water temperature 16°C.

Air cooled screw chiller with free cooling, high efficiency, reduced sound

- › Free cooling chiller for space cooling and industrial processes
- › Stepless single-screw compressor
- › Greater energy savings and reduced CO₂ emissions during cold season
- › Wide operating range: NEW OPTION 187 (high evaporator leaving temperature up to 25°C)
- › MicroTech 4 controller with superior control logic and easy interface



EWAD-CFXS/XL/XR

Microtech 4

More details and final information can be found by scanning or clicking the QR codes.



EWAD-CFXR

Cooling Only				EWAD-CFXR	600	740	820	870	980	C10	C11	C12	C13	C14	C15
Cooling capacity	Nom.			kW	602 (1) / 374 (2)	739 (1) / 468 (2)	821 (1) / 539 (2)	866 (1) / 562 (2)	981 (1) / 644 (2)	1,034 (1) / 670 (2)	1,229 (1) / 825 (2)	1,302 (1) / 866 (2)	1,374 (1) / 889 (2)	1,424 (1) / 909 (2)	1,476 (1) / 929 (2)
Power input	Cooling	Nom.		kW	263 (1) / 46.6 (2)	278 (1) / 56.2 (2)	299 (1) / 58.5 (2)	334 (1) / 63.1 (2)	368 (1) / 68.5 (2)	412 (1) / 74.4 (2)	403 (1) / 80.0 (2)	450 (1) / 87.5 (2)	466 (1) / 93.4 (2)	511 (1) / 103 (2)	556 (1) / 109 (2)
Capacity control	Method				Stepless										
	Minimum capacity			%	12.5										
EER					2.29 (1) / 12.91 (2)	2.66 (1) / 13.17 (2)	2.75 (1) / 14.04 (2)	2.59 (1) / 13.71 (2)	2.67 (1) / 14.33 (2)	2.51 (1) / 13.89 (2)	3.05 (1) / 15.36 (2)	2.90 (1) / 14.87 (2)	2.95 (1) / 14.7 (2)	2.79 (1) / 13.85 (2)	2.66 (1) / 13.56 (2)
IPLV					4.09	4.15	4.16	4.20	4.10	4.08	4.42	4.37	4.42	4.28	
Dimensions	Unit	Height		mm	2,565										
		Width		mm	2,480										
		Depth		mm	6,300	7,200	8,100	9,000	10,800						
Weight	Unit			kg	8,050	8,620	9,190	10,450	10,710	12,190	12,830	12,910	12,960		
	Operation weight			kg	8,795	9,390	9,995	11,459	11,719	13,566	14,806	14,886	14,936		
Water heat exchanger	Type				Single pass shell & tube										
	Water flow rate	Cooling	Nom.	l/s	26.2 (1) / 26.2 (2)	32.1 (1) / 32.1 (2)	35.7 (1) / 35.7 (2)	37.6 (1) / 37.6 (2)	42.6 (1) / 42.6 (2)	44.9 (1) / 44.9 (2)	53.4 (1) / 53.4 (2)	56.6 (1) / 56.6 (2)	59.7 (1) / 59.7 (2)	61.9 (1) / 61.9 (2)	64.1 (1) / 64.1 (2)
	Water pressure drop	Cooling	Nom.	kPa	76 (1) / 115 (2)	97 (1) / 159 (2)	84 (1) / 167 (2)	93 (1) / 184 (2)	102 (1) / 225 (2)	113 (1) / 248 (2)	92 (1) / 219 (2)	103 (1) / 243 (2)	128 (1) / 282 (2)	137 (1) / 301 (2)	146 (1) / 321 (2)
	Water volume			l	741	771	808	1,012	1,372	1,965					
Air heat exchanger	Type				High efficiency fin and tube type										
Compressor	Type				Asymm single screw										
	Quantity				2										
Fan	Type				Direct propeller										
	Quantity				10	12	14	16	20						
	Air flow rate	Nom.		l/s	38,935	46,722	54,508	62,295	73,011						
	Speed			rpm	715										
Sound power level	Cooling	Nom.		dBA	92			94			95				
Sound pressure level	Cooling	Nom.		dBA	71	72			73	72			73		
Operation range	Air side	Cooling	Min.-Max.	°CDB	-20~-45										
	Water side	Cooling	Min.-Max.	°CDB	-8~-25										
Refrigerant	Type/GWP				R-134a/1,430										
	Circuits	Quantity			2										
Refrigerant charge	Per circuit			kg	64.0	73.0	81.0	91.0	107.0	112.5	124.0				
	Per circuit			TCO ₂ Eq	91.5	104.4	115.8	130.1	153.0	160.9	177.3				
Piping connections	Evaporator water inlet/outlet (OD)				168.3mm			219.1mm			273mm				
Unit	Starting current	Max		A	598	611	648	912	960	1,016	1,059	1,072			
	Running current	Cooling	Nom.	A	411	439	473	526	580	647	645	717	738	800	862
		Max		A	462	493	542	585	649	708	783	847	901	954	
Power supply	Phase/Frequency/Voltage			Hz/V	3~/50/400										

(1) Cooling: entering evaporator water temp. 16°C; leaving evaporator water temp. 10°C; ambient air temp. 35°C; full load operation.
 (2) Data is calculated at ambient air temperature 5°C, inlet water temperature 16°C.







Over 1,000 sites around the world with screw chillers installed is demonstrating that we will never stop developing the most advanced technology with highest quality level to offer the best chiller experience to our customers.

EWA(H)(D)-TZB/C at a glance

- > Full inverter air cooled chiller
- > Capacity range from 190kW to 2,000kW for series with R134a
- > Capacity range from 170kW to 1,500kW for series with R1234ze
- > Daikin single screw compressor with integrated inverter
- > Best efficiency at full load and part load conditions

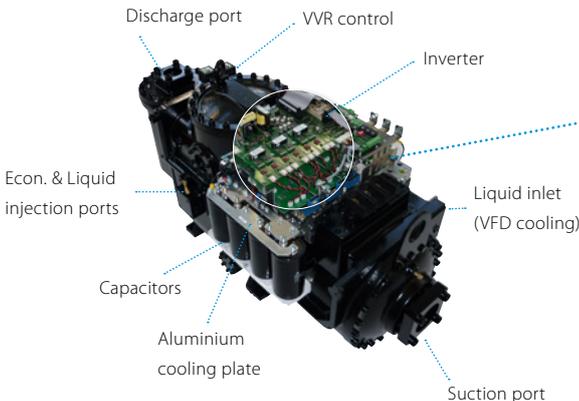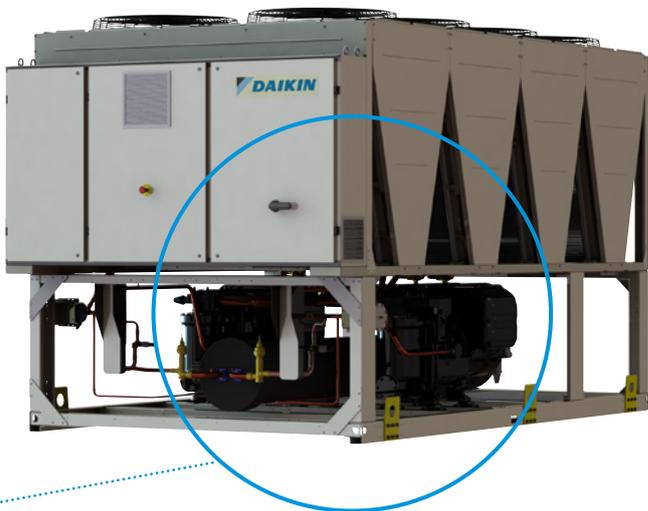

> Daikin EWAD-TZB Screw Inverter Chiller

Check on
YouTube
www.youtube.com/DaikinEurope



Web-based chiller selection software


A user-friendly interface allows users to quickly create new projects, open and change existing projects or simply do a quick selection.

Technical selection reports can be printed or downloaded in several formats.

To make life easier, the tool is accessible everywhere, via any device. No matter where you are, projects can be consulted.

Create now a new account on:

<http://tools.daikinapplied.eu/>

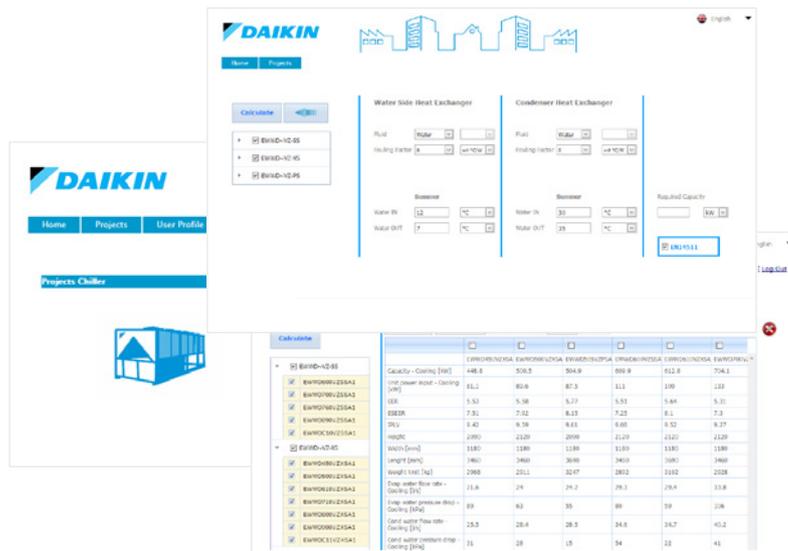

Why choose EWA(H)(D)-TZB/C?

High efficiencies both at full load and part load:

- › Daikin compressor with in-built inverter for optimized efficiency
- › In-house developed software with dynamic condensing pressure management and innovative economizer control logic

Rapid return on investment

- › Payback of three years, compared to a non-inverter unit for comfort cooling applications
- › Less than one year a for process cooling applications

Perfect comfort level

- › Infinitely variable load regulation
- › Precise leaving water temperature control thanks to stepless regulation

Compact design

- › More compact heat exchanger with superior efficiencies
- › Reduced electrical panel dimensions thanks to the inverter compressor mounted

Lowest sound levels

- › Down to 87 dB(A) sound power at full load and even lower at part load thanks to fans and compressors variable speed
- › Quiet compressor thanks to special acoustic executions
- › Unique Daikin fans design with reduced noise impact and vibrations

Unrivaled and proven reliability

- › Extensive testing of chillers and components in laboratories, Daikin factories and selected job sites - even at extreme working conditions
- › Reduced energy demand without compromising on reliability and performance

Extensive option list

More than 60 different options are available to fit the EWA(H)(D)-TZB/C chiller to fit to your requirements:

- › Rapid restart after power failure
- › Variable speed water pumps to optimise the working efficiency
- › Total heat recovery: 80 to 85% of the total heat rejection of the chiller can be recovered
- › Partial heat recovery: 15 to 20% of the total heat rejection of the chiller can be recovered
- › Refrigerant leak detection



Performance monitoring

With MT4, advanced algorithm implementation in the unit controller are possible, such as the **Performance Monitoring** (Option 186). This sensor-less algorithm calculates the unit cooling capacity by using refrigerant pressure and temperature readings. Electrical power is calculated either from compressor VFD power and fan, or directly measured through optional energy meter. As a standard(*), **no extra-hardware is required**.

(*) For TZ-B units an additional sub-cooling temperature sensor is required.



Air cooled screw inverter chiller, standard efficiency, standard/low sound

- › Optimized energy efficiency both at full and part load conditions
- › Inverter stepless single-screw compressor
- › Advanced compressor technology featuring integrated inverter and variable volume ratio (VVR)
- › Compact design for small footprint and minimized installation space
- › Low operating sound levels are achieved by the latest compressor and fan design
- › One or two truly independent refrigerant circuits for outstanding reliability



More details and final information can be found by scanning or clicking the QR codes.



EWAD-TZSSB



EWAD-TZSLB

Cooling Only				EWAD-TZSSB/SLB																															
				160	190	240	270	300	360	380	455	500	570	610	660	700	820	900	990	C10	C11														
Space cooling	A Condition 35°C Pdc			kW			169.1	200.88	235.29	268.82	305.99	351.41	394.74	455.64	499.81	569.52	612.22	660.72	700.94	815.92	889.95	987.19	1,045.39	1,103.99											
	ηs,c			%			168.2	172.6	169.4	175.4	177	183	172.6	171.4	175	180.2	189.8	182.6	185.4	197.4	194.2	200.6	200.2	200.6											
SEER							4.28	4.39	4.31	4.46	4.5	4.65	4.39	4.63	4.65	4.58	4.82	4.64	4.71	5.01	4.93	5.09	5.08	5.09											
Cooling capacity	Nom.			kW			169.1	200.9	235.3	268.8	306	351.4	394.7	455.6	499.8	569.5	612.2	660.7	700.9	816	890	987	1,045	1,104											
Power input	Cooling		Nom.	kW			56.48	69.9	82.99	89.94	108.6	118	139.4	163.8	174.6	198.1	217.6	239	249.1	257.9	296.1	321.3	346.4	366.2											
Capacity control	Minimum capacity			%			37	31	34	29	25	24	16	17	16	14	13	12			10														
EER							2.995	2.874	2.835	2.989	2.817	2.954	2.832	2.783	2.862	2.876	2.813	2.764	2.813	3.164	3.005	3.072	3.017	3.015											
ESEER							4.37	4.46	4.3	4.4	4.42	4.5	4.46	4.44	4.49	4.54	4.59	4.63	4.7	4.43		4.44		4.51											
IPLV							5.3	5.27	5.04	5.19	5.37	5.53	5.34	5.3	5.46	5.64	5.62	5.7	5.29	5.26	5.25	5.26	5.27												
Dimensions	Unit	Height		mm			2,540																												
		Width		mm			2,282																												
		Depth		mm			2,330			3,230			4,130			5,030			5,887			6,786			6,877			7,787			8,687			9,587	
Weight (SSB)	Unit		kg			2,066	2,091	2,149	2,375	2,422	2,771	4,044	4,060	4,317	4,603	4,780	4,804	5,074	6,282	6,382	6,777	7,132	7,410												
	Operation weight			kg			2,086	2,117	2,187	2,401	2,460	2,821	4,202	4,224	4,475	4,761	5,050	5,059	5,329	6,532	6,632	7,027	7,382	7,660											
Weight (SLB)	Unit		kg			2,081	2,106	2,164	2,390	2,437	2,786	4,074	4,090	4,347	4,633	4,810	4,834	5,104	6,282	6,382	6,777	7,132	7,410												
	Operation weight			kg			2,101	2,132	2,202	2,416	2,475	2,836	4,232	4,254	4,505	4,791	5,080	5,089	5,359	6,532	6,632	7,027	7,382	7,660											
Water heat exchanger	Type			Plate heat exchanger																															
	Water volume		l			2025	261	37.35	261	37.35	49.5	158	164	158	270	255	283		485	453															
	Water flow rate		Cooling	Nom.	l/s			8.1	9.6	11.2	12.9	14.6	16.8	18.9	21.8	23.9	27.3	29.3	31.6	33.5	39.1	42.6	47.2	50	52.8										
Water pressure drop		Cooling	Nom.	kPa			25	19.3	15.4	32.6	25.2		25.9	32.4	44	55.7	38.8	32.3	36	52.6	36.9	42.2	46.6	37.3											
Air heat exchanger	Type			Microchannel																															
Compressor	Type			Driven vapour compression																															
	Quantity			1																		2													
Fan	Type			Direct propeller																															
	Quantity			4			6			8			10			12			14			16			18			20							
	Air flow rate		Nom.	l/s			15,109			22,664			30,219			37,774			45,328			52,883			69,177			79,060			88,942			98,825	
Speed		rpm			700																														
Sound power level (SSB)	Cooling	Nom.	dBA			96			97			98			99			100			101			102			105			102			103		
Sound power level (SLB)	Cooling	Nom.	dBA			90			91			92			93			94			95			96			97			99			100		
Sound pressure level (SSB)	Cooling	Nom.	dBA			77			78			79			80			82			84			81											
Sound pressure level (SLB)	Cooling	Nom.	dBA			71			72			73			74			75			76			77			78								
Operation range	Air side		Cooling	Min.~Max.	°CDB			-18 ~50															-18~45												
	Water side		Cooling	Min.~Max.	°CDB			-8~18															-15~20												
Refrigerant	Type/GWP			R-134a/1,430																															
	Charge			kg			27	29	33	38	41	52	58	59	68	75	77	83	90	91	104	117	130												
	Circuits		Quantity	1																		2													
Refrigerant charge	Per circuit			TCO2eq			38.6	41.5	47.2	54.3	58.6	74.4	41.5	42.2	48.6	53.6	55.1	59.3	64.4	65.1	74.4	83.7	93.0												
Piping connections	Evaporator water inlet/outlet (OD)			3"			4"			5"			6"			168.3 mm			219.1mm																
Unit	Running current	Cooling	Nom.	A			102	123	188	177	188	200	246	372	366	361	377	396	414	429	501	528	563	597											
		Max	A			130	149	160	187	220	246	298	320	350	374	439	466	486	537	599	652	708	768												
Power supply	Phase/Frequency/Voltage			Hz/V			3~/50/400																												

performances according to CSS software 10.27



Air cooled screw inverter chiller, standard efficiency, reduced sound

- › Optimized energy efficiency both at full and part load conditions
- › Inverter stepless single-screw compressor
- › Advanced compressor technology featuring integrated inverter and variable volume ratio (VVR)
- › Compact design for small footprint and minimized installation space
- › Low operating sound levels are achieved by the latest compressor and fan design
- › One or two truly independent refrigerant circuits for outstanding reliability



More details and final information can be found by scanning or clicking the QR codes.



EWAD-TZSRB

Cooling Only				EWAD-TZSRB																									
				160	190	240	270	300	360	380	455	500	570	610	660	700	820	900	990	C10	C11								
Space cooling	A Condition 35°C Pdc ηs,c	kW		169.1	200.88	235.29	268.82	305.99	351.41	394.01	454.57	499.14	568.6	610.43	658.99	699.87	799.95	894.94	956.14	1,013.27	1,067.02								
		%		168.2	172.6	169.4	175.4	177	183	172.2	170.6	174.2	179.4	188.6	181.8	184.6	215	213.4	213.8	216.2	217.8								
SEER				4.28	4.39	4.31	4.46	4.5	4.65	4.38	4.63	4.64	4.56	4.79	4.62	4.69	5.45	5.41	5.42	5.48	5.52								
Cooling capacity	Nom.	kW		169.1	200.9	235.3	268.8	306	351.4	394	454.6	499.1	568.6	610.4	659	699.9	800	895	956	1,013	1,067								
Power input	Cooling	kW		56.48	69.9	82.99	89.94	108.6	118	140.2	164.8	175.4	199.1	218.4	240.3	250.3	247.8	294.1	316	335.6	358.9								
Capacity control	Minimum capacity	%		37	31	34	29	25	24	16	17	16	14	13	12				10										
EER				2.995	2.874	2.835	2.989	2.817	2.954	2.81	2.759	2.846	2.856	2.795	2.742	2.796	3.229	3.043	3.016	3.018	2.973								
ESEER				4.37	4.46	4.3	4.4	4.42	4.5	4.44	4.43	4.47	4.53	4.61	4.6	4.68	4.8	4.85	4.83	4.98									
IPLV				5.3	5.27	5.04	5.19	5.37	5.53	5.3	5.26	5.43	5.6	5.61	5.6	5.67	5.92	5.74	5.77	5.75	5.86								
Dimensions	Unit	Height	mm	2,540																									
		Width	mm	2,282																									
		Length	mm	2,330			3,230			4,130			5,030			5,887			6,786		7,787		8,687		9,587		10,488		
Weight	Unit	kg		2,166	2,191	2,249	2,475	2,522	2,871	4,244	4,260	4,517	4,803	4,980	5,004	5,274	6,997	7,097	7,452	7,730	8,023								
		Operation weight		kg	2,186	2,217	2,287	2,501	2,560	2,921	4,402	4,424	4,675	4,961	5,250	5,259	5,529	7,247	7,347	7,702	7,980	8,273							
Water heat exchanger	Type			Plate heat exchanger								Shell and tube																	
		Water volume		l	20.25	26.1	37.35	26.1	37.35	49.5	158	164	158	270	255	283				485		453							
		Water flow rate	Cooling	Nom.	l/s	8.1	9.6	11.2	12.9	14.6	16.8	18.8	21.7	23.9	27.2	29.2	31.5	33.5	38.3	42.8	45.7	48.5	51						
		Water pressure drop	Cooling	Nom.	kPa	25	19.3	15.4	32.6	25.2	25.9	25.8	32.2	43.9	55.5	38.6	32.2	35.9	52.1	36.3	41	45.6	36.3						
Air heat exchanger	Type	Microchannel																											
Compressor	Type	Driven vapour compression																											
	Quantity	1									2																		
Fan	Type	Direct propeller																											
		Quantity	4				6				8				10			12		14		16		18		20		22	
		Air flow rate	Nom.		l/s		15,109		22,664		30,219		29,650		36,920		44,475		51,745		59,299		66,570		74,124		81,394		
		Speed	rpm		700																								
Sound power level	Cooling	Nom.		dBA		86		87		88		90			91		92		94		95								
Sound pressure level	Cooling	Nom.		dBA		67		68		69		70			71		73												
Operation range	Air side	Cooling	Min.~Max.	°CDB		-18~50									-18~45														
				Water side	Cooling	Min.~Max.	°CDB		-8~18									-15~20											
Refrigerant	Type/GWP	R-134a/1,430																											
	Charge	kg		27	29	33	38	41	52	58	59	68	75	77	83	90	104	117	130	143									
	Circuits	Quantity		1									2																
Refrigerant charge	Per circuit	TCO2Eq		38.6	41.5	47.2	54.3	58.6	74.4	41.5	42.2	48.6	53.6	55.1	59.3	64.4	74.4	83.7	93.0	102.2									
Piping connections	Evaporator water inlet/outlet (OD)	3"		4"				5"				6"				168.3 mm		219.1mm											
Unit	Running current	Cooling	Nom.	A		102	123	188	177	188	200	247	374	368	363	378	398	416	422	496	530	561	599						
				Max		A	130	149	160	187	220	246	298	320	350	374	439	466	486	523	585	635	688	745					
Power supply	Phase/Frequency/Voltage	Hz/V		3~/50/400																									

performances according to CSS software 10.27



Air cooled screw inverter chiller, high efficiency, standard/low sound

- › High energy efficiency both at full and part load conditions
- › Inverter stepless single-screw compressor with DC electrical motor
- › Advanced compressor technology featuring integrated inverter and variable volume ratio (VVR)
- › Continuous fans speed modulation thanks to inverter driven fans to improve part load efficiency
- › Compact design for small footprint and minimized installation space
- › Low operating sound levels are achieved by the latest compressor and fan design
- › One or two truly independent refrigerant circuits for outstanding reliability



More details and final information can be found by scanning or clicking the QR codes.



EWAD-TZXS



EWAD-TZSLB

Cooling Only		EWAD-TZXS/SLB																		
Space cooling (XSB) A Condition 35°C Pdc		190	220	240	290	320	360	420	450	540	570	610	660	680	770	850	910	C10	C11	
Space cooling (XSB) A Condition 35°C Pdc	kW	180.41	211.34	239.54	203	202.6	195.4	198.2	199.8	201	563.39	599.41	639.37	678.22	763.88	850.16	911.93	1,001.2	1,045.43	
	%	195	198.6	195.4	5.15	5.14	4.96	5.03	5.07	5.1	198.6	203.8	206.2	205.4	228.6	226.6	233.4	243	237	
Space cooling (XLB) A Condition 35°C Pdc	kW	180.41	211.34	239.54	276.79	313.2	360.56	417.27	472.59	528.99	563.39	599.41	639.37	678.22	763.88	850.16	911.93	1,001.2	1,045.43	
	%	195	198.6	195.4	203	202.6	195.4	198.2	199.8	201	198.6	203.8	206.2	205.4	228.6	226.6	233.4	243	237	
SEER		4.95	5.04	4.96	5.15	5.14	4.96	5.03	5.07	5.1	5.04	5.17	5.23	5.21	5.79	5.74	5.91	6.15	6	
Cooling capacity	Nom.	kW																		
Power input	Cooling	kW																		
Capacity control	Minimum capacity	%																		
EER		3.46	3.343	3.304	3.3	3.127	3.304	3.156	3.261	3.236	3.111	3.127	3.164	3.085	3.374	3.195	3.306	3.3	3.265	
ESEER		5.11	5.06	4.99	5.09	5.13	5.14	5.09	5	5.07	5.11	5.15	5.09	5.09	5.13	5.15	5.22			
IPLV		6.26	6.15	6.19	6.17	6.4	6.3	6.22	6.29	6.31	6.25	6.21	6.26	6.08	6.19	6.29	6.24			
Dimensions	Unit																			
	Height	mm																		
	Width	mm																		
Weight (XSB)	Unit	kg																		
	Operation weight	kg																		
	Weight (XLB)	kg																		
Water heat exchanger	Type	Plate heat exchanger																		
	Water volume	l																		
	Water flow rate	Cooling	l/s																	
Air heat exchanger	Type	Microchannel																		
	Compressor	Driven vapour compression																		
	Fan	Direct propeller																		
Sound power level (XSB)	Cooling	dB(A)																		
	Sound pressure level (XSB)	Cooling	dB(A)																	
	Operation range	Air side	°CDB																	
Refrigerant	Type/GWP (XSB)	R-134a/1,430																		
	Type/GWP (XLB)	R-134a/-																		
	Charge	kg																		
Refrigerant charge	Per circuit	T _{CO2} Eq																		
	Piping connections	Evaporator water inlet/outlet (OD)																		
	Unit	Running current	A																	
Power supply	Phase/Frequency/Voltage	Hz/V																		

performances according to CSS software 10.27



Air cooled screw inverter chiller, high efficiency, reduced sound

- › High energy efficiency both at full and part load conditions
- › Inverter stepless single-screw compressor with DC electrical motor
- › Advanced compressor technology featuring integrated inverter and variable volume ratio (VVR)
- › Continuous fans speed modulation thanks to inverter driven fans to improve part load efficiency
- › Compact design for small footprint and minimized installation space
- › Low operating sound levels are achieved by the latest compressor and fan design
- › One or two truly independent refrigerant circuits for outstanding reliability



More details and final information can be found by scanning or clicking the QR codes.



EWAD-TZXR

Cooling Only				EWAD-TZXR																								
				190	220	240	290	320	360	420	450	540	570	610	660	680	770	850	910	C10	C11							
Space cooling	A Condition 35°C Pdc			kW	180.41	211.34	239.54	276.79	313.2	360.28	416.8	472.11	528.32	562.28	598.77	638.64	677.38	763.85	850.14	911.93	1,001.2	1,045.41						
	ηs,c			%	195	198.6	195.4	203	202.6	194.6	198.2	199	200.2	198.2	202.6	205	204.6	229.8	229.4	233.4	244.2	237.8						
SEER				4.95	5.04	4.96	5.15	5.14	4.94	5.03	5.05	5.08	5.03	5.14	5.2	5.19	5.82	5.81	5.91	6.18	6.02							
Cooling capacity	Nom.			kW	180.4	211.3	239.5	276.8	313.2	360.3	416.8	472.1	528.3	562.3	598.8	638.6	677.4	764	850	912	1,001	1,045						
Power input	Cooling	Nom.		kW	52.13	63.22	72.5	83.87	100.2	109.5	132.1	145.6	164.3	181.9	192.5	202	220.9	226.5	266.8	275.4	303.1	320.6						
Capacity control	Minimum capacity			%	34	29	34	29	25	17	16	17	16	15	14	13			10									
EER				3.46	3.343	3.304	3.3	3.127	3.29	3.156	3.243	3.215	3.092	3.111	3.146	3.067	3.373	3.186	3.311	3.302	3.26							
ESEER				5.11	5.06	4.99	5.09	5.13	5.12	5.09	4.99	5.04	5.05	5.13	5.07	5.09	5.13	5.15	5.22									
IPLV				6.26	6.15	6.19	6.17	6.37	6.3	6.2	6.26	6.27	6.24	6.18	6.26	6.08	6.19	6.29	6.24									
Dimensions	Unit	Height	mm	2,540																								
		Width	mm	2,282																								
		Length	mm	3,230			4,130			5,030			5,887			6,786		7,684		7,787		8,687		9,587		10,488		
Weight	Unit	Operation weight	kg	2,462	2,509	2,521	2,870	4,492	4,802	5,000	5,272	5,625	6,997	7,097	7,452	7,730	8,023											
		Water heat exchanger	Type	Plate heat exchanger																								
Water heat exchanger	Type	Water volume	l	26.1	37.35	49.5	158	255	301	485	453																	
		Water flow rate	Cooling	Nom.	l/s	8.6	10.1	11.5	13.2	15	17.2	19.9	22.6	25.3	26.9	28.6	30.5	32.4	36.6	40.7	43.6	47.9	50					
		Water pressure drop	Cooling	Nom.	kPa	16.4	13.2	16.2	17.1	21	34.2	31.1	39.7	36.6	41	27.1	30.4	33.2	40.3	33.3	37.3	42.3	34.2					
Air heat exchanger	Type	Microchannel																										
Compressor	Type	Driven vapour compression																										
	Quantity	1			2																							
Fan	Type	Direct propeller																										
	Quantity	6			8			10			12			14		16		18		20		22						
	Air flow rate	Nom.	l/s	22,664			30,219			36,920			44,475			51,745		59,299		66,570		74,124		81,394				
Speed	rpm	700																										
Sound power level	Cooling	Nom.	dBa	88			89			90			91			92		94		95								
Sound pressure level	Cooling	Nom.	dBa	68			69			70			71		73													
Operation range	Air side	Cooling	Min.~Max.	°CDB			-18~55								-18~53													
	Water side	Cooling	Min.~Max.	°CDB			-8~18								-15~20													
Refrigerant	Type/GWP	R-134a/1,430																										
	Charge	kg	36	39	40	51	64	74	80	89	96	104	117	130	143													
	Circuits	Quantity	1			2																						
Refrigerant charge	Per circuit	TCO2Eq	51.5	55.8	57.2	72.9	45.8	52.9	57.2	63.6	68.6	74.4	83.7	93.0	102.2													
Piping connections	Evaporator water inlet/outlet (OD)	3"			4"			5"			6"		168.3 mm		219.1mm													
Unit	Running current	Cooling	Nom.	A	110	113	186	192	226	231	373.0	385	393	391	389	396	395	453	471	502	539							
		Max	A	130	149	166	198	225	256	292	333	358	385	417	450	478	508	562	590	640	694							
Power supply	Phase/Frequency/Voltage	Hz/V	3~/50/400																									

performances according to CSS software 10.27



Air cooled screw inverter chiller, premium efficiency, standard/low sound

- › Premium energy efficiency both at full and part load conditions
- › Inverter stepless single-screw compressor with DC electrical motor
- › Advanced compressor technology featuring integrated inverter and variable volume ratio (VVR)
- › Continuous fans speed modulation with EC fans for even higher part load efficiency
- › Compact design for small footprint and minimized installation space
- › Low operating sound levels are achieved by the latest compressor and fan design
- › One or two truly independent refrigerant circuits for outstanding reliability



More details and final information can be found by scanning or clicking the QR codes.



EWAD-TZPSB



EWAD-TZPLB

Cooling Only				EWAD-TZPSB/PLB																
				190	220	240	290	300	350	420	495	550	620	720	820	950				
Space cooling	A Condition 35°C Pdc			kW			183.62	216.12	244.42	281.93	323.37	378.96	437.31	501.15	543.03	620	717	832.86	949.85	
	ηs,c			%			204.6	210.2	208.6	209	217	207	211.4	221.8	219	241.4	245.8	249	249.4	
SEER							5.19	5.33	5.29	5.3	5.5	5.25	5.36	5.62	5.55	6.11	6.22	6.3	6.31	
Cooling capacity	Nom.			kW			183.6	216.1	244.4	281.9	323.4	379	437.3	501.2	543	620	717	833	950	
Power input	Cooling	Nom.		kW			50.48	60.72	68.74	83.43	95.89	104.6	124.9	139.1	151.4	178.8	182.3	220.4	252.5	
Capacity control	Minimum capacity			%			34	29	34	29	27	19	20	17	10					
EER							3.637	3.559	3.555	3.379	3.372	3.623	3.502	3.603	3.586	3.468	3.933	3.78	3.763	
ESEER							5.54	5.51	5.42	5.4	5.35	5.48	5.45	5.5	5.42	5.59	5.54	5.55		
IPLV							6.49	6.35	6.41	6.35	6.21	6.52	6.58	6.55	6.51	6.47	6.73	6.6	6.64	
Dimensions	Unit	Height	mm			2,540														
		Width	mm			2,282														
		Length	mm			4,130			5,030	5,887	6,786	7,684	8,579	9,480	9,587	10,488	11,387			
Weight (PSB)	Unit	kg			2,758	2,769	2,770	3,020	4,735	5,069	5,077	6,527	6,555	7,650	7,943	8,240				
	Operation weight		kg			2,808	2,819	2,820	3,070	4,990	5,324	5,332	6,777	6,805	7,900	8,193	8,490			
Weight (PLB)	Unit	kg			2,773	2,784	2,785	3,035	4,765	5,099	5,107	6,527	6,555	7,650	7,943	8,240				
	Operation weight		kg			2,823	2,834	2,835	3,085	5,020	5,354	5,362	6,777	6,805	7,900	8,193	8,490			
Water heat exchanger	Type	Plate heat exchanger																		
	Water volume		l			49.5			255			307			485			453		
	Water flow rate	Cooling	Nom.	l/s			8.8	10.3	11.7	13.5	15.5	18.1	20.9	24	26	29.6	34.3	39.8	45.4	
Air heat exchanger	Type	Microchannel																		
	Compressor	Type	Driven vapour compression																	
Fan	Quantity	1			2															
	Type	Direct propeller																		
Sound power level (PSB)	Quantity	8			10	12	14	16	18	20	22	24								
	Air flow rate	Nom.		l/s			29,610	37,013	44,415	51,818	59,220	66,623	74,025	81,428	88,830					
	Speed	rpm			700															
Sound power level (PLB)	Cooling	Nom.		dBA			97			98	99		100			101				
Sound pressure level (PSB)	Cooling	Nom.		dBA			91	92	91	92	94			97						
Sound pressure level (PLB)	Cooling	Nom.		dBA			77			78	77	78			79					
Sound pressure level (PLB)	Cooling	Nom.		dBA			71	72	71	72	73	72	73			75				
Operation range	Air side	Cooling	Min.-Max.		°CDB			-18~55									-18~53			
	Water side	Cooling	Min.-Max.		°CDB			-8~18									-15~20			
Refrigerant	Type/GWP	R-134a/1,430																		
	Charge	kg			49	50	51	58	77	86	94	105	114	130	143	156				
	Circuits	Quantity			1			2												
Refrigerant charge	Per circuit		tCO ₂ Eq			70.1	71.5	72.9	82.9	55.1	61.5	67.2	75.1	81.5	93.0	102.2	111.5			
Piping connections	Evaporator water inlet/outlet (OD)			3"			4"			6"			168.3 mm			219.1mm				
	Unit	Running current	Cooling	Nom.		A			101	104	172	177	208	211	346	258	298	316	375	424
Power supply	Phase/Frequency/Voltage			Hz/V			3~/50/400													

performances according to CSS software 10.27



Air cooled screw inverter chiller, premium efficiency, reduced sound

- › Premium energy efficiency both at full and part load conditions
- › Inverter stepless single-screw compressor with DC electrical motor
- › Advanced compressor technology featuring integrated inverter and variable volume ratio (VVR)
- › Continuous fans speed modulation with EC fans for even higher part load efficiency
- › Compact design for small footprint and minimized installation space
- › Low operating sound levels are achieved by the latest compressor and fan design
- › One or two truly independent refrigerant circuits for outstanding reliability



More details and final information can be found by scanning or clicking the QR codes.



EWAD-TZPRB

Cooling Only				EWAD-TZPRB	190	220	240	290	300	350	420	495	550	620	720	820	950
Space cooling	A Condition 35°C Pdc			kW	187.3	218.24	246.75	279.23	317.21	382.29	436.87	505.48	543.03	620.04	717	832.86	949.86
	ηs,c			%	208.6	212.2	210.6	207	212.2	208.2	210.2	221	218.2	219.8	248.6	249.4	251
SEER					5.29	5.38	5.34	5.25	5.38	5.28	5.33	5.6	5.53	5.57	6.29	6.31	6.35
Cooling capacity	Nom.			kW	187.3	218.2	246.8	279.2	317.2	382.3	436.9	505.5	543	620	717	833	950
Power input	Cooling	Nom.		kW	50.48	60.72	68.74	83.42	95.88	105.1	125.3	139.7	151.3	178.5	182.2	220.2	252.4
Capacity control	Minimum capacity			%	34	29	34	29	27	19	20	17	10				
EER					3.71	3.594	3.59	3.347	3.308	3.637	3.486	3.618	3.59	3.473	3.935	3.783	3.764
ESEER					5.55	5.52	5.27	5.16	5.2	5.32	5.21	5.38	5.5	5.42	5.59	5.54	5.55
IPLV					6.49	6.35	6.23	6.07	6.04	6.3	6.27	6.47	6.53	6.47	6.73	6.6	6.64
Dimensions	Unit	Height		mm	2,540												
		Width		mm	2,282												
		Length		mm	4,130			5,030		5,887	6,786	7,684	8,579	9,480	9,587	10,488	11,387
Weight	Unit			kg	2,858	2,869	2,870	3,120	4,935	5,269	5,277	6,677	6,705	7,970	8,263	8,560	
	Operation weight			kg	2,908	2,919	2,920	3,170	5,190	5,524	5,532	6,927	6,955	8,220	8,513	8,810	
Water heat exchanger	Type			Plate heat exchanger						Shell and tube							
	Water volume			l	49.5						255		307		485		453
	Water flow rate	Cooling	Nom.	l/s	9	10.4	11.8	13.3	15.2	18.3	20.9	24.2	26	29.6	34.3	39.8	45.4
	Water pressure drop	Cooling	Nom.	kPa	10.6	11	13.4	17.1	21.5	20.4	26.4	33.2	19.8	24.9	24.2	31.7	28.9
Air heat exchanger	Type			Microchannel													
Compressor	Type			Driven vapour compression													
	Quantity			1						2							
Fan	Type			Direct propeller													
	Quantity			8				10	12	14	16	18	20	22	24		
	Air flow rate Nom.			l/s	29,610				37,013	43,369	50,423	57,826	64,879	72,282	79,336	86,738	
	Speed			rpm	700												
Sound power level	Cooling	Nom.		dB(A)	87	88	87	88	89	90	94	95					
	Sound pressure level	Cooling	Nom.	dB(A)	67	68	67	68			69	73					
Operation range	Air side	Cooling	Min.-Max.	°CDB	-18~55										-18~53		
	Water side	Cooling	Min.-Max.	°CDB	-8~18										-15~20		
Refrigerant	Type/GWP			R-134a/1,430													
	Charge			kg	49	50	51	58	77	86	94	105	114	130	143	156	
	Circuits	Quantity		1						2							
Refrigerant charge	Per circuit			TCO2Eq	70.1	71.5	72.9	82.9	55.1	61.5	67.2	75.1	81.5	93.0	102.2	111.5	
Piping connections	Evaporator water inlet/outlet (OD)			3"				4"				6"				219.1mm	
	Unit	Running current	Cooling Nom. Max	A	101	104	172	177	209	212	347	259	300	317	377	426	
Power supply	Phase/Frequency/Voltage			Hz/V	3~/50/400												

performances according to CSS software 10.27

Air cooled screw inverter chiller, standard efficiency, standard/low sound

- › Optimized energy efficiency both at full and part load conditions
- › Inverter stepless single-screw compressor
- › Advanced compressor technology featuring integrated inverter and variable volume ratio (VVR)
- › HFO R1234zeE Refrigerant with Ozone Depletion Potential equal to zero and extremely low Global Warming Potential
- › Low operating sound levels are achieved by the latest compressor and fan design
- › One or two truly independent refrigerant circuits for outstanding reliability
- › Compact design for small footprint and minimized installation space



More details and final information can be found by scanning or clicking the QR codes.



EWAH-TZSSB



EWAH-TZSLB

Cooling Only		EWAH-TZSSB/SLB												
		170	200	240	290	330	390	420	490	530	600			
Space cooling	A Condition 35°C Pdc	kW	170.68	199.73	240.35	293.87	326.19	393.7	421.46	490.52	528.28	598.77		
	ηs,c	%	166.8	169.44	179.68	186.68	180.56	181.08	180.56	187.04	186.72	190.68		
SEER			4.245	4.311	4.567	4.742	4.589	4.602	4.589	4.751	4.743	4.842		
Cooling capacity	Nom.	kW	171	200	240	294	326	394	421	491	528	599		
Power input	Cooling Nom.	kW	55.4	69.4	83.3	97.5	115	131	146	170	188	212		
Capacity control	Method		Variable											
	Minimum capacity	%	33.4	28.6	23.6	18.7		14.3	13.4	11.8	11.2	10		
EER			3.08	2.88	2.89	3.02	2.82	2.99	2.88		2.8	2.82		
IPLV			5.19	5.22	5.5	5.73	5.52	5.18	5.16	5.4	5.31	5.41		
Dimensions	Unit		2,540											
	Height	mm	2,282											
	Width	mm	2,330											
Weight	Unit	kg	2,160.6			2,170.6		2,449.4		2,559.4		2,540		
	Operation weight	kg	2,186.7			2,207.95		2,486.75		2,608.9		2,540		
			4,329.2			4,323.2		4,890		4,867		5,867		
Water heat exchanger	Type		Plate heat exchanger					Shell and tube						
	Water volume	l	26		37		50		159		153		256	
	Water flow rate	Cooling Nom. l/s	8.2		9.5		11.5		14		15.6		18.8	
Air heat exchanger	Type		Microchannel											
	Compressor	Type	Driven vapour compression											
Fan	Quantity		1				2							
	Type		Direct propeller											
	Quantity		4			6			10			12		
Sound power level (SSB)	Cooling Nom.	dB(A)	97.07			97.53			100.19			101.14		
			91.73			92.13			94.69			96.44		
Sound pressure level (SSB)	Cooling Nom.	dB(A)	78.10			78.60			80.7			81.70		
			72.78			73.17			75.2			76.96		
Operation range	Air side Cooling	Min.~Max. °CDB	-18~50											
	Water side Cooling	Min.~Max. °CDB	-8~18											
Refrigerant	Type/GWP		R-1234(ze)/7											
	Charge	kg	27.6			41.4			64.2			78		
	Circuits	Quantity	1				2							
Piping connections	Evaporator water inlet/outlet (OD)		88.9mm			114.3mm			139.7mm			168.3mm		
Unit	Running current	Cooling Nom. A	93.0			114.0			137.0			158.0		
		Max A	132.0			156.0			217.0			236.0		
Power supply	Phase/Frequency/Voltage	Hz/V	3~/50/400											

Air cooled screw inverter chiller, standard efficiency, reduced sound

- › Optimized energy efficiency both at full and part load conditions
- › Inverter stepless single-screw compressor
- › Advanced compressor technology featuring integrated inverter and variable volume ratio (VVR)
- › HFO R1234zeE Refrigerant with Ozone Depletion Potential equal to zero and extremely low Global Warming Potential
- › Low operating sound levels are achieved by the latest compressor and fan design
- › One or two truly independent refrigerant circuits for outstanding reliability
- › Compact design for small footprint and minimized installation space



More details and final information can be found by scanning or clicking the QR codes.



EWAH-TZSRB

Cooling Only				EWAH-TZSRB	170	200	240	290	330	390	420	490	530	600
Space cooling	A Condition 35°C Pdc		kW	170.68	199.73	240.35	293.87	326.19	393.39	421.08	489.94	527.57	597.68	
	ηs,c		%	166.8	169.44	179.68	186.68	180.56	180.04	181.36	187.4	185.56	189.6	
SEER				4.245	4.311	4.567	4.742	4.589	4.576	4.609	4.76	4.714	4.815	
Cooling capacity	Nom.		kW	171	200	240	294	326	393	421	490	528	598	
Power input	Cooling	Nom.	kW	55.4	69.4	83.3	97.5	115	132	146	171	189	214	
	Capacity control	Method		Variable										
	Minimum capacity		%	33.4	28.6	23.6	18.7		14.3	13.4	11.8	11.2	10	
EER				3.08	2.88	2.89	3.02	2.82	2.98	2.87	2.86	2.78	2.79	
IPLV				5.19	5.22	5.5	5.73	5.52	5.13	5.22	5.38	5.29	5.38	
Dimensions	Unit	Height	mm	2,540										
		Width	mm	2,282										
		Length	mm	2,330		3,230			5,030			5,887		6,009
Weight	Unit		kg	2,260.6	2,270.6	2,549.4	2,719.4		4,370.2		4,834		5,939	
	Operation weight		kg	2,286.7	2,307.95	2,586.75	2,768.9		4,529.2	4,523.2	5,090	5,067	6,187	
Water heat exchanger	Type			Plate heat exchanger					Shell and tube					
	Water volume		l	26	37			50	159	153	256	233	248	
	Water flow rate	Cooling	Nom.	l/s	8.2	9.5	11.5	14	15.6	18.8	20.1	23.4	25.2	28.6
	Water pressure drop	Cooling	Nom.	kPa	15.1	12.3	17.1	18.2	22	24.4	31.6	33.7	31	27.7
Air heat exchanger	Type			Microchannel										
Compressor	Type			Driven vapour compression										
	Quantity			1					2					
Fan	Type			Direct propeller										
	Quantity			4		6			10			12		
	Air flow rate	Nom.	l/s	17,448		26,172			42,600			51,324		
	Speed		rpm	760										
Sound power level	Cooling	Nom.	dB(A)	87.67	87.93	90.25	92.27		91.42	91.65	93.25	94.9	95.27	
Sound pressure level	Cooling	Nom.	dB(A)	68.70	69.00	70.80	72.80		71.00	71.30	72.50	74.10	74.5	
Operation range	Air side	Cooling	Min.~Max.	-18~50										
	Water side	Cooling	Min.~Max.	-8~18										
Refrigerant	Type/GWP			R-1234(ze)/7										
	Charge		kg	27.6		41.4			64.2		78		102	
	Circuits	Quantity		1					2					
Piping connections	Evaporator water inlet/outlet (OD)			88.9mm			114.3mm			139.7mm		168.3mm		
Unit	Running current	Cooling	Nom.	A	93.0	114.0	137.0	158.0	191.0	218.0	244.0	281.0	309.0	345.0
		Max		A	132.0	156.0	217.0	236.0	272.0	312.0	348.0	434.0	500.0	522.0
Power supply	Phase/Frequency/Voltage		Hz/V	3~/50/400										

Air cooled screw inverter chiller, high efficiency, standard/low sound

- › High energy efficiency both at full and part load conditions
- › Inverter stepless single-screw compressor with DC electrical motor
- › Advanced compressor technology featuring integrated inverter and variable volume ratio (VVR)
- › HFO R1234zeE Refrigerant with Ozone Depletion Potential equal to zero and extremely low Global Warming Potential
- › Compact design for small footprint and minimized installation space
- › Low operating sound levels are achieved by the latest compressor and fan design
- › One or two truly independent refrigerant circuits for outstanding reliability
- › Continuous fans speed modulation thanks to inverter driven fans to improve part load efficiency



More details and final information can be found by scanning or clicking the QR codes.



EWAH-TZXSB



EWAH-TZXLB

Cooling Only				EWAH-TZXSB/XLB												
				180	220	270	300	350	390	430	480	580	620			
Space cooling	A Condition 35°C Pdc			kW		180.38	224.67	270.66	300.22	355	392	427.64	481.86	574.38	619.88	
	ηs,c			%		188.68	195.84	194.04	203.08	196.16	196.4	203.28	206.2	214.96	217.88	
SEER						4.792	4.971	4.926	5.152	4.979	4.985	5.157	5.23	5.449	5.522	
Cooling capacity	Nom.			kW		180	225	271	300	355	392	428	482	574	620	
Power input	Cooling	Nom.		kW		51.8	66.3	79	89.6	103	114	125	144	164	181	
Capacity control	Method			Variable												
	Minimum capacity			%		33.4	26.7	21.6	18.7	16.7	15.4	14.3	12.5	10.8	10	
EER						3.49	3.39	3.43	3.35	3.44	3.42		3.33	3.5	3.41	
IPLV						6.05	6.09	5.92	6.2	5.8	5.81	5.9	6	6.01	6.2	
Dimensions	Unit	Height	mm		2,540											
		Width	mm		2,282											
		Length	mm		3,230	4,130	3,230	4,130	5,887		6,786	7,684	6,877	7,778		
Weight	Unit	kg		2,447	2,813	2,557	2,923	4,445.2	4,629.2	5,004.6	5,748.6	5,720	6,364.8			
	Operation weight			kg		2,484.35	2,862.5	2,606.5	2,972.5	4,598.2	4,870.2	5,237.6	5,981.6	6,021	6,656.8	
Water heat exchanger	Type			Plate heat exchanger												
	Water volume			l		37	50		153	241	233		301	292		
	Water flow rate	Cooling	Nom.	l/s		8.6	10.7	12.9	14.3	17	18.7	20.4	23	27.4	29.6	
	Water pressure drop	Cooling	Nom.	kPa		10.2	11.2	15.7	18.9	23.2	16.7	34.2	26.3	24.7	31.1	
Air heat exchanger	Type			Microchannel												
Compressor	Type			Driven vapour compressor												
	Quantity			1				2								
Fan	Type			Direct propeller												
	Quantity			6	8	6	8	12		14	16	14	16			
	Air flow rate	Nom.		l/s		26,172	34,896	26,172	34,896	52,344		61,068	69,792	61,068	69,792	
	Speed			rpm		760										
Sound power level (XSB)	Cooling	Nom.		dBA		97.19	98.16	101.14	96.57	100.19	100.4	100.7	101.94	99.44	104.19	
Sound power level (XLB)				dBA		92.14	93.15	96.44	96.57	95.14	95.3	95.68	96.78	99.44	99.57	
Sound pressure level (XSB)	Cooling	Nom.		dBA		77.7	78.20	81.70	76.60	79.40	79.60		80.40	78.70	82.70	
Sound pressure level (XLB)				dBA		72.65	73.19	76.96	76.62	74.36	74.53	74.55	75.29	78.67	78.12	
Operation range	Air side	Cooling	Min.~Max.	°CDB		-18~55										
	Water side	Cooling	Min.~Max.	°CDB		-8~18										
Refrigerant	Type/GWP			R-1234(ze)/7												
	Charge			kg		39	52	39	52	73.2		84.6	97.6	102	116.8	
	Circuits	Quantity		1				2								
Piping connections	Evaporator water inlet/outlet (OD)			88.9mm		114.3mm			139.7mm		168.3mm					
Unit	Running current	Cooling	Nom.	A		88.5	113.05	131.55	147.5	176.4	193.47	208.66	243.65	272.5	298.67	
	Max			A		134	173	190	233	266	286	311	372	403	465	
Power supply	Phase/Frequency/Voltage			Hz/V		3~/50/400										

Air cooled screw inverter chiller, high efficiency, reduced sound

- › High energy efficiency both at full and part load conditions
- › Inverter stepless single-screw compressor with DC electrical motor
- › Advanced compressor technology featuring integrated inverter and variable volume ratio (VVR)
- › HFO R1234zeE Refrigerant with Ozone Depletion Potential equal to zero and extremely low Global Warming Potential
- › Compact design for small footprint and minimized installation space
- › Low operating sound levels are achieved by the latest compressor and fan design
- › One or two truly independent refrigerant circuits for outstanding reliability
- › Continuous fans speed modulation thanks to inverter driven fans to improve part load efficiency



More details and final information can be found by scanning or clicking the QR codes.



Cooling Only				EWAH-TZXR	180	220	270	300	350	390	430	480	580	620
Space cooling	A Condition 35°C Pdc		kW	180.38	224.67	270.66	300.22	354.75	391.7	427.42	481.53	573.98	619.32	
	ηs,c		%	188.68	195.84	194.04	203.08	195.44	195.76	202.72	205.68	213.64	217.16	
SEER				4.792	4.971	4.926	5.152	4.961	4.969	5.143	5.217	5.416	5.504	
Cooling capacity	Nom.		kW	180	225	271	300	355	392	427	482	574	619	
Power input	Cooling	Nom.	kW	51.8	66.3	79	89.6	103	115	125	145	164	182	
	Capacity control	Method		Variable										
	Minimum capacity		%	33.4	26.7	21.6	18.7	16.7	15.4	14.3	12.5	10.8	10	
EER				3.49	3.39	3.43	3.35	3.42	3.41		3.32	3.48	3.39	
IPLV				6.05	6.09	5.92	6.2	5.78	5.77	5.88	5.97	5.98	6.17	
Dimensions	Unit	Height	mm	2,540										
		Width	mm	2,282										
		Length	mm	3,230	4,130	3,230	4,130	5,887		6,786	7,684	6,877	7,778	
Weight	Unit		kg	2,547	2,913	2,717	3,083	4,645.2	4,829.2	5,204.6	5,948.6	6,040	6,684.8	
	Operation weight		kg	2,584.35	2,962.5	2,766.5	3,132.5	4,798.2	5,070.2	5,437.6	6,181.6	6,341	6,976.8	
Water heat exchanger	Type			Plate heat exchanger				Shell and tube						
	Water volume		l	37	50			153	241	233		301	292	
	Water flow rate	Cooling	Nom.	l/s	8.6	10.7	12.9	14.3	16.9	18.7	20.4	23	27.4	29.6
	Water pressure drop	Cooling	Nom.	kPa	10.2	11.2	15.7	18.9	23.2	16.6	34.1	26.3	24.7	31.1
Air heat exchanger	Type			Microchannel										
Compressor	Type			Driven vapour compressor										
	Quantity			1				2						
Fan	Type			Direct propeller										
	Quantity			6	8	6	8	12		14	16	14	16	
	Air flow rate	Nom.	l/s	26,172	34,896	26,172	34,896	51,324		59,709	68,433	59,709	68,433	
	Speed		rpm	760										
Sound power level	Cooling	Nom.	dB(A)	88.63	89.73	92.27	92.6	91.63	91.73	92.25	93.09	95.27	95.6	
Sound pressure level	Cooling	Nom.	dB(A)	69.20	69.80	72.80	72.60	70.90	71.00	71.10	71.6	74.5	74.20	
Operation range	Air side	Cooling	Min.~Max.	-18~55										
	Water side	Cooling	Min.~Max.	-8~18										
Refrigerant	Type/GWP			R-1234(ze)/7										
	Charge		kg	39	52	39	52	73.2		84.6	97.6	102	116.8	
	Circuits	Quantity		1				2						
Piping connections	Evaporator water inlet/outlet (OD)			88.9mm	114.3mm			139.7mm	168.3mm					
Unit	Running current	Cooling	Nom.	A	88.5	113.05	131.55	147.5	176.9	194.09	209.13	244.41	273.41	299.81
		Max		A	134	173	190	233	266	286	311	372	403	465
Power supply	Phase/Frequency/Voltage		Hz/V	3~/50/400										

Air cooled screw inverter chiller, premium efficiency, standard/low sound

- › Premium energy efficiency both at full and part load conditions
- › Inverter stepless single-screw compressor with DC electrical motor
- › Advanced compressor technology featuring integrated inverter and variable volume ratio (VVR)
- › HFO R1234zeE Refrigerant with Ozone Depletion Potential equal to zero and extremely low Global Warming Potential
- › Compact design for small footprint and minimized installation space
- › Low operating sound levels are achieved by the latest compressor and fan design
- › One or two truly independent refrigerant circuits for outstanding reliability
- › Continuous fans speed modulation with EC fans for even higher part load efficiency



EWAH-TZPSB/PLB/PRB

Microtech III

More details and final information can be found by scanning or clicking the QR codes.



EWAH-TZPSB



EWAH-TZPLB

Cooling Only				EWAH-TZPSB/PLB	370	440	530	610
Space cooling	A Condition 35°C Pdc			kW	371.15	435.24	532.06	606.43
	ηs,c			%	206.56	213.68	220.48	224.96
SEER					5.239	5.417	5.587	5.699
Cooling capacity	Nom.			kW	371	435	532	606
Power input	Cooling	Nom.		kW	102	121	137	163
Capacity control	Method				Variable			
	Minimum capacity			%	16.7	14.3	11.7	10
EER					3.62	3.58	3.86	3.7
IPLV					6.15	6.35	6.36	6.35
Dimensions	Unit	Height		mm	2,540			
		Width		mm	2,282			
		Length		mm	7,684	9,480	7,778	8,687
Weight	Unit			kg	5,741.4	6,722	6,364.8	7,140.2
	Operation weight			kg	5,982.4	7,023	6,656.8	7,636.2
Water heat exchanger	Type				Shell and tube			
	Water volume			l	241	301	292	496
	Water flow rate	Cooling	Nom.	l/s	17.7	20.8	25.4	29
	Water pressure drop	Cooling	Nom.	kPa	24.4	15	15.3	18
Air heat exchanger	Type				Microchannel			
Compressor	Type				Driven vapour compression			
	Quantity				2			
Fan	Type				Direct propeller			
	Quantity				16	20	16	18
	Air flow rate	Nom.		l/s	251,251.0	314,064	251,251.0	282,658.0
	Speed			rpm	760			
Sound power level (PSB)	Cooling	Nom.		dBA	100.3	100.8	103.24	104.21
Sound power level (PLB)	Cooling	Nom.		dBA	95.48	96	98.71	99.63
Sound pressure level (PSB)	Cooling	Nom.		dBA	78.80		81.80	82.40
Sound pressure level (PLB)	Cooling	Nom.		dBA	74.03	73.96	77.25	77.86
Operation range	Air side	Cooling	Min.-Max.	°CDB	-18~-55			
	Water side	Cooling	Min.-Max.	°CDB	-8~-18			
Refrigerant	Type/GWP				R-1234(ze)/7			
	Circuits	Quantity			2			
Refrigerant circuit	Charge			kg	90.4	113	116.8	131.2
Refrigerant charge	Per circuit			kg	316.4	395.5	408.8	459.2
Piping connections	Evaporator water inlet/outlet (OD)				168.3mm			219.1mm
Unit	Running current	Cooling	Nom.	A	175.85	205.4	233.82	272.98
		Max		A	272	319	350	424
Power supply	Phase/Frequency/Voltage			Hz/V	3~/50/400			

Air cooled screw inverter chiller, premium efficiency, reduced sound

- › Premium energy efficiency both at full and part load conditions
- › Inverter stepless single-screw compressor with DC electrical motor
- › Advanced compressor technology featuring integrated inverter and variable volume ratio (VVR)
- › HFO R1234zeE Refrigerant with Ozone Depletion Potential equal to zero and extremely low Global Warming Potential
- › Compact design for small footprint and minimized installation space
- › Low operating sound levels are achieved by the latest compressor and fan design
- › One or two truly independent refrigerant circuits for outstanding reliability
- › Continuous fans speed modulation with EC fans for even higher part load efficiency



More details and final information can be found by scanning or clicking the QR codes.



EWAH-TZPRB

Cooling Only		EWAH-TZPRB		370	440	530	610	
Space cooling	A Condition 35°C Pdc		kW	370.96	435.06	531.76	606.09	
	ηs,c		%	206.04	213.28	219.28	223.8	
SEER				5.226	5.407	5.557	5.67	
Cooling capacity	Nom.		kW	371	435	532	606	
Power input	Cooling	Nom.	kW	102	122	138	164	
	Capacity control	Method		Variable				
	Minimum capacity		%	16.7	14.3	11.7	10	
EER				3.61	3.57	3.84	3.69	
IPLV				6.12		6.32		
Dimensions	Unit	Height	mm	2,540				
		Width	mm	2,282				
		Length	mm	7,684	9,480	7,778	8,687	
Weight	Unit		kg	5,941.4	6,922	6,684.8	7,460.2	
	Operation weight		kg	6,182.4	7,223	6,976.8	7,956.2	
Water heat exchanger	Type			Shell and tube				
	Water volume		l	241	301	292	496	
	Water flow rate	Cooling	Nom.	l/s	17.7	20.8	25.4	28.9
	Water pressure drop	Cooling	Nom.	kPa	24.4	14.9	15.3	18
Air heat exchanger	Type			Microchannel				
Compressor	Type			Driven vapour compression				
	Quantity			2				
Fan	Type			Direct propeller				
	Quantity			16	20	16	18	
	Air flow rate	Nom.	l/s	246,359.0	307,948.0	246,359.0	276,541.0	
	Speed		rpm	760				
Sound power level	Cooling	Nom.	dBA	92.37	92.94	94.94	95.73	
Sound pressure level	Cooling	Nom.	dBA	70.90		73.50	74.00	
Operation range	Air side	Cooling	Min.-Max.	-18~-55				
	Water side	Cooling	Min.-Max.	-8~-18				
Refrigerant	Type/GWP			R-1234(ze)/7				
	Circuits	Quantity		2				
Refrigerant circuit	Charge		kg	90.4	113	116.8	131.2	
Refrigerant charge	Per circuit		kg	316.4	395.5	408.8	459.2	
Piping connections	Evaporator water inlet/outlet (OD)			168.3mm			219.1mm	
Unit	Running current	Cooling	Nom.	A	176.22	205.83	234.54	273.8
		Max		A	272	319	350	424
Power supply	Phase/Frequency/Voltage		Hz/V	3~/50/400				



Air cooled screw inverter chiller, standard efficiency, standard/low sound

- › Optimized energy efficiency both at full and part load conditions
- › New single screw compressor geometry allowing performance optimization
- › Refrigerant cooled inverter mounted on compressor all across the range
- › New generation of air-cooled inverter series with extension of capacity range: Nominal capacity up to 1,600 kW
- › Includes new generation Daikin MicroTech 4 controller with higher memory capacity and faster microprocessor
- › Microchannel coils



More details and final information can be found by scanning or clicking the QR codes.



EWAD-TZSSC2



EWAD-TZSLC2

Cooling Only				EWAD-TZSSC2/SLC2							H11	H12	H13	C15	C16	H17	H18	H19	
Space cooling	A Condition 35°C Pdc			kW	1,189	1,259	1,355	1,508	1,644	1,766	1,875	1,965							
	ηs,c			%	184.5	182.4	182.9	190.1	191.8	191.4	190.1	184.2							
SEER					4.69	4.64	4.65	4.83	4.87	4.86	4.83	4.68							
Cooling capacity	Nom.			kW	1,189	1,259	1,355	1,508	1,644	1,766	1,875	1,965							
Power input	Cooling	Nom.		kW	380.9	413.4	438.6	485	532.8	581.8	636.4	709.3							
Capacity control	Method			Variable															
	Minimum capacity			%	12.5														
EER					3.12	3.05	3.09	3.11	3.09	3.04	2.95	2.77							
IPLV					4.85	4.8	4.78	5.14	5.11	5.07	5.04	4.99							
Dimensions	Unit	Height		mm	2,540														
		Width		mm	2,282														
		Length		mm	10,510	11,404			12,302	13,202	14,102								
Weight	Unit			kg	9,322	10,112		10,716	11,134	11,564	12,037								
		Operation weight		kg	9,879	11,123		11,727	12,145	12,575	13,048								
Water heat exchanger	Type			Shell and tube															
	Water volume			l	557				1,011										
	Water	Cooling	Nom.	kPa	57.1	63.3	40.5	49.1	57.4	65.2	72.7	79							
Air heat exchanger	Type			Microchannel															
Compressor	Type			Inverter driven single screw compressor															
	Quantity			2															
Fan	Type			Direct propeller															
	Quantity			22		24		26		28		30							
	Air flow rate	Nom.		l/s	112,259		122,464		132,670		142,876		153,081						
	Speed			rpm	900														
Sound power level (SSC2)	Cooling	Nom.		dBA	100		101		102		103								
Sound power level (SLC2)	Cooling	Nom.		dBA	102	103	104		105		106	107							
Sound pressure level (SSC2)	Cooling	Nom.		dBA	77	78		79		80									
Sound pressure level (SLC2)	Cooling	Nom.		dBA	80	81	82	81	82	83	84								
Refrigerant	Type/GWP			R-134a/1,430															
	Charge			kg	175		200		220	250	270								
	Circuits	Quantity		2															
Piping connections	Evaporator water inlet/outlet (OD)			219.1mm				273mm											
Unit	Running current	Cooling	Nom.	A	646.5	691.1	733.0	813.9	884.0	962.8	1,044	1,149							
		Max		A	913	969	1,027	1,165	1,205	1,301	1,398	1,487							
Power supply	Phase/Frequency/Voltage			Hz/V	3~/50 /400														

performances according to CSS software 10.27



Air cooled screw inverter chiller, standard efficiency, reduced sound

- › High energy efficiency both at full and part load conditions
- › New single screw compressor geometry allowing performance optimization
- › Refrigerant cooled inverter mounted on compressor all across the range
- › New generation of air-cooled inverter series with extension of capacity range: Nominal capacity up to 1,600 kW
- › Includes new generation Daikin MicroTech 4 controller with higher memory capacity and faster microprocessor
- › Microchannel coils



More details and final information can be found by scanning or clicking the QR codes.



EWAD-TZSRC2

Cooling Only			EWAD-TZSRC2	H11	H12	H13	C15	C16	H17	H18	H19	
Space cooling	A Condition 35°C Pdc		kW	1,164	1,229	1,323	1,463	1,595	1,712	1,812	1,876	
	ηs,c		%	206.8	201.6	203.1	204.1	205.3	205.0		201.4	
SEER				5.24	5.12	5.15	5.18	5.21	5.20		5.11	
Cooling capacity	Nom.		kW	1,164	1,229	1,323	1,463	1,595	1,712	1,812	1,876	
Power input	Cooling	Nom.	kW	384.6	423.1	446	513.9	564.5	611.2	663.5	741.2	
Capacity control	Method			Variable								
	Minimum capacity		%	12.5								
EER				3.03	2.91	2.97	2.85	2.83	2.80	2.73	2.53	
IPLV				5.43	5.29	5.34	5.53		5.5	5.51	5.36	
Dimensions	Unit	Height	mm	2,540								
		Width	mm	2,282								
		Length	mm	10,510		11,404		12,302		13,202		14,102
Weight	Unit		kg	9,322		10,112		10,716		11,564		12,037
	Operation weight		kg	9,879		11,123		11,727		12,145		12,575
Water heat exchanger	Type			Shell and tube								
	Water volume		l	557		1,011						
	Water pressure drop	Cooling	Nom.	kPa	54	60.6	38.8	46.5	54.3	61.6	68.3	72.7
Air heat exchanger	Type			Microchannel								
Compressor	Type			Inverter driven single screw compressor								
	Quantity			2								
Fan	Type			Direct propeller								
	Quantity			22		24		26		28		30
	Air flow rate	Nom.	l/s	81,518		89,145		96,375		104,002		111,232
	Speed		rpm	700								
Sound power level	Cooling	Nom.	dBA	93		94		95		96		
Sound pressure level	Cooling	Nom.	dBA	70		71		72		73		
Refrigerant	Type/GWP			R-134a/1,430								
	Charge		kg	175		200		220		250		270
	Circuits	Quantity		2								
Piping connections	Evaporator water inlet/outlet (OD)			219.1mm				273mm				
Unit	Running current	Cooling	Nom.	A	659.2	708.5	748.1	853.7	922.8	1,000	1,080	1,194
		Max		A	913	969	1,027	1,165	1,205	1,301	1,398	1,487
Power supply	Phase/Frequency/Voltage		Hz/V	3~/50 /400								

performances according to CSS software 10.27



Air cooled screw inverter chiller, high efficiency, standard sound

- › High energy efficiency both at full and part load conditions
- › New single screw compressor geometry allowing performance optimization
- › Refrigerant cooled inverter mounted on compressor all across the range
- › New generation of air-cooled inverter series with extension of capacity range: Nominal capacity up to 1,600 kW
- › Includes new generation Daikin MicroTech 4 controller with higher memory capacity and faster microprocessor
- › Microchannel coils



More details and final information can be found by scanning or clicking the QR codes.



EWAD-TZXSC2

Cooling Only				EWAD-TZXSC2	C11	C12	H12	C14	C15	H16	H17
Space cooling	A Condition 35°C Pdc		kW	1,124.00	1,280	1,206	1,399	1,539	1,667	1,780	
	ηs,c		%	211.5	210.8	211.1	211.9	212.6	214.2	212.6	
SEER				5.36	5.35		5.37	5.39	5.43	5.39	
Cooling capacity	Nom.		kW	1,124	1,280	1,206	1,399	1,539	1,667	1,780	
Power input	Cooling	Nom.	kW	354	401.6	375.9	431.7	478.8	524.7	575.4	
Capacity control	Method			Variable							
	Minimum capacity		%	12.5							
EER				3.17	3.19	3.21	3.24	3.22	3.18	3.09	
IPLV				5.54		5.58	5.79	5.7	5.66	5.65	
Dimensions	Unit	Height	mm	2,540							
		Width	mm	2,282							
		Length	mm	10,510	12,302	11,402	12,302	13,202	14,104		
Weight	Unit		kg	9,322	10,515	10,112	10,716	11,134	11,564	12,037	
		Operation weight	kg	9,879	11,526	11,123	11,727	12,145	12,575	13,048	
Water heat exchanger	Type			Shell and tube							
	Water volume		l	557	1,011						
	Water pressure drop	Cooling	Nom.	kPa	51.6	36.6	32.8	42.9	50.9	58.8	66.1
Air heat exchanger	Type			Microchannel							
Compressor	Type			Inverter driven single screw compressor							
	Quantity			2							
Fan	Type			Direct propeller							
	Quantity			22	26	24	26	28	30		
	Air flow rate Nom.		l/s	83,897	99,151	91,524	122,464	132,670	142,876	153,081	
	Speed		rpm	700							
				900							
Sound power level	Cooling	Nom.	dB(A)	95	97	96	101	102			
Sound pressure level	Cooling	Nom.	dB(A)	73	74	73	78	79			
Refrigerant	Type/GWP			R-134a/1,430							
	Charge		kg	175	220	200	220	250	270		
	Circuits	Quantity		2							
Piping connections	Evaporator water inlet/outlet (OD)			219.1mm			273mm				
Unit	Starting current	Max	A	0.0							
	Running current	Cooling	Nom.	A	608.8	686.1	647.1	735.8	806.6	874.7	957.5
		Max	A	918	994	939	1,085	1,124	1,218	1,313	
Power supply	Phase/Frequency/Voltage		Hz/V	3~/50 /400							

performances according to CSS software 10.27



Air cooled screw inverter chiller, high efficiency, reduced sound

- › High energy efficiency both at full and part load conditions
- › New single screw compressor geometry allowing performance optimization
- › Refrigerant cooled inverter mounted on compressor all across the range
- › New generation of air-cooled inverter series with extension of capacity range: Nominal capacity up to 1,600 kW
- › Includes new generation Daikin MicroTech 4 controller with higher memory capacity and faster microprocessor
- › Microchannel coils



More details and final information can be found by scanning or clicking the QR codes.



EWAD-TZXRC2

Cooling Only			EWAD-TZXRC2	C11	C12	H12	C14	C15	H16	H17	
Space cooling	A Condition 35°C Pdc		kW	1,122	1,204	1,279	1,362	1,499	1,625	1,735	
	ηs,c		%	208.8	210.2	209.8	207.8	209.4	209.3	209.7	
SEER				5.30	5.33	5.32	5.27	5.31		5.32	
Cooling capacity	Nom.		kW	1,122	1,204	1,279	1,362	1,499	1,625	1,735	
Power input	Cooling	Nom.	kW	356.3	377.3	403	450.1	501.4	547.6	598.6	
Capacity control	Method			Variable							
	Minimum capacity		%	12.5							
EER				3.15	3.19	3.17	3.03	2.99	2.97	2.90	
IPLV				5.51	5.55	5.49	5.64	5.65	5.64	5.6	
Dimensions	Unit	Height	mm	2,540							
		Width	mm	2,282							
		Length	mm	10,510	11,402	12,302	11,402	12,302	13,202	14,104	
Weight	Unit		kg	9,322	10,112	10,515	10,716	11,134	11,564	12,037	
		Operation weight	kg	9,879	11,123	11,526	11,727	12,145	12,575	13,048	
Water heat exchanger	Type			Shell and tube							
	Water volume		l	557	1,011						
	Water pressure drop	Cooling	Nom.	kPa	51.4	32.7	36.5	40.8	48.5	56.1	63.2
Air heat exchanger	Type			Microchannel							
Compressor	Type			Inverter driven single screw compressor							
	Quantity			2							
Fan	Type			Direct propeller							
	Quantity			22	24	26	24	26	28	30	
	Air flow rate	Nom.	l/s	81,518	89,145	96,375	89,145	96,375	104,002	111,232	
	Speed		rpm	700							
Sound power level	Cooling	Nom.	dB(A)	92	93	94	93	94	95		
Sound pressure level	Cooling	Nom.	dB(A)	70		71				72	
Refrigerant	Type/GWP			R-134a/1,430							
	Charge		kg	175	200	220	200	220	250	270	
	Circuits	Quantity		2							
Piping connections	Evaporator water inlet/outlet (OD)			219.1mm	273mm	219.1mm	273mm				
Unit	Starting current	Max	A	0.0							
	Running current	Cooling	Nom.	A	612.3	651.0	689.6	762.5	834.0	901.3	982.6
		Max	A	918	939	994	1,085	1,124	1,218	1,313	
Power supply	Phase/Frequency/Voltage		Hz/V	3~/50 /400							

performances according to CSS software 10.27



Air cooled screw inverter chiller, standard efficiency, standard/low sound

- › Optimized energy efficiency both at full and part load conditions
- › New single screw compressor geometry allowing performance optimization
- › HFO R-1234ze(E) Refrigerant with Ozone Depletion Potential equal to zero and extremely low Global Warming Potential
- › Refrigerant cooled inverter mounted on compressor all across the range
- › New generation of air-cooled inverter series with extension of capacity range: Nominal capacity up to 1,600 kW
- › Includes new generation Daikin MicroTech 4 controller with higher memory capacity and faster microprocessor
- › Microchannel coils



More details and final information can be found by scanning or clicking the QR codes.



EWAH-TZSSC2



EWAH-TZSLC2

Cooling Only				EWAH-TZSSC2/SLC2													
				710	770	880	940	990	H10	C11	C12	C13	C14	C15	C16		
Space cooling	A Condition 35°C Pdc			kW	712.28	765.6	879.39	942.78	990.5	1,055.51	1,117.22	1,230.93	1,301.55	1,431.96	1,518.61	1,603.34	
	ηs,c			%	181.52	183.08	182.16	181.72	182.84	181.4	182.24	179.28	193.88	192.32	190.76	188.92	
SEER					4.613	4.652	4.629	4.618	4.646	4.61	4.631	4.557	4.922	4.883	4.844	4.798	
Cooling capacity	Nom.			kW	712.3	765.6	879.4	942.8	990.5	1,056	1,117	1,231	1,302	1,432	1,519	1,603	
Power input	Cooling	Nom.		kW	230.7	246.6	284.9	303.9	318.9	339.4	357.4	396	418.4	465.3	510.4	567.4	
Capacity control	Method			Inverter controlled													
	Minimum capacity			%	12.5												
EER					3.088	3.104	3.087	3.102	3.107	3.11	3.126	3.109	3.111	3.077	2.975	2.826	
IPLV					4.79	4.85	4.8	4.74	4.78	4.71	4.73	4.63	5.17	5.08	5.07	4.98	
Dimensions	Unit				2,540												
	Height			mm	2,280												
	Width			mm	6,909												
Weight	Unit			kg	7,033	7,660	8,093	8,900	9,288	10,073	10,475	10,716	11,134	11,564	12,037		
	Operation weight			kg	7,313	8,152	8,585	9,483	9,871	11,116	11,518	11,727	12,145	12,575	13,048		
	Type			Shell and tube													
Water heat exchanger	Water volume			l	280		492		583		1,043		1,011				
	Water flow rate	Cooling	Nom.	l/s	33.97	36.51	41.94	44.96	47.24	50.34	53.27	58.70	62.06	68.28	72.41	76.45	
	Water pressure drop	Cooling	Nom.	kPa	44.6	50.8	59.7	67.7	59.9	67.2	44.3	52.7	38.7	45.9	51	56.3	
Air heat exchanger	Type			Microchannel													
Compressor	Type			Inverter driven single screw compressor													
	Quantity			2													
Fan	Type			Direct propeller, on/off fans													
	Quantity			14	16	18	20	22	24	26	24	26	28	30			
	Air flow rate	Nom.		l/s	71,438	81,644	91,849	102,054	112,259	122,464	132,670	122,464	132,670	142,876	153,081		
	Speed			rpm	900												
Sound power level (SSC2)	Cooling	Nom.		dB(A)	98	99	100	101		102	103	102		103	104		
Sound power level (SLC2)	Cooling	Nom.		dB(A)	101	102	103	104	105	106	107	105	106	107	108		
Sound pressure level (SSC2)	Cooling	Nom.		dB(A)	77		78		79		80	79		80			
Sound pressure level (SLC2)	Cooling	Nom.		dB(A)	80		81	82	83		84	83		84	85		
Refrigerant	Type/GWP			R-1234(ze)/7													
	Charge			kg	120	130	141	150	175	200	220	200	220	250	270		
	Circuits			Quantity	2												
Piping connections	Evaporator water inlet/outlet (OD)			168.3mm	219.1mm				273mm								
Unit	Starting current			A	0												
	Running current	Cooling	Nom.	A	408.6	433.3	493.5	521.5	549.9	579.6	612.7	668.8	718.8	780.9	848.9	934.8	
		Max		A	609.0	640.0	717.0	763.0	811.0	869.0	924.0	1,032.0	1,029.0	1,119.0	1,198.0	1,226.0	
Power supply	Phase/Frequency/Voltage			Hz/V	3~/50/400												

performances according to CSS software 10.27



Air cooled screw inverter chiller, standard efficiency, reduced sound

- › Optimized energy efficiency both at full and part load conditions
- › New single screw compressor geometry allowing performance optimization
- › HFO R-1234ze(E) Refrigerant with Ozone Depletion Potential equal to zero and extremely low Global Warming Potential
- › Refrigerant cooled inverter mounted on compressor all across the range
- › New generation of air-cooled inverter series with extension of capacity range: Nominal capacity up to 1,600 kW
- › Includes new generation Daikin MicroTech 4 controller with higher memory capacity and faster microprocessor
- › Microchannel coils



More details and final information can be found by scanning or clicking the QR codes.



EWAH-TZSRC2

Cooling Only				EWAH-TZSRC2														
				710	770	880	940	990	H10	C11	C12	C13	C14	C15	C16			
Space cooling	A Condition 35°C Pdc			kW														
	ηs,c			%														
SEER				5.194	5.141	5.142	5.179	5.322	5.256	5.334	5.252	5.489	5.418	5.424	5.404			
Cooling capacity	Nom.			kW														
Power input	Cooling	Nom.		kW														
Capacity control	Method			Inverter controlled														
	Minimum capacity			%														
EER				3.001	2.962	2.955	2.983	3.044	3.038	3.094	3.038	3.002	2.918	2.829	2.671			
IPLV				5.43	5.4	5.36	5.37	5.52	5.46	5.49	5.35	5.79	5.73	5.71				
Dimensions	Unit	Height	mm	2,540														
		Width	mm	2,280														
		Length	mm	6,909	7,809	8,709	9,602	10,510	11,402	12,302	11,402	12,302	13,202	14,102				
Weight	Unit	Operation weight		kg														
				7,313	8,152	8,585	9,483	9,871	11,116	11,518	11,727	12,145	12,575	13,048				
Water heat exchanger	Type			Shell and tube														
	Water volume			280			492			583			1,043			1,011		
	Water flow rate	Cooling	Nom.	l/s	33.21	35.73	41.00	43.98	46.29	49.32	52.23	57.43	60.72	66.74	70.77	73.99		
	Water pressure drop	Cooling	Nom.	kPa	42.8	48.9	57.3	64	57.8	64.8	42.7	50.7	37.2	44.1	48	53.1		
Air heat exchanger	Type			Microchannel														
Compressor	Type			Inverter driven single screw compressor														
	Quantity			2														
Fan	Type			Direct propeller, on/off fans														
	Quantity			14	16	18	20	22	24	26	24	26	28	30				
	Air flow rate Nom.			l/s														
	Speed			rpm														
Sound power level	Cooling	Nom.		dBA														
Sound pressure level	Cooling	Nom.		dBA														
Refrigerant	Type/GWP			R-1234(ze)/7														
	Charge			kg														
	Circuits			Quantity														
Piping connections	Evaporator water inlet/outlet (OD)			168.3mm			219.1mm			273mm								
Unit	Starting current		Max	A														
	Running current	Cooling	Nom.	A														
		Max		A														
Power supply	Phase/Frequency/Voltage			Hz/V														
				3~/50/400														

performances according to CSS software 10.27



Air cooled screw inverter chiller, high efficiency, standard/low sound

- › High energy efficiency both at full and part load conditions
- › New single screw compressor geometry allowing performance optimization
- › HFO R-1234ze(E) Refrigerant with Ozone Depletion Potential equal to zero and extremely low Global Warming Potential
- › Refrigerant cooled inverter mounted on compressor all across the range
- › New generation of air-cooled inverter series with extension of capacity range: Nominal capacity up to 1,600 kW
- › Includes new generation Daikin MicroTech 4 controller with higher memory capacity and faster microprocessor
- › Microchannel coils



More details and final information can be found by scanning or clicking the QR codes.



EWAH-TZXSC2



EWAH-TXLXC2

Cooling Only				EWAH-TZXSC2/XLC2											
				670	780	840	950	C10	C11	C12	C13	C14	C15		
Space cooling	A Condition 35°C Pdc			kW	669.32	783.42	840.22	947.7	1,014.01	1,119.73	1,236.7	1,347.06	1,442.56	1,526.76	
	ηs,c			%	209.96	211.56	212.8	215.88	216.72	213.16	219.2	218.36	217.48	216.32	
SEER					5.324	5.364	5.395	5.472	5.493	5.404	5.555	5.534	5.512	5.483	
Cooling capacity	Nom.			kW	669.3	783.4	840.2	947.7	1,014	1,120	1,237	1,347	1,443	1,527	
Power input	Cooling		Nom.	kW	206	242	260.2	292.4	310.6	351.7	380.1	420.4	460.7	507.5	
	Capacity control Method				Inverter controlled										
Minimum capacity				%	12.5										
EER					3.249	3.237	3.229	3.241	3.264	3.184	3.253	3.204	3.131	3.009	
IPLV					5.59		5.6	5.64	5.66	5.53	5.86	5.8	5.76	5.7	
Dimensions	Unit	Height	mm	2,540											
		Width	mm	2,280											
		Length	mm	6,909	7,809	8,709	10,510	11,402	12,302	11,402	12,302	13,202	14,102		
Weight	Unit			kg	7,033	7,660	8,093	9,288	10,073	10,475	10,716	11,134	11,564	12,037	
	Operation weight			kg	7,313	8,152	8,585	9,871	11,116	11,518	11,727	12,145	12,575	13,048	
Water heat exchanger	Type			Shell and tube											
	Water volume		l	280	492			583	1,043			1,011			
	Water flow rate	Cooling	Nom.	l/s	31.92	37.36	40.07	45.20	48.35	53.39	58.97	64.23	68.78	72.80	
	Water pressure drop	Cooling	Nom.	kPa	39.9	48.5	54	55.3	37.2	44.5	35.3	41.1	46.5	51.5	
Air heat exchanger	Type			Microchannel											
Compressor	Type			Inverter driven single screw compressor											
	Quantity			2											
Fan	Type			Direct propeller, on/off fans											
	Quantity			14	16	18	22	24	26	24	26	28	30		
	Air flow rate		Nom.	l/s	53,389	61,016	68,643	83,897	91,524	99,151	122,464	132,670	142,876	153,081	
	Speed			rpm	700						900				
Sound power level (XSC2)	Cooling	Nom.	dBA	98	99	100	101	103	105	104	105	106	107		
Sound power level (XLC2)	Cooling	Nom.	dBA	93	95		96	98	99	101	102		103		
Sound pressure level (XSC2)	Cooling	Nom.	dBA	76	78		79	80	82			83		84	
Sound pressure level (XLC2)	Cooling	Nom.	dBA	72	73		74	75	76		79		80		
Refrigerant	Type/GWP			R-1234(ze)/7											
	Charge			kg	120	130	141	175	200	220	200	220	250	270	
	Circuits		Quantity	2											
Piping connections	Evaporator water inlet/outlet (OD)			168.3mm	219.1mm			273mm							
Unit	Starting current		Max	A	0										
	Running current	Cooling	Nom.	A	373.9	431.3	459.1	513.1	544.2	604.8	660.3	717.4	778.2	848.9	
		Max		A	588.0	625.0	693.0	754.0	836.0	936.0	967.0	1,042.0	1,132.0	1,157.0	
Power supply	Phase/Frequency/Voltage			Hz/V	3~/50/400										

performances according to CSS software 10.27



Air cooled screw inverter chiller, high efficiency, reduced sound

- › High energy efficiency both at full and part load conditions
- › New single screw compressor geometry allowing performance optimization
- › HFO R-1234ze(E) Refrigerant with Ozone Depletion Potential equal to zero and extremely low Global Warming Potential
- › Refrigerant cooled inverter mounted on compressor all across the range
- › New generation of air-cooled inverter series with extension of capacity range: Nominal capacity up to 1,600 kW
- › Includes new generation Daikin MicroTech 4 controller with higher memory capacity and faster microprocessor
- › Microchannel coils



More details and final information can be found by scanning or clicking the QR codes.



EWAH-TZXRC2

Cooling Only				EWAH-TZXRC2										
				670	780	840	950	C10	C11	C12	C13	C14	C15	
Space cooling	A Condition 35°C Pdc			kW	669.17	783.17	840	947.47	1,013.69	1,119.41	1,212.9	1,321.24	1,415.52	1,497.21
	ηs,c			%	208.32	211.4	212.68	215.84	216.12	212.64	219.4	220.16	218.84	217.44
SEER					5.283	5.36	5.392	5.471	5.478	5.391	5.56	5.579	5.546	5.511
Cooling capacity	Nom.			kW	669.2	783.2	840	947.5	1,014	1,119	1,213	1,321	1,416	1,497
Power input	Cooling	Nom.		kW	206.2	243.3	261.9	292.6	310.8	351.9	382.2	426	467.4	514.6
Capacity control	Method			Inverter controlled										
	Minimum capacity			%	12.5									
EER					3.246	3.219	3.207	3.238	3.261	3.181	3.174	3.101	3.029	2.91
IPLV					5.58		5.59	5.63	5.65	5.52	5.94	5.86	5.81	5.79
Dimensions	Unit	Height	mm	2,540										
		Width	mm	2,280										
		Length	mm	6,909	7,809	8,709	10,510	11,402	12,302	11,402	12,302	13,202	14,102	
Weight	Unit			kg	7,033	7,660	8,093	9,288	10,073	10,475	10,716	11,134	11,564	12,037
	Operation weight			kg	7,313	8,152	8,585	9,871	11,116	11,518	11,727	12,145	12,575	13,048
Water heat exchanger	Type			Shell and tube										
	Water volume			l	280	492		583	1,043		1,011			
	Water flow rate	Cooling	Nom.	l/s	31.91	37.35	40.06	45.19	48.34	53.38	57.83	63.00	67.49	71.39
Air heat exchanger	Water	Cooling	Nom.	kPa	39.9	48.4	54	55.3	37.2	44.4	34.1	39.7	44	49.7
	pressure drop													
Compressor	Type			Microchannel										
	Type			Inverter driven single screw compressor										
Fan	Quantity			2										
	Type			Direct propeller, on/off fans										
	Quantity				14	16	18	22	24	26	24	26	28	30
Sound power level	Cooling			Nom.	dBA	90	91	92	93	94	95	94	95	96
	Sound pressure level			Nom.	dBA	69	70		71		72		73	
Refrigerant	Type/GWP			R-1234(ze)/7										
	Charge			kg	120	130	141	175	200	220	200	220	250	270
	Circuits			Quantity	2									
Piping connections	Evaporator water inlet/outlet (OD)			168.3mm	219.1mm			273mm						
Unit	Starting current			A	0									
	Running current	Cooling	Nom.	A	374.9	432.6	460.2	514.2	545.4	606.0	670.1	725.0	783.7	853.8
		Max			A	588.0	625.0	693.0	754.0	836.0	936.0	967.0	1,042.0	1,132.0
Power supply	Phase/Frequency/Voltage			Hz/V	3~/50/400									

performances according to CSS software 10.27

Air Cooled Screw Chiller - fix speed

- › Optimised for use with R-134a
- › Large operation range (ambient temperature down to -18°C)
- › Low operating cost and extended operating life thanks to the careful design aimed to optimize the energy efficiency of the chillers and to improve installation profitability, effectiveness and economical management
- › 2 or 3 independent refrigerant circuits for outstanding reliability and maximum safety for maintenance
- › Extremely wide range from 290kW to over 2 MW
- › Units with stepless regulation offer the benefit of following the system energy demand at any time with high efficiency if compared to the units with step regulation. Each unit has infinitely variable capacity control from 100% down to 12.5%
- › Advanced compressor and fans design that operate at very low sound levels
- › MicroTech 4 controller: sophisticated adaptive software logic for stable operating conditions



More details and final information can be found by scanning or clicking the QR codes.



EWAD-T-SSC



EWAD-T-SLC

Cooling Only			EWAD-T-SSC/SLC																																		
Cooling capacity	Nom.		290	330	370	510	520	580	700	800	940	C10	C11	C17	C19	C20	C21	H10	H12	H13	H14	H15	H16	H18													
Power input	Cooling	Nom.	kW																																		
Capacity control	Method		Stepless																																		
	Minimum capacity		%																																		
SEPR			5.14	5.1	5.16	5.5		5.51	5.56	5.51	5.52	5.51	5.51	5.42	5.38	5.51	5.5	5.52	5.5	5.54	5.56	5.5															
EER			3.15	2.94	3.1	3.02	3.07	3.03	3.01	3.03	2.85	2.87	2.88	2.84	2.87	2.8	2.85	2.88	2.92	2.98	2.8																
IPLV			4.31	4.22	4.35	4.9	4.78	5.04	4.63	4.56	4.63	4.65	4.67	4.6	4.5	4.46	4.57	4.64	4.62	4.63	4.64	4.6	4.63														
Dimensions	Unit	Height	mm																																		
		Width	mm																																		
		Length	mm																																		
Weight	Unit		kg																																		
	Operation weight		kg																																		
Water heat exchanger	Type		Shell and tube																																		
	Water volume		l																																		
	Water flow rate	Cooling	Nom.																																		
	Water pressure drop	Cooling	Nom.																																		
Air heat exchanger	Type		Microchannel																																		
	Compressor		Asymm single screw																																		
Fan	Quantity		2					3					2					3																			
	Type		Direct propeller, on/off fans																																		
	Quantity		6	8	10	12	14	16	24	26	28	30	14	16	18	20	22	24																			
	Air flow rate		Nom.																																		
Speed		rpm																																			
Sound power level (SSC)	Cooling	Nom.	98					99					100					103																			
	Cooling	Nom.	78					79					80					79																			
	Cooling	Nom.	94					95					96					97																			
Sound pressure level (SLC)	Cooling	Nom.	74					75					76					77																			
	Cooling	Nom.	74					75					76					77																			
	Cooling	Nom.	74					75					76					77																			
Refrigerant	Type		R-134a																																		
	Charge		kg																																		
	Circuits	Quantity	2					3					2					3																			
Piping connections	Evaporator water inlet/outlet (OD)		114.3					139.7					168.3					219.1					273mm					219.1mm					273mm				
Unit	Starting current	Max	A																																		
		Running current	Cooling	Nom.																																	
		Max	A																																		
Power supply	Phase/Frequency/Voltage		Hz/V																																		

performances according to CSS software 10.27

Air Cooled Screw Chiller - fix speed

- › Optimised for use with R-134a
- › Large operation range (ambient temperature down to -18°C)
- › Low operating cost and extended operating life thanks to the careful design aimed to optimize the energy efficiency of the chillers and to improve installation profitability, effectiveness and economical management
- › 2 or 3 independent refrigerant circuits for outstanding reliability and maximum safety for maintenance
- › Extremely wide range from 290kW to over 2 MW
- › Units with stepless regulation offer the benefit of following the system energy demand at any time with high efficiency if compared to the units with step regulation. Each unit has infinitely variable capacity control from 100% down to 12.5%
- › Advanced compressor and fans design that operate at very low sound levels
- › MicroTech 4 controller: sophisticated adaptive software logic for stable operating conditions



More details and final information can be found by scanning or clicking the QR codes.



EWAD-T-XSC



EWAD-T-XLC

Cooling Only			EWAD-T-XSC/XLC																				
Cooling capacity	Nom.		kW																				
Power input	Cooling	Nom.	kW																				
Capacity control	Method		Stepless																				
	Minimum capacity		%																				
SEPR			5.18	5.52	5.54	5.51	5.51	5.5	5.55	5.52	5.61	5.52	5.56	5.55	5.59	5.57	5.52	5.56	5.58	5.57	5.57	5.58	5.58
EER			3.32	3.29	3.24	3.16	3.09	3.26	3.19	3.01	3.02	3.15	3.02	3.1	3	3.13	3.05	2.96	3.1	3.11	3.12	3.09	3.14
IPLV			4.15	4.34	4.6	4.77	4.46	4.82	4.88	4.97	4.68	4.54	4.76	4.69	4.56	4.62	4.67	4.6	4.65	4.69	4.7	4.6	4.62
Dimensions	Unit	Height	mm																				
		Width	mm																				
		Length	mm																				
Weight	Unit	kg																					
	Operation weight	kg																					
Water heat exchanger	Type		Shell and tube																				
	Water volume		l																				
	Water flow rate	Cooling	Nom.																				
	Water pressure drop	Cooling	Nom.																				
Air heat exchanger	Type		Microchannel																				
	Compressor		Asymm single screw																				
Fan	Quantity		2																				
	Type		Direct propeller, on/off fans																				
	Quantity		8																				
	Air flow rate	Nom.	l/s																				
Sound power level (XSC)	Cooling		Nom.																				
	Sound pressure level (XSC)		dBA																				
	Cooling		Nom.																				
	Sound pressure level (XLC)		dBA																				
Refrigerant	Type		R-134a																				
	Charge		kg																				
	Circuits	Quantity	2																				
	Piping connections		Evaporator water inlet/outlet (OD)																				
Unit	Starting current	Max	A																				
	Running current	Cooling	Nom.																				
	Running current	Max	A																				
Power supply	Phase/Frequency/Voltage		Hz/V																				

performances according to CSS software 10.27

Air Cooled Screw Chiller - fix speed

- › Optimised for use with R-134a
- › Large operation range (ambient temperature down to -18°C)
- › Low operating cost and extended operating life thanks to the careful design aimed to optimize the energy efficiency of the chillers and to improve installation profitability, effectiveness and economical management
- › 2 or 3 independent refrigerant circuits for outstanding reliability and maximum safety for maintenance
- › Extremely wide range from 290kW to over 2 MW
- › Units with stepless regulation offer the benefit of following the system energy demand at any time with high efficiency if compared to the units with step regulation. Each unit has infinitely variable capacity control from 100% down to 12.5%
- › Advanced compressor and fans design that operate at very low sound levels
- › MicroTech 4 controller: sophisticated adaptive software logic for stable operating conditions



More details and final information can be found by scanning or clicking the QR codes.



EWAD-T-XRC

Cooling Only			EWAD-T-XRC																																															
Cooling capacity	Nom.		kW																																															
Power input	Cooling	Nom.	kW																																															
Capacity control	Method		Stepless																																															
	Minimum capacity	%	12.5																																															
SEPR			5.16	5.14	5.51	5.52	5.5	5.5	5.5	5.5	5.5	5.52	5.5	5.52	5.55	5.56	5.5	5.55	5.56	5.53	5.53	5.54	5.55																											
EER			3.19	3.17	3.12	3.04	2.96	3.14	3.07	2.81	2.79	2.95	2.77	2.89	2.93	2.82	2.69	2.92	2.93	2.89	2.87	2.9	2.95																											
IPLV			4.25	4.3	4.93	4.73	4.75	4.97	5.06	4.98	4.53	4.64	4.65	4.63	4.54	4.72	4.66	4.68	4.56	4.65	4.52	4.64	4.61	4.7																										
Dimensions	Unit	Height	mm																																															
		Width	mm																																															
		Length	4,139		5,039				6,009				7,809		9,609		13,209		14,109		8,709		9,609		10,510		11,409		12,309		14,109																			
Weight	Unit	kg	4,344		4,640				5,140		5,678		5,956		5,943		6,616		7,894		12,238		12,432		7,602		7,632		8,260		11,652		12,059		12,047															
		Operation weight	4,514		4,810				5,310		5,848		5,682		6,183		6,916		8,374		13,168		13,467		8,082		8,112		8,710		12,523		12,930		12,977															
Water heat exchanger	Type		Shell and tube																																															
	Water volume	l	134	129	170				164	170	315	232	289	492	522	101	502	481	871	522																														
	Water flow rate	Cooling	Nom.	1/s	16.3	17.6	18.6	19.4	20.4	22.9	25.1	26.1	33.8	37.4	43.5	46.3	58.8	84.9	92.6	94.7	50.7	54.5	62.9	74.1	78.6	89.7																								
	Water pressure drop	Cooling	Nom.	kPa	21.3	27.4	19.1	20.6	22.4	44.1	37.2	35	30.4	35.4	41.1	46	34.8	40.6	42.8	44.7	50.8	57.8	42	32.1	35.7	44.9																								
Air heat exchanger	Type		Microchannel																																															
Compressor	Type		Asymm single screw																																															
	Quantity		2												3			2		3																														
Fan	Type		Direct propeller, on/off fans																																															
	Quantity		8		10				12				16		20		28		30		18		20		22		24		26		30																			
	Air flow rate	Nom.	l/s	29,963		37,275				44,943				59,568		59,213		74,906		105,581		113,250		67,237		74,550		82,219		90,600		98,269		113,250																
	Speed	rpm	700																																															
Sound power level	Cooling	Nom.	89		90				91				92		93		95		92		93		94		95																									
	Sound pressure level	Cooling	Nom.	69				70				71		72		70		71		72		71																												
Refrigerant	Type		R-134a																																															
	Charge	kg	52	54	65	66				72	93.6	124.8	156	218	234	140.4	156	171.6	187	203	234																													
	Circuits	Quantity	2												3			2		3																														
Piping connections	Evaporator water inlet/outlet (OD)		139.7				168.3				219.1		273mm		219.1mm		273mm																																	
Unit	Starting current	Max	A		296				340		361		454		478		583		589		612		642		694		916		929		1,154		1,528		1,616		1,674		1,018		1,038		1,173		1,446		1,453		1,603	
		Running current	Cooling	Nom.	A	182	197	203	216	231	267	274	291	395	439	480	537	657	928	1,037	1,100	555	593	700	828	873	974																							
		Max	A	262	276	297	321	345	371	400	423	519	571	661	719	899	1,273	1,406	1,464	763	828	963	1,122	1,198	1,348																									
Power supply	Phase/Frequency/Voltage	Hz/V	3~/50 /400																																															

performances according to CSS software 10.27





Daikin, world's first company introducing a new generation of air cooled scroll chiller series with refrigerant R-32.

BLUEvolution

R-32

EWAT-B

Multi scroll chiller with R-32 refrigerant

- ✓ Top class efficiency, SEER up to 4.84. Overcoming 2021 Eco-design requirements!
- ✓ Environmental friendly refrigerant → First in the market
- ✓ New R-32 optimized scroll compressors and heat exchangers
- ✓ The Global Warming Potential (GWP) of R-32 refrigerant is 675, which is only one third compared to commonly used refrigerant R-410
- ✓ The low GWP R-32 refrigerant falls into category class A2L in ISO817 and it can be safely used in many applications including chilled water systems
- ✓ As a single component refrigerant, R-32 is also easier to recycle and reuse another environmental plus in its favour
- ✓ Wide capacity range: 80 – 700 kW
- ✓ Microchannel condensing coil, for reduced refrigerant charge
- ✓ Silver and Gold efficiency versions
- ✓ 3 sound configurations
- ✓ Full compatibility with Daikin on Site
- ✓ New Hydronic Kit configurations (single and twin pump, inertial tank, VFD)
- ✓ Single and dual circuit version overlapping between 150 kW and 350 kW
 - > Single circuit units fits 2 or 3 compressors
 - > Dual circuit units fits 4 or 5 or 6 compressors
- ✓ Extensive option lists
- ✓ Fan speed modulation option (VFD)

Extensive options list

Including new options:

- > Partial heat recovery
- > Buffer tank
- > VFD pumps and variable flow control
- > Master/Slave supplied standard
- > Fan Silent Mode





Single-V Layout

- › Slim layout
- › Higher flexibility: new intermediate sound configuration for both Silver and Gold versions

Modular-V Layout:

- › Brand new layout
- › Better part load efficiency (SEER) vs. previous generation:
 - › +4% with standard arrangement
 - › +7% with VFD fan option



Free-cooling options

It's the capability of a system/equipment to cool air or water by taking advantage of the favorable outdoor conditions when ambient temperature is reducing, for example during winter or intermediate season or even during night time operation. Free cooling operation allows to reduce the power consumption generated by traditional mechanical cooling (e.g. Compressors).

The use of the outdoor ambient as a source for cooling is the perfect way to answer to the new "EPBD Directive" (Energy Performance of Buildings Directive):

Free-cooling - Light

Refrigerant migration system allowing to recover up to 25% of normal unit capacity.

Free-cooling - Full

Refrigerant migration system allowing to recover up to 25% of normal unit capacity.

Benefits

- › Glycol free solution
- › No refrigerant pump required
- › No extra footprint vs standard unit
- › No extra pressure drops on water side

Daikin on Site

Fully compatible with Daikin on Site cloud based platform that allows a number of advanced functionalities including:

- › Remote monitoring
- › System optimization
- › Preventive maintenance
- › Remote access with one click via LAN or GSM modem




Connection to Intelligent Chiller Manager

In case of more complex installations Daikin can offer the Intelligent Chiller Manager option, allowing energy optimisation of the system and, when necessary, full customization of the control solutions to the specific installation's needs:

- › High number of units
- › Peripheral controls

Air cooled scroll chiller, standard efficiency, standard/low sound

- › First R-32 air cooled chiller with Scroll compressors in the market
- › Choosing for an R-32 product, reduces the environmental impact with 68% compared to R-410A and leads directly to lower energy consumption thanks to its high energy efficiency
- › One or two truly independent refrigerant circuits for outstanding reliability
- › MicroTech 4 controller with superior control logic and easy interface
- › Low operating cost and extended operating life thanks to the careful design aimed to optimize the energy efficiency of the chillers and to improve installation profitability, effectiveness and economical management
- › Fan speed modulation to ensure precise airflow control and optimized condensing temperature
- › Possible to set up detailed time bands to reduce fan rotation speed and therefore sound emission
- › Thanks to the Dynamic Condensing Pressure Management, the chiller controller adjusts the condensing pressure set-point to minimize the overall chiller power input

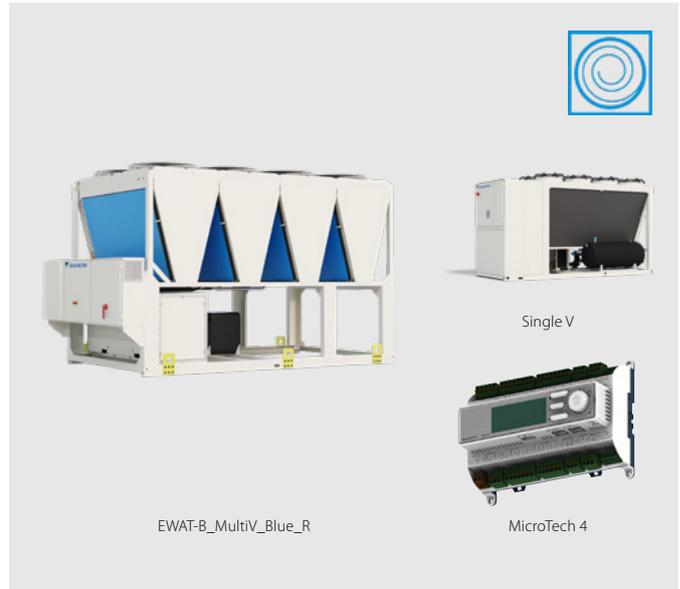

More details and final information can be found by scanning or clicking the QR codes.



EWAT-B-SSB



EWAT-B-SLB



Cooling Only		EWAT-B-SSB/SLB		085	115	135	155	175	195	205	215	240	260	290	310	330	340	350	420	460	510	570	610	670		
Space cooling	A Condition 35°C Pdc	kW		80.92	108.97	131.42	158.15	174.93	191.39	210.53	217.08	241.41	260.58	282.93	306.42	329.59	343.51	350.1	416.28	467.54	513.41	566.53	611.64	667.91		
	ηs,c	%		161	173	161	-	176.2	170.6	173	161	171.8	162.6	173.8	177.8	170.2	174.6	166.6	179.4	179.4	179.4	179.4	179	179		
	ηs,c + VFDFAN	%		-	-	-	-	-	-	-	-	175.4	165.4	177.8	182.6	173.4	183.4	169.4	179.8	182.2	181.8	179.4	180.2	183.8		
SEER			4.1	4.4	4.1	-	4.48	4.34	4.4	4.1	-	4.37	4.14	4.42	4.52	4.33	4.44	4.24	-	4.56	-	-	-	4.55		
SEER + VFDFAN			-	-	-	-	-	-	-	-	-	4.46	4.21	4.52	4.64	4.41	4.66	4.31	4.57	4.63	4.62	4.56	4.58	4.67		
Cooling capacity	Nom.	kW		81	109	131	158	175	191	211	217	241	261	283	306	330	344	350	416	468	513	567	612	668		
Power input	Cooling Nom.	kW		31.8	38.5	49.8	61.9	67.8	69.5	80	85.8	85.2	95.6	108	113	122	117	132	147	171	186	216	230	238		
Capacity control	Method			Step																						
	Minimum capacity	%		50	38	50	25	38	21	19	50	17	25	24	14	13	33	19	17	15	14	12	11	17		
EER			2.55	2.83	2.64	2.55	2.58	2.75	2.63	2.53	2.83	2.73	2.62	2.72	2.71	2.94	2.65	2.84	2.73	2.76	2.63	2.66	2.8			
IPLV			4.65	4.92	4.46	4.68	4.78	4.84	4.86	4.7	4.67	4.44	4.74	4.86	4.63	4.8	4.56	4.87	4.84	4.81	4.89	4.9	4.86			
EER + VFDFAN			-	-	-	-	-	-	-	-	-	2.83	2.73	2.62	2.72	2.7	2.93	2.65	2.83	2.73	2.76	2.62	2.66	2.8		
IPLV + VFDFAN			-	-	-	-	-	-	-	-	-	4.81	4.27	4.55	5.02	4.75	5	4.7	4.91	4.89	4.9	4.93	4.89	5		
Dimensions	Unit	Height	mm	1,801				1,822				1,801				1,822				2,540						
		Width	mm	1,204								2,236														
		Length	mm	2,120	2,660	3,570	3,180	4,170	3,780	2,326				3,226				4,126				5,025	5,874			
Weight (SSB)	Unit	kg		681	767	811	1,007	984	1,166	1,158	1,184	1,712	1,739	1,912	2,186	2,214	2,343	2,242	2,721	2,881	3,037	3,278	3,712	4,073		
	Operation weight	kg		686	773	820	1,014	996	1,177	1,169	1,200	1,723	1,750	1,928	2,205	2,233	2,363	2,261	2,749	2,909	3,065	3,320	3,754	4,115		
Weight (SLB)	Unit	kg		691	777	821	1,028	994	1,187	1,179	1,194	1,815	1,842	2,004	2,289	2,317	2,434	2,345	2,824	3,066	3,223	3,484	3,918	4,279		
	Operation weight	kg		696	783	830	1,035	1,006	1,198	1,190	1,210	1,826	1,853	2,020	2,308	2,336	2,454	2,364	2,852	3,094	3,251	3,526	3,960	4,321		
Water heat exchanger	Type	Brazen plate																								
	Water volume	l		5	6	9	7	12	11	16	11	16	19	20	19	28	42									
	Water flow rate	Cooling	Nom.	l/s		3.9	5.2	6.3	7.6	8.4	9.1	10.1	10.4	11.5	12.4	13.5	14.6	15.7	16.4	16.7	19.9	22.3	24.5	27	29.2	31.9
	Water pressure drop	Cooling	Nom.	kPa		27.3	34.4	26.5	64.2	41.7	45.9	54.4	41.4	69.7	80	66.7	46.4	52.9	77.2	59	54.5	67.2	79.6	65.4	75.1	88
Air heat exchanger	Type	Microchannel																								
Compressor	Type	Scroll compressor																								
	Quantity			2	4	2	4	2	4	2	4	3	4	3	4	5	6									
Fan	Type	Direct propeller																								
	Quantity			4	6	8	10	4	5	6	5	7	8	9	11											
	Air flow rate	Nom.	l/s		6,022	9,036	13,354	12,023	16,710	15,057	20,306	25,382	30,459	25,382	35,535	40,612	45,688	55,841								
	Speed	rpm		1,360				900																		
Sound power level (SSB)	Cooling	Nom.	dBA		84.8	88.2	89.7	87.8	91.8	89.9	90.9	93.2	93.3	93.8	94.8	94.9	95.3	96.1	95.6	96.7	97	97.6	97.8	98.3	99	
Sound power level (SLB)	Cooling	Nom.	dBA		83.7	86.2	87	86.7	88.8	88.1	88.7	90	90.8	91	91.8	91.9	92.7	91.9	93.3	93.4	93.9	94	94.5	95.3		
Sound pressure level (SSB)	Cooling	Nom.	dBA		67.4	70.5	72	69.5	73.8	71.3	72.3	74.8	74.3	74.8	75.8	75.4	75.8	76.6	76.1	76.7	77	77.6	77.9	78.2		
Sound pressure level (SLB)	Cooling	Nom.	dBA		66.3	68.5	69.3	68.4	70.7	69.5	70.1	71.6	71.8	72	72.3	72.4	73.2	72.4	73.3	73.4	74	74.1	74.6			
Refrigerant	Type/GWP	R-32/675																								
	Charge (SSB)	kg		7.1	8.4	12.4	10.7	14.1	14.4	12.7	19	18	18.8	25.5	25	26	25.2	34.3	36.5	40	42	46.1	52.5			
	Charge (SLB)	kg		7.1	8.2	8.4	12.4	10.7	14	13.4	12.7	19	18	19	25.5	26.5	27	24.3	34.3	36.1	39.7	42	45.5	55.5		
	Circuits	Quantity			1	2	1	2	1	2	1	2	1	2	1	2										
Piping connections	Evaporator water inlet/outlet (OD)			76.1	88.9	76.1	88.9	76.1	88.9	76.1	88.9	76.1	88.9	76.1	88.9	76.1	88.9				114.3					
Unit	Starting current	Max	A		213	313	324	284	462	384	395	498	410	420	546	573	583	588	594	636	681	719	763	801	843	
	Running current	Cooling	Nom.	A		59	69	83	108	113	117	131	142	147	160	179	194	206	196	219	238	285	310	358	381	398
		Max	A		73	86	96	143	132	156	167	168	182	193	216	243	254	258	265	307	351	389	433	471	513	
Power supply	Phase/Frequency	Hz		3~/50																						

Air cooled scroll chiller, standard efficiency, reduced sound

- › First R-32 air cooled chiller with Scroll compressors in the market
- › Choosing for an R-32 product, reduces the environmental impact with 68% compared to R-410A and leads directly to lower energy consumption thanks to its high energy efficiency
- › One or two truly independent refrigerant circuits for outstanding reliability
- › MicroTech 4 controller with superior control logic and easy interface
- › Low operating cost and extended operating life thanks to the careful design aimed to optimize the energy efficiency of the chillers and to improve installation profitability, effectiveness and economical management
- › Fan speed modulation to ensure precise airflow control and optimized condensing temperature
- › Possible to set up detailed time bands to reduce fan rotation speed and therefore sound emission
- › Thanks to the Dynamic Condensing Pressure Management, the chiller controller adjusts the condensing pressure set-point to minimize the overall chiller power input



More details and final information can be found by scanning or clicking the QR codes.



Cooling Only		EWAT-B-SRB																				
		085	115	135	155	175	195	205	215	240	260	290	310	330	340	350	420	460	510	570	610	670
Space cooling	A Condition 35°C Pdc	kW																				
	ηs,c	%																				
SEER		4.1 4.4 4.1 4.23 4.13 4.27 4.1 4.57 4.18 4.43 4.38 4.42 4.55 4.2 4.55 5.57 4.56 4.55																				
Cooling capacity	Nom.	kW																				
Power input	Cooling Nom.	kW																				
Capacity control	Method	Step																				
	Minimum capacity	%																				
EER		2.27 2.61 2.34 2.28 2.26 2.48 2.37 2.21 2.6 2.49 2.31 2.44 2.41 2.7 2.35 2.71 2.45 2.48 2.32 2.37 2.55																				
IPLV		4.67 4.97 4.5 4.63 4.74 4.64 4.91 4.66 4.93 4.27 4.51 4.82 4.7 5 4.72 4.81 4.92 4.93 5.04 5.03 5.01																				
Dimensions	Unit	mm																				
	Height	1,801																				
	Width	1,822																				
Weight	Unit	mm																				
	Operation weight	mm																				
	Water heat exchanger	Type	mm																			
Air heat exchanger	Water volume	l																				
	Water flow rate Cooling Nom.	l/s																				
	Water pressure drop	kPa																				
Compressor	Type	Microchannel																				
	Quantity	Scroll compressor																				
Fan	Type	Direct propeller																				
	Quantity	2 4 2 4 2 4 2 4 3 4 3 4 5 6																				
Sound power level	Cooling Nom.	dB(A)																				
	Sound pressure level	dB(A)																				
Refrigerant	Type/GWP	R-32/675																				
	Charge	kg																				
Piping connections	Evaporator water inlet/outlet (OD)	76.1 88.9 76.1 88.9 76.1 88.9 76.1 88.9 76.1 88.9 76.1 88.9 76.1 88.9 76.1 88.9 76.1 88.9 76.1 88.9 76.1 88.9																				
	Unit	Starting current	A																			
Power supply	Running current	A																				
	Phase/Frequency	Hz																				

Air cooled scroll chiller, high efficiency, standard/low sound

- > First R-32 air cooled chiller with Scroll compressors in the market
- > Choosing for an R-32 product, reduces the environmental impact with 68% compared to R-410A and leads directly to lower energy consumption thanks to its high energy efficiency
- > One or two truly independent refrigerant circuits for outstanding reliability
- > MicroTech 4 controller with superior control logic and easy interface
- > Low operating cost and extended operating life thanks to the careful design aimed to optimize the energy efficiency of the chillers and to improve installation profitability, effectiveness and economical management
- > Fan speed modulation to ensure precise airflow control and optimized condensing temperature
- > Possible to set up detailed time bands to reduce fan rotation speed and therefore sound emission
- > Thanks to the Dynamic Condensing Pressure Management, the chiller controller adjusts the condensing pressure set-point to minimize the overall chiller power input



More details and final information can be found by scanning or clicking the QR codes.



EWAT-B-XSB



EWAT-B-XLB

Cooling Only		EWAT-B-XSB/XLB																				
		085	115	145	180	185	200	220	230	250	280	300	310	320	360	370	430	470	540	600	660	700
Space cooling	A Condition 35°C Pdc	kW																				
	ηs,c	%																				
	ηs,c + VFDFAN	%																				
SEER		4.25	4.65	4.45	4.38	4.47	4.4	4.5	4.31	4.47	4.59	4.6	4.5	4.34	4.48	4.56	4.55	4.56	4.61	4.64	4.58	
SEER + VFDFAN		-																				
Cooling capacity	Nom.	kW																				
Power input	Cooling Nom.	kW																				
Capacity control	Method																					
	Minimum capacity	%																				
EER		3.05	3.12	3.23	3.14	2.87	3.06	3.03	3.21	3.12	3.2	3.13	3.313	3.06	3.11	3.06	3.11	3.09	3.07	3.12	3.14	3.1
IPLV		4.83	5	4.82	4.65	4.74	4.67	4.72	4.6	4.69	4.78	4.86	4.77	4.79	4.38	4.7	4.8	4.9	4.8	4.79	4.82	4.77
EER + VFDFAN		-																				
IPLV + VFDFAN		-																				
Dimensions	Unit																					
	Height	mm																				
	Width	mm																				
Weight (XSB)	Unit	kg																				
	Operation weight	kg																				
	Weight (XLB)	Unit	kg																			
Water heat exchanger	Type																					
	Water volume	l																				
	Water flow rate Cooling Nom.	l/s																				
Air heat exchanger	Type																					
	Compressor																					
	Fan																					
Sound power level (XSB)	Cooling Nom.	dBA																				
	Sound power level (XLB)	dBA																				
	Sound pressure level (XSB)	Cooling Nom.	dBA																			
Refrigerant	Type/GWP																					
	Charge (XSB)	kg																				
	Charge (XLB)	kg																				
Piping connections	Evaporator water inlet/outlet (OD)																					
	Unit																					
	Power supply																					

Air cooled scroll chiller, high efficiency, reduced sound

- › First R-32 air cooled chiller with Scroll compressors in the market
- › Choosing for an R-32 product, reduces the environmental impact with 68% compared to R-410A and leads directly to lower energy consumption thanks to its high energy efficiency
- › One or two truly independent refrigerant circuits for outstanding reliability
- › MicroTech 4 controller with superior control logic and easy interface
- › Low operating cost and extended operating life thanks to the careful design aimed to optimize the energy efficiency of the chillers and to improve installation profitability, effectiveness and economical management
- › Fan speed modulation to ensure precise airflow control and optimized condensing temperature
- › Possible to set up detailed time bands to reduce fan rotation speed and therefore sound emission
- › Thanks to the Dynamic Condensing Pressure Management, the chiller controller adjusts the condensing pressure set-point to minimize the overall chiller power input



More details and final information can be found by scanning or clicking the QR codes.



Cooling Only		EWAT-B-XRB																				
		085	115	145	180	185	200	220	230	250	280	300	310	320	360	370	430	470	540	600	660	700
Space cooling	A Condition 35°C Pdc	kW																				
	ηs,c	%																				
SEER																						
Cooling capacity	Nom.	kW																				
Power input	Cooling Nom.	kW																				
Capacity control	Method	Step																				
	Minimum capacity	%																				
EER																						
IPLV																						
Dimensions	Unit	mm																				
	Height	1,801																				
	Width	1,204																				
Weight	Unit	kg																				
	Operation weight	kg																				
	Water heat exchanger	Type	Brazed plate																			
Air heat exchanger	Water volume	l																				
	Water flow rate Cooling Nom.	l/s																				
	Water pressure drop Cooling Nom.	kPa																				
Compressor	Type	Microchannel																				
Fan	Type	Direct propeller																				
	Quantity																					
Sound power level	Cooling Nom.	dB(A)																				
	Sound pressure level Cooling Nom.	dB(A)																				
Refrigerant	Type/GWP	R-32/675																				
	Charge	kg																				
Piping connections	Circuits																					
	Quantity																					
Unit	Evaporator water inlet/outlet (OD)																					
	Starting current Max	A																				
Power supply	Running current Cooling Nom.	A																				
	Phase/Frequency	Hz																				

Air cooled mini inverter heat pump

- › Choosing for an R-32 product, reduces the environmental impact with 68% compared to R-410A and leads directly to lower energy consumption thanks to its high energy efficiency
- › Inverter chiller
- › Hermetically sealed swing inverter compressor
- › New casing for the outdoor units
- › Separate MMI-2 controller for indoor installation



More details and final information can be found by scanning or clicking the QR codes.



Heating & Cooling				EWYA-D	004DV3P	006DV3P	008DV3P
Space heating	Average climate water outlet 35°C	General	SCOP		4.54	4.52	4.61
			Seasonal space heating eff. class			A+++	
Cooling capacity	Nom.		kW	4.86 (1) / 4.52 (2)	5.83 (1) / 5.09 (2)	6.18 (1) / 5.44 (2)	
Heating capacity	Nom.		kW	4.30 (1) / 4.60 (2)	6.00 (1) / 5.90 (2)	7.50 (1) / 7.80 (2)	
Power input	Cooling	Nom.	kW	0.820 (1) / 1.36 (2)	1.08 (1) / 1.55 (2)	1.19 (1) / 1.73 (2)	
	Heating	Nom.	kW	0.840 (1) / 1.26 (2)	1.24 (1) / 1.69 (2)	1.63 (1) / 2.23 (2)	
EER				5.91 (1) / 3.32 (2)	5.40 (1) / 3.28 (2)	5.19 (1) / 3.14 (2)	
COP				5.10 (1) / 3.65 (2)	4.85 (1) / 3.50 (2)	4.60 (1) / 3.50 (2)	
Dimensions	Unit	Height	mm		770		
		Width	mm		1,250		
		Depth	mm		362		
Weight	Unit		kg		88.0		
Water heat exchanger	Type				Plate heat exchanger		
	Water volume		l		1		
Compressor	Type				Hermetically sealed swing compressor		
	Quantity				1		
Fan	Type				Propeller fan		
	Quantity				1		
Sound power level	Cooling	Nom.	dBA	61.0 (1)		62.0 (1)	
	Heating	Nom.	dBA	58.0 (1)	60.0 (1)		62.0 (1)
Sound pressure level	Cooling	Nom.	dBA	48.0 (1)	49.0 (1)		50.0 (1)
	Heating	Nom.	dBA	44.0 (1)	47.0 (1)		49.0 (1)
Operation range	Air side	Cooling	Min.~Max.	°CDB	10 (3)~43		
		Heating	Min.~Max.	°CDB	-25 ~25		
	Water side	Cooling	Min.~Max.	°CDB	5 (3)~22		
		Heating	Min.~Max.	°CDB	9 (3)~65 (3)		
Refrigerant	Type/GWP			R-32/675.0			
	Charge		kg	1.35			
Power supply	Phase/Frequency/Voltage		Hz/V	1~/50 /230 +/-10%			

(1)Condition 1: cooling Ta 35°C - LWE 18°C (DT = 5°C); heating Ta DB/WB 7°C/6°C - LWC 35°C (DT = 5°C) | (2)Condition 2: cooling Ta 35°C - LWE 7°C (DT = 5°C); heating Ta DB/WB 7°C/6°C - LWC 45°C (DT = 5°C) | (3)For more details, see operation range drawing

Air cooled mini inverter heat pump

- › Choosing for an R-32 product, reduces the environmental impact with 68% compared to R-410A and leads directly to lower energy consumption thanks to its high energy efficiency
- › Inverter chiller
- › Hermetically sealed swing inverter compressor
- › New casing for the outdoor units
- › Separate MMI-2 controller for indoor installation



More details and final information can be found by scanning or clicking the QR codes.



EWYA-DV3P

Heating & Cooling				EWYA-D	009DV3P	011DV3P	014DV3P	016DV3P
Space cooling	A Condition 35°C Pdc			kW	9.35	11.6	12.8	14.0
	ηs,c			%	222	229	226	221
SEER					5.62 (6)	5.79 (6)	5.71 (6)	5.59 (6)
Space heating	Average climate water outlet 35°C	General	SCOP Seasonal space heating eff. class		4.82	4.73	4.70	4.69
				A+++				
Cooling capacity	Nom.			kW	9.35 (2) / 9.10 (3)	11.6 (2) / 11.5 (3)	12.8 (2) / 12.7 (3)	14.0 (2) / 15.3 (3)
Heating capacity	Nom.			kW	9.37 (4) / 9.00 (5)	10.6 (4) / 9.82 (5)	12.0 (4) / 12.5 (5)	16.0 (4) / 16.0 (5)
Power input	Cooling	Nom.		kW	2.79 (2) / 1.71 (3)	3.56 (2) / 2.17 (3)	4.06 (2) / 2.51 (3)	4.58 (2) / 3.24 (3)
	Heating	Nom.		kW	1.91 (4) / 2.43 (5)	2.18 (4) / 2.68 (5)	2.46 (4) / 3.42 (5)	3.53 (4) / 4.56 (5)
Capacity control	Method			Variable (inverter)				
EER					3.35 (2) / 5.34 (3)	3.26 (2) / 5.31 (3)	3.16 (2) / 5.04 (3)	3.06 (2) / 4.74 (3)
COP					4.91 (4) / 3.71 (5)	4.83 (4) / 3.66 (5)	4.87 (4) / 3.64 (5)	4.53 (4) / 3.51 (5)
Dimensions	Unit	Height		mm	870			
		Width		mm	1,380			
		Depth		mm	460			
Weight	Unit			kg	147			
Water heat exchanger	Type			Plate heat exchanger				
	Water volume			l	2			
Air heat exchanger	Type			High efficiency fin and tube type with integral subcooler				
Compressor	Type			Hermetically sealed swing inverter compressor				
	Quantity			1				
Fan	Type			Propeller fan				
	Quantity			1				
Air flow rate	Cooling	Nom.		m ³ /min	63	70	85	
		Heating		Nom.	m ³ /min	48.0	55.8	70.4
Sound power level	Cooling	Nom.		dBA	65.5	67.0	69.0	
Sound pressure level	Cooling	Nom.		dBA	44.0	47.7	50.8	51.0
Operation range	Air side	Cooling	Min.~Max.	°CDB	10 ~43			
		Heating	Min.~Max.	°CDB	-25 ~25			
	Water side	Cooling	Min.~Max.	°CDB	5 ~22			
		Heating	Min.~Max.	°CDB	9 (1)~60 (1)			
Refrigerant	Type/GWP			R-32/675.0				
	Control			Electronic expansion valve				
	Circuits	Quantity		1				
Refrigerant charge	Per circuit			kg	3.80			
				TCO ₂ Eq	2.6			
Unit	Running current	Max		A	30.8			
Power supply	Phase/Frequency/Voltage			Hz/V	1~/50 /230			

(1)For more details, see operation range drawing | (2)Cooling: EW 12°C; LW 7°C; ambient conditions: 35°CDB | (3)Cooling: EW 23°C; LW 18°C; ambient conditions: 35°CDB | (4)Condition: Ta DB/WB 7°C/6°C - LWC 35°C (DT = 5°C) | (5)Condition: Ta DB/WB 7°C/6°C - LWC 45°C (Dt=5°C) | (6)According to EN14825 | Depends on operation mode, refer to installation manual.

Air cooled mini inverter heat pump

- › Choosing for an R-32 product, reduces the environmental impact with 68% compared to R-410A and leads directly to lower energy consumption thanks to its high energy efficiency
- › Inverter chiller
- › Daikin swing compressor
- › New casing for the outdoor units
- › Separate MMI-2 controller for indoor installation



More details and final information can be found by scanning or clicking the QR codes.



Heating & Cooling		EWYA-D		009DW1P		011DW1P		014DW1P		016DW1P		
Space cooling	A Condition 35°C Pdc	kW		9.35		11.6		12.8		14.0		
	ηs,c	%		222		229		226		221		
SEER				5.62		5.79		5.71		5.59		
Space heating	Average climate water outlet 35°C	General	SCOP	4.82		4.73		4.70		4.69		
				Seasonal space heating eff. class		A+++						
Cooling capacity	Nom.	kW		9.35 (1) / 9.10 (2)		11.6 (1) / 11.5 (2)		12.8 (1) / 12.7 (2)		14.0 (1) / 15.3 (2)		
Heating capacity	Nom.	kW		9.37 (3) / 9.00 (4)		10.6 (3) / 9.82 (4)		12.0 (3) / 12.5 (4)		16.0 (3) / 16.0 (4)		
Power input	Cooling	Nom.	kW		2.79 (1) / 1.71 (2)		3.56 (1) / 2.17 (2)		4.06 (1) / 2.51 (2)		4.58 (1) / 3.24 (2)	
	Heating		kW		1.91 (3) / 2.43 (4)		2.18 (3) / 2.68 (4)		2.46 (3) / 3.42 (4)		3.53 (3) / 4.56 (4)	
Capacity control	Method		Variable (inverter)									
EER			3.35 (1) / 5.34 (2)		3.26 (1) / 5.31 (2)		3.16 (1) / 5.04 (2)		3.06 (1) / 4.74 (2)			
COP			4.91 (3) / 3.71 (4)		4.83 (3) / 3.66 (4)		4.87 (3) / 3.64 (4)		4.53 (3) / 3.51 (4)			
Dimensions	Unit	Height	mm		870							
		Width	mm		1,380							
		Length	mm		460							
Weight	Unit	kg		147								
Water heat exchanger	Type	Plate heat exchanger										
	Water volume	l		2								
Air heat exchanger	Type	High efficiency fin and tube type with integral subcooler										
Compressor	Type	Hermetically sealed swing inverter compressor										
	Quantity	1										
Fan	Type	Propeller fan										
	Quantity	1										
Air flow rate	Cooling	Nom.	m³/min	63		70		85				
				Heating	Nom.	48.0		55.8		70.4		85.0
Sound power level	Cooling	Nom.	dB(A)			65.5		67.0		69.0		
Sound pressure level	Cooling	Nom.	dB(A)		44.0		47.7		50.8		51.0	
Operation range	Air side	Cooling	Min.~Max.	°CDB		10~43						
		Heating	Min.~Max.	°CDB		-25~25						
	Water side	Cooling	Min.~Max.	°CDB		5~22						
		Heating	Min.~Max.	°CDB		9~60						
Refrigerant	Type/GWP	R-32/675.0										
	Control	Electronic expansion valve										
	Circuits	Quantity	1									
Refrigerant charge	Per circuit		kg		3.80							
	Per circuit		TCO2Eq		2.6							
Unit	Running current	Max	A		14.0							
Power supply	Phase/Frequency/Voltage		Hz/V		3~/50/400							

(1)Cooling: EW 12°C; LW 7°C; ambient conditions: 35°CDB | (2)Cooling: EW 23°C; LW 18°C; ambient conditions: 35°CDB | (3)Condition: Ta DB/WB 7°C/6°C - LWC 35°C (DT = 5°C) | (4)Condition: Ta DB/WB 7°C/6°C - LWC 45°C (Dt=5°C)

Air cooled mini inverter heat pump

- › Choosing for an R-32 product, reduces the environmental impact with 68% compared to R-410A and leads directly to lower energy consumption thanks to its high energy efficiency
- › Inverter chiller
- › Daikin swing compressor
- › New casing for the outdoor units
- › Separate MMI-2 controller for indoor installation



More details and final information can be found by scanning or clicking the QR codes.



EWYA-DW1P-H-

Heating & Cooling		EWYA-D		009DW1P-H-		011DW1P-H-		014DW1P-H-		016DW1P-H-		
Space cooling	A Condition 35°C Pdc	kW		9.35		11.6		12.8		14.0		
	η _{s,c}	%		222		229		226		221		
SEER				5.62		5.79		5.71		5.59		
Space heating	Average climate water outlet 35°C	General	SCOP	4.82		4.73		4.70		4.69		
			Seasonal space heating eff. class	A+++								
Cooling capacity	Nom.	kW		9.35 (1) / 9.10 (2)		11.6 (1) / 11.5 (2)		12.8 (1) / 12.7 (2)		14.0 (1) / 15.3 (2)		
Heating capacity	Nom.	kW		9.37 (3) / 9.00 (4)		10.6 (3) / 9.82 (4)		12.0 (3) / 12.5 (4)		16.0 (3) / 16.0 (4)		
Power input	Cooling	Nom.	kW		2.79 (1) / 1.71 (2)		3.56 (1) / 2.17 (2)		4.06 (1) / 2.51 (2)		4.58 (1) / 3.24 (2)	
	Heating	Nom.	kW		1.91 (3) / 2.43 (4)		2.18 (3) / 2.68 (4)		2.46 (3) / 3.42 (4)		3.53 (3) / 4.56 (4)	
Capacity control	Method		Variable (inverter)									
EER			3.35 (1) / 5.34 (2)		3.26 (1) / 5.31 (2)		3.16 (1) / 5.04 (2)		3.06 (1) / 4.74 (2)			
COP			4.91 (3) / 3.71 (4)		4.83 (3) / 3.66 (4)		4.87 (3) / 3.64 (4)		4.53 (3) / 3.51 (4)			
Dimensions	Unit	Height	mm		870							
		Width	mm		1,380							
		Length	mm		460							
Weight	Unit	kg		147								
Water heat exchanger	Type	Plate heat exchanger										
	Water volume	l		2								
Air heat exchanger	Type	High efficiency fin and tube type with integral subcooler										
Compressor	Type	Hermetically sealed swing inverter compressor										
	Quantity	1										
Fan	Type	Propeller fan										
	Quantity	1										
Air flow rate	Cooling	Nom.	m ³ /min		63		70		85			
		Nom.	m ³ /min		48.0		55.8		70.4		85.0	
Sound power level	Cooling	Nom.	dBA		65.5		67.0		69.0			
Sound pressure level	Cooling	Nom.	dBA		44.0		47.7		50.8		51.0	
Operation range	Air side	Cooling	Min.~Max.	°CDB		10~43						
		Heating	Min.~Max.	°CDB		-25~25						
	Water side	Cooling	Min.~Max.	°CDB		5~22						
		Heating	Min.~Max.	°CDB		9~60						
Refrigerant	Type/GWP	R-32/675.0										
	Control	Electronic expansion valve										
Refrigerant charge	Circuits	Quantity		1								
	Per circuit	kg		3.80								
	Per circuit	TCO ₂ Eq		2.6								
Unit	Running current	Max	A		14.0							
Power supply	Phase/Frequency/Voltage		Hz/V		3~/50/400							

(1)Cooling: EW 12°C; LW 7°C; ambient conditions: 35°CDB | (2)Cooling: EW 23°C; LW 18°C; ambient conditions: 35°CDB | (3)Condition: Ta DB/WB 7°C/6°C - LWC 35°C (DT = 5°C) | (4)Condition: Ta DB/WB 7°C/6°C - LWC 45°C (Dt=5°C)

Air cooled mini inverter heat pump

- › Choosing for an R-32 product, reduces the environmental impact with 68% compared to R-410A and leads directly to lower energy consumption thanks to its high energy efficiency
- › Inverter chiller
- › Daikin swing compressor
- › New casing for the outdoor units
- › Separate MMI-2 controller for indoor installation



EWYA

More details and final information can be found by scanning or clicking the QR codes.



EWYA-DV3P-H-

Heating & Cooling		EWYA-D		009DV3P-H-		011DV3P-H-		014DV3P-H-		016DV3P-H-		
Space cooling	A Condition 35°C Pdc	kW		9.35		11.6		12.8		14.0		
	η _{s,c}	%		222		229		226		221		
SEER				5.62		5.79		5.71		5.59		
Space heating	Average climate water outlet 35°C	General	SCOP	4.82		4.73		4.70		4.69		
			Seasonal space heating eff. class	A+++								
Cooling capacity	Nom.	kW		9.35 (1) / 9.10 (2)		11.6 (1) / 11.5 (2)		12.8 (1) / 12.7 (2)		14.0 (1) / 15.3 (2)		
Heating capacity	Nom.	kW		9.37 (3) / 9.00 (4)		10.6 (3) / 9.82 (4)		12.0 (3) / 12.5 (4)		16.0 (3) / 16.0 (4)		
Power input	Cooling	Nom.	kW		2.79 (1) / 1.71 (2)		3.56 (1) / 2.17 (2)		4.06 (1) / 2.51 (2)		4.58 (1) / 3.24 (2)	
	Heating	Nom.	kW		1.91 (3) / 2.43 (4)		2.18 (3) / 2.68 (4)		2.46 (3) / 3.42 (4)		3.53 (3) / 4.56 (4)	
Capacity control	Method		Variable (inverter)									
EER			3.35 (1) / 5.34 (2)		3.26 (1) / 5.31 (2)		3.16 (1) / 5.04 (2)		3.06 (1) / 4.74 (2)			
COP			4.91 (3) / 3.71 (4)		4.83 (3) / 3.66 (4)		4.87 (3) / 3.64 (4)		4.53 (3) / 3.51 (4)			
Dimensions	Unit	Height	mm		870							
		Width	mm		1,380							
		Length	mm		460							
Weight	Unit	kg		147								
Water heat exchanger	Type	Plate heat exchanger										
	Water volume	l		2								
Air heat exchanger	Type	High efficiency fin and tube type with integral subcooler										
Compressor	Type	Hermetically sealed swing inverter compressor										
	Quantity	1										
Fan	Type	Propeller fan										
	Quantity	1										
	Air flow rate	Cooling	Nom.	m ³ /min	63		70		85		85.0	
	Heating	Nom.	m ³ /min	48.0		55.8		70.4		69.0		
Sound power level	Cooling	Nom.	dBA		65.5		67.0		70.4		69.0	
Sound pressure level	Cooling	Nom.	dBA		44.0		47.7		50.8		51.0	
Operation range	Air side	Cooling	Min.~Max.	°CDB	10~43							
		Heating	Min.~Max.	°CDB	-25~25							
	Water side	Cooling	Min.~Max.	°CDB	5~22							
		Heating	Min.~Max.	°CDB	9~60							
Refrigerant	Type/GWP	R-32/675.0										
	Control	Electronic expansion valve										
	Circuits	Quantity	1									
Refrigerant charge	Per circuit	kg		3.80								
	Per circuit	TCO ₂ Eq		2.6								
Unit	Running current	Max	A		30.8							
Power supply	Phase/Frequency/Voltage		Hz/V		1~/50/230							

(1)Cooling: EW 12°C; LW 7°C; ambient conditions: 35°CDB | (2)Cooling: EW 23°C; LW 18°C; ambient conditions: 35°CDB | (3)Condition: Ta DB/WB 7°C/6°C - LWC 35°C (DT = 5°C) | (4)Condition: Ta DB/WB 7°C/6°C - LWC 45°C (Dt=5°C)



Infinitely flexible
choice in heat pumps



EWYT-B

Multi scroll heat pumps with R-32 refrigerant

- ✓ Top class efficiency, SEER up to 4.92 and SCOP up to 4.06
- ✓ Low environmental impact thanks to R-32 refrigerant
- ✓ Dedicated Scroll Compressors for hot water production up 60°C
- ✓ The Global Warming Potential (GWP) of R-32 refrigerant is 675, which is only one third compared to commonly used refrigerant R-410
- ✓ The low GWP R-32 refrigerant falls into category class A2L in ISO817 and it can be safely used in many applications including chilled water systems
- ✓ As a single component refrigerant, R-32 is also easier to recycle and reuse another environmental plus in its favour
- ✓ Wide capacity range: 80 – 650 kW
- ✓ Optimized Copper -Aluminium Coils improving performances and de-frosting operation
- ✓ Silver and Gold efficiency versions
- ✓ 3 sound configurations
- ✓ 2 different layouts: Parallel Coil and Double V Coil
- ✓ One or Two independent refrigerant circuits
- ✓ Full compatibility with Daikin on Site
- ✓ Extensive option lists
- ✓ Fan speed modulation option (VFD)

Connectivity

Daikin on Site

Fully compatible with Daikin on Site cloud based platform that allows a number of advanced functionalities including:

- › Remote monitoring
- › System optimization
- › Preventive maintenance
- › Remote access with one click via LAN or 4G LTE router

Connection to Intelligent Chiller Manager

Daikin can offer the Intelligent Chiller Manager option, allowing energy optimisation of the system and, when necessary, full customization of the control solutions to the specific installation's needs even in case of more complex installation.

- › High number of units
- › Cooling and Heating mode
- › Peripheral controls



Layouts & Range overview

Parallel coils



Silver Efficiency	75-193 kW 82-213 kW	1 circuit
Gold Efficiency	80-206 kW 86-218 kW	
Silver Efficiency	189-230 kW 209-256 kW	2 circuits
Gold Efficiency	206-250 kW 215-261 kW	

Double-V coils



Silver Efficiency	270-570 kW 300-627 kW	2 circuits
Gold Efficiency	294-630 kW 306-650 kW	

Extensive option lists Including new options:

Partial heat recovery

Introduction of condensation control allowing to maintain heat recovery capacity at lower ambient temperatures with unit operating at full capacity

Buffer tank

Unit mounted buffer tank available all across the range for plug and play solution.

VFD pumps and variable flow control

- › Variable pump speed control via external 0-10 volt signal
- › "Thermostat on" and "thermostat off" pump speed management
- › Variable primary flow control


Master/Slave supplied as standard

Master/Slave functionality allowing to manage up to 4 units on the same system without the need of external control devices.

Fan Silent Mode

The parallel coil units and units with VFD option are standardly equipped with Fan Silent Mode, which reduces fan velocity and therefore unit sound emission on scheduled time bands, enhancing comfort during night operation.

Pumping energy

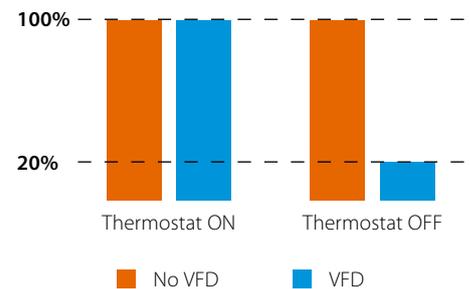

Air cooled multi-scroll heat pump, standard efficiency, reduced sound

- › First R-32 air cooled heat pump with Scroll compressors in the market
- › Choosing for an R-32 product, reduces the environmental impact with 68% compared to R-410A and leads directly to lower energy consumption thanks to its high energy efficiency
- › One or two truly independent refrigerant circuits for outstanding reliability
- › MicroTech 4 controller: sophisticated adaptive software logic for stable operating conditions
- › Low operating cost and extended operating life thanks to the careful design aimed to optimize the energy efficiency of the chillers and to improve installation profitability, effectiveness and economical management
- › Fan speed modulation to ensure precise airflow control and optimized condensing temperature
- › Possible to set up detailed time bands to reduce fan rotation speed and therefore sound emission
- › Thanks to the Dynamic Condensing Pressure Management, the chiller controller adjusts the condensing pressure set-point to minimize the overall chiller power input



EWYT-B-SR

MicroTech 4

More details and final information can be found by scanning or clicking the QR codes.



EWYT-B-SR

Heating & Cooling				EWYT-B-SR																																			
				085	105	135	175	205	215	235	255	300	340	390	430	490	540	590	630																				
SEER				3.82	3.93	3.87	3.96	3.92	3.82	3.83	3.84	4.18	4.37	4.21	4.19	4.49	4.46	4.52																					
Space heating	Average climate water outlet 35°C	General	SCOP	3.35	3.40	3.37	3.42	3.44	3.43	3.32	3.33	3.42	3.49	3.57	3.65	3.60	3.67	3.66																					
			Seasonal space heating eff. class	A+																																			
Cooling capacity	Nom.			kW	74	96	119	150	186	189	209	226	265	311	344	368	424	470	519	557																			
Heating capacity	Nom.			kW	80.91	105.24	131.02	167.11	207.27	209.99	233.05	251.28	295.81	335.24	384.62	426.79	477.49	528.73	581.03	615.34																			
Power input	Cooling	Nom.		kW	28.7	37.4	45.5	59.5	73.2	74.3	80.7	88.8	102	117	131	147	172	195	207	221																			
	Heating	Nom.		kW	27.99	36.24	44.84	58.45	71.9	73.28	81.39	86.29	102.09	113.54	132.02	144.34	160.28	178.33	194.13	206.57																			
Capacity control	Method			Step																																			
	Minimum capacity			%	50	38	50	38	19	50	17	25	22	19	17	25	22	19	18	17																			
EER				2.56	2.58	2.61	2.53	2.54	2.55	2.59	2.55	2.59	2.64	2.61	2.5	2.46	2.41	2.5	2.51																				
COP				2.891	2.904	2.922	2.859	2.883	2.866	2.863	2.912	2.898	2.953	2.913	2.957	2.979	2.965	2.993	2.979																				
IPLV				4.36	4.24	4.3	4.38	4.29	4.28	4.26	4.29	4.69	4.58	4.61	4.78	4.89	4.82	4.91																					
Dimensions	Unit	Height	mm	1,800												2,514																							
		Width	mm	1,195												2,282																							
		Length	mm	2,225	2,825	3,425	4,350	4,025	4,950	3,225			4,125			5,025																							
Weight	Unit			kg	985	1,095	1,195	1,350	1,530	1,830	1,855	2,260	2,410	3,340	3,350	3,340	3,530	4,427																					
	Operation weight			kg	992	1,102	1,202	1,357	1,541	1,841	1,869	2,274	2,430	3,360	3,370	3,367	3,557	4,462	4,468																				
Water heat exchanger	Type			Plate heat exchanger																																			
	Water volume			l	7				11				14				20				27				35				41										
	Water flow rate	Cooling	Nom.	l/s	3.5	4.6	5.7	7.2	8.9	9	10	10.8	12.7	14.8	16.4	17.5	20.2	22.4	24.8	26.6																			
	Water pressure drop	Cooling	Nom.	kPa	14.4	23.4	34.2	52.2	43.5	44.8	53.5	43.6	58.1	47.6	57	64.4	56.3	67.8	56	63.4																			
Air heat exchanger	Type			High efficiency fin and tube type																																			
Compressor	Type			Scroll compressor																																			
	Quantity			2				4				2				4				5				6															
Fan	Type			Direct propeller																																			
	Quantity			4				6				8				10				12				5				6				8				10			
	Air flow rate	Cooling	Nom.	l/s	6,026	9,483	12,644	12,052	15,064	15,065		18,078	23,608	28,330	39,446	38,610	37,774	48,262	47,216																				
	Speed			rpm	1,200								780																										
Sound power level	Cooling	Nom.		dB(A)	78	82	84	85	84	87	86	87	88	89	89.3	89.4	89.5	90.4	90.5																				
Sound pressure level	Cooling	Nom.		dB(A)	60	64	65	67	66	68	67	68	69	69.3	69.4	69.5	70	70.1																					
Refrigerant	Type			R-32																																			
	Charge			kg	13.3	14.7	19.3	24.5	29	34	36.2	43	40.3	47.2	50.4	79	58.5	68.8	77.6	82																			
	Circuits	Quantity		1				2				1				2																							
Piping connections	Evaporator water inlet/outlet (OD)			88.9																114.3																			
Unit	Starting current	Max		A	211.0	327.0	343.0	464.0	408.0	495.0	425.0	439.0	564.0	598.0	636.0	666.0	712.0	757.0	795.0	825.0																			
	Running current	Cooling	Nom.	A	55.0	67.0	77.0	101.0	128.0	126.0	136.0	149.0	173.0	196.0	224.0	251.0	292.0	330.0	353.0	373.0																			
Unit	Running current	Max		A	68.0	85.0	101.0	131.0	166.0	163.0	183.0	197.0	232.0	266.0	304.0	334.0	379.0	425.0	463.0	493.0																			
Power supply	Phase/Frequency/Voltage			Hz/V	3~/50/400																																		

Air cooled multi-scroll heat pump, high efficiency, standard/low sound

- › First R-32 air cooled heat pump with Scroll compressors in the market
- › Choosing for an R-32 product, reduces the environmental impact with 68% compared to R-410A and leads directly to lower energy consumption thanks to its high energy efficiency
- › One or two truly independent refrigerant circuits for outstanding reliability
- › MicroTech 4 controller: sophisticated adaptive software logic for stable operating conditions
- › Low operating cost and extended operating life thanks to the careful design aimed to optimize the energy efficiency of the chillers and to improve installation profitability, effectiveness and economical management
- › Fan speed modulation to ensure precise airflow control and optimized condensing temperature
- › Possible to set up detailed time bands to reduce fan rotation speed and therefore sound emission
- › Thanks to the Dynamic Condensing Pressure Management, the chiller controller adjusts the condensing pressure set-point to minimize the overall chiller power input



More details and final information can be found by scanning or clicking the QR codes.



EWYT-B-XS



EWYT-B-XL

Heating & Cooling				EWYT-B-XS/XL																VFDFAN																																																							
				085				115				135				175				215				235				265				310				350				400				440				500				560				600				630				650											
				310				350				400				440				500				560				600				630				650				310				350				400				440				500				560				600				630				650			
SEER				4.24	4.38	4.24	4.45	4.41	4.21	4.4	4.13	4.57	4.67	4.54	4.57	4.72	4.71	4.7	4.69	4.4	4.66	4.81	4.68	4.63	4.86	4.83	4.83	4.82	4.58	4.66	4.81	4.68	4.63	4.86	4.83	4.83	4.82	4.58																																					
Space heating	Average climate water outlet 35°C	General	SCOP	3.70	3.72	3.70	3.67	3.70	3.66	3.86	3.77	3.90	3.82	3.85	3.83	3.81	3.79	3.76	3.53	3.96	3.97	3.93	3.91	3.96	3.93	3.87	3.68	3.96	3.97	3.93	3.91	3.96	3.93	3.87	3.68																																								
			Seasonal space heating eff. class	A+																																																																							
Cooling capacity	Nom.			80	104	126	166	206	229	250	288	328	370	406	467	519	560	597	610	288	328	370	406	467	519	560	597	610	288	328	370	406	467	519	560	597	610																																						
Heating capacity	Nom.			85.86	111.02	133.18	176.29	214.81	218.29	239.37	280.83	305.53	349.96	400.64	443.87	500.13	555.95	598.67	633.91	649.7	305.53	349.96	400.64	443.87	500.13	555.95	598.67	633.91	649.7	305.53	349.96	400.64	443.87	500.13	555.95	598.67	633.91	649.7																																					
Power input	Cooling	Nom.			26.3	35.1	42.1	56.6	68	71.8	74.9	83.4	93.9	107	122	134	158	177	193	204	207	94.1	107	123	135	158	177	193	205	207	94.1	107	123	135	158	177	193	205	207																																				
	Heating	Nom.			26.06	33.19	39.11	51.68	62.55	64.91	69.49	76.15	88.61	101.7	117.65	127.8	147.3	165.04	179.94	191.66	203.16	88.81	101.93	117.94	128.08	147.63	165.38	180.33	192.05	203.95	88.81	101.93	117.94	128.08	147.63	165.38	180.33	192.05	203.95																																				
Capacity control	Method			Step																																																																							
	Minimum capacity			50	38	50	38	19	50	17	25	22	19	17	25	22	19	18	17	22	19	17	25	22	19	18	17	22	19	17	25	22	19	18	17																																								
EER				3.03	2.95	2.99	2.93	3.03	2.86	3.06	3	3.06	3.05	3.02	3.01	2.95	2.93	2.9	2.92	2.95	3.06	3.05	3.01	3.05	3.01	2.95	2.92	2.94	3.06	3.05	3.01	3.05	3.01	2.95	2.92	2.94																																							
COP				3.295	3.345	3.405	3.411	3.434	3.363	3.444	3.425	3.448	3.441	3.405	3.473	3.395	3.369	3.327	3.308	3.198	3.44	3.433	3.397	3.466	3.388	3.362	3.32	3.301	3.186	3.44	3.433	3.397	3.466	3.388	3.362	3.32	3.301	3.186																																					
IPLV				4.75	4.69	4.87	4.72	4.87	4.64	4.94	4.96	5	5.1	5.08	5.05	4.66	4.97	5.16	5.13	5.16	5.3	5.16	5.3	5.29	5.22	5.16	4.99	4.97	5.16	5.13	5.16	5.3	5.29	5.22	5.16	4.99																																							
Dimensions	Unit	Height	mm	1,800																2,514																																																							
		Width	mm	1,195																2,282																																																							
		Length	mm	2,825	3,425	4,025	5,550	4,625	6,150	4,125	5,025	5,925	6,825	4,125	5,025	5,925	6,825	4,125	5,025	5,925	6,825	4,125	5,025	5,925	6,825	4,125	5,025	5,925	6,825	4,125	5,025	5,925	6,825																																										
Weight (XS)	Unit			1,080	1,140	1,220	1,400	2,000	1,600	2,300	2,350	2,830	3,080	3,650	3,750	4,206	4,296	4,760	4,860	2,830	3,080	3,650	3,750	4,206	4,296	4,760	4,860	2,830	3,080	3,650	3,750	4,206	4,296	4,760	4,860																																								
	Operation weight			1,091	1,151	1,231	1,416	2,035	1,616	2,335	2,385	2,865	3,115	3,685	3,812	4,268	4,366	4,830	4,930	2,865	3,115	3,685.37	3,811.88	4,267.88	4,366.2	4,830.2	4,930.2	2,865	3,115	3,685.37	3,811.88	4,267.88	4,366.2	4,830.2	4,930.2																																								
Weight (XL)	Unit			1,110	1,170	1,250	1,430	2,030	1,610	2,330	2,380	3,140	3,240	3,810	3,910	4,366	4,456	4,920	5,020	3,140	3,240	3,650	3,750	4,206	4,296	4,760	4,860	3,140	3,240	3,650	3,750	4,206	4,296	4,760	4,860																																								
	Operation weight			1,121	1,181	1,261	1,446	2,065	1,626	2,365	2,415	3,175	3,275	3,845	3,972	4,428	4,526	4,990	5,090	3,175	3,275	3,685.37	3,811.88	4,267.88	4,366.2	4,830.2	4,930.2	3,175	3,275	3,685.37	3,811.88	4,267.88	4,366.2	4,830.2	4,930.2																																								
Water heat exchanger	Type			Plate heat exchanger																																																																							
	Water volume			11	16	35	16	35	62	70	35	62	70	35	62	70	35	62	70	35	62	70	35	62	70	35	62	70	35	62	70	35	62	70	35	62	70																																						
	Water flow rate	Cooling	Nom.	3.8	5	6	7.9	9.8	10.9	11.9	13.7	15.7	17.7	19.4	22.3	24.7	26.7	28.5	29.1	13.7	15.7	17.7	19.4	22.3	24.7	26.7	28.5	29.1	13.7	15.7	17.7	19.4	22.3	24.7	26.7	28.5	29.1																																						
	Water pressure drop	Cooling	Nom.	9.49	15.2	21.5	20.1	12	29.6	14.6	17.1	22	27.9	34.7	23.6	30.4	33.6	38.6	43.2	45	22	27.9	34.7	23.6	30.4	33.6	38.6	43.2	45	22	27.9	34.7	23.6	30.4	33.6	38.6	43.2	45																																					
Air heat exchanger	Type			High efficiency fin and tube type																																																																							
Compressor	Type			Scroll compressor																																																																							
	Quantity			2	4	2	4	5	6	4	5	6	4	5	6	4	5	6	4	5	6	4	5	6	4	5	6	4	5	6	4	5	6	4	5	6																																							
Fan	Type			Direct propeller																																																																							
	Quantity			6	8	10	14	12	16	7	8	10	12	14	7	8	10	12	14	7	8	10	12	14	7	8	10	12	14	7	8	10	12	14	7	8	10	12	14																																				
	Air flow rate	Nom.			9,039	12,644	12,052	15,065	21,090	18,078	24,104	29,593	33,820	43,351	42,276	52,021	50,730	60,692	59,186	78,410	29,593	33,820	43,351	42,276	52,021	50,730	60,692	59,186	78,410	29,593	33,820	43,351	42,276	52,021	50,730	60,692	59,186	78,410																																					
	Speed			1,200																900																																																							
Sound power level (XS)	Cooling	Nom.			81	86	88	90	89	91	90	91	92	93	94.2	94.8	95.3	95.6	96.1	96.5	98.4	92.4	93.4	94.2	94.8	95.3	95.6	96.1	96.5	98.4	92.4	93.4	94.2	94.8	95.3	95.6	96.1	96.5	98.4																																				
Sound power level (XL)	Cooling	Nom.			79.5	82.6	84.1	86.2	85.4	87.5	86.4	87.1	86	87	88	88.2	88.9	89	89.6	89.7	95.3	86.4	87.1	88	88.2	88.9	89	89.6	89.7	95.3	86.4	87.1	88	88.2	88.9	89	89.6	89.7	95.3																																				
Sound pressure level (XS)	Cooling	Nom.			63	67	69	71	69	73	70	71	72	73	73.8	74.4	74.5	74.8	75	75.4	77.3	72.4	73.4	73.8	74.4	74.5	74.8	75	75.4	77.3	72.4	73.4	73.8	74.4	74.5	74.8	75	75.4	77.3																																				
Sound pressure level (XL)	Cooling	Nom.			61	64	65	67	66	68	66	67	66	67	67.6	67.8	68.1	68.2	68.5	68.6	74.2	66.4	67.1	67.6	67.8	68.1	68.2	68.5	68.6	74.2	66.4	67.1	67.6	67.8	68.1	68.2	68.5	68.6	74.2																																				
Refrigerant	Type			R-32																																																																							
	Charge (XS)			17.7	18.3	22	33.7	42.4	51.6	48.6	46	52.4	60.4	70.5	84	87.5	92	114	100	113	52.4	60.4	70.5	84	87.5	92	114	100	113	52.4	60.4	70.5	84	87.5	92	114	100	113																																					
	Charge (XL)			17.7	18.3	22	33.7	42.4	51.6	48.6	46	52.4	63	68.5	78	88.5	93	108	104	113	52.4	63	68.5	78	88.5	93	108	104	113	52.4	63	68.5	78	88.5	93	108	104	113																																					
	Circuits			1																2																																																							
Piping connections	Evaporator water inlet/outlet (OD)			88.9																114.3																																																							
Unit	Starting current	Max			A	213.0	329.0	343.0	465.0	412.0	497.0	429.0	443.0	562.0	594.0	629.0	659.0	710.0	755.0	790.0	820.0	841.0	572	606	644	674	728	773	811	841	572	606	644	674	728	773	811	841																																					
	Running current	Cooling	Nom.			A	53.0	65.0	75.0	99.0	122.0	123.0	132.0	143.0	170.0	192.0	215.0	236.0	276.0	313.0	338.0	358.0	361.0	170	193	216	237	277	313	339	359	362	170	193	216	237	277	313	339	359	362																																		
Unit	Running current	Max			A	70.0	87.0	101.0	133.0	170.0	165.0	186.0	201.0	229.0	262.0	297.0	327.0	370.0	423.0	458.0	488.0	509.0	240	274	312	342	395	441	479	509	240	274	312	342	395	441	479	509																																					
Power supply	Phase/Frequency/Voltage			3~/50/400																																																																							

Air cooled multi-scroll heat pump, high efficiency, reduced sound

- › First R-32 air cooled heat pump with Scroll compressors in the market
- › Choosing for an R-32 product, reduces the environmental impact with 68% compared to R-410A and leads directly to lower energy consumption thanks to its high energy efficiency
- › One or two truly independent refrigerant circuits for outstanding reliability
- › MicroTech 4 controller: sophisticated adaptive software logic for stable operating conditions
- › Low operating cost and extended operating life thanks to the careful design aimed to optimize the energy efficiency of the chillers and to improve installation profitability, effectiveness and economical management
- › Fan speed modulation to ensure precise airflow control and optimized condensing temperature
- › Possible to set up detailed time bands to reduce fan rotation speed and therefore sound emission
- › Thanks to the Dynamic Condensing Pressure Management, the chiller controller adjusts the condensing pressure set-point to minimize the overall chiller power input



EWYT-B

More details and final information can be found by scanning or clicking the QR codes.



EWYT-B-XR

Heating & Cooling				EWYT-B-XR																						
				085	115	135	175	215	215	235	265	310	350	400	440	500	560	600	630	650						
SEER				4.21	4.37	4.21	4.41	4.16	4.42	4.43	4.13	4.74	4.8	4.82	4.63	4.92	4.89	4.83	4.79	4.72						
Space heating		Average climate water outlet 35°C	General	SCOP			Seasonal space heating eff. class			A+																
Cooling capacity				Nom.	kW	79	103	124	164	203	204	227	247	282	321	364	398	458	507	548	583	600				
Heating capacity				Nom.	kW	84.9	110.32	132.02	174.14	216.57	213.48	237.57	256.58	301.04	344.8	395.81	438.23	494.13	549.6	588.57	620.71	637.4				
Power input		Cooling	Nom.	kW		26.6	35.4	42.6	57.4	72.9	68.8	75.7	84.4	95.2	109	124	136	160	180	196	208	203				
		Heating	Nom.	kW		25.87	32.94	38.82	51.3	64.51	62.13	68.99	75.49	86.32	99.1	114.46	124.61	143.5	161.2	175.33	186.93	193.22				
Capacity control		Method		Step																						
		Minimum capacity		%		50	38	50	38	50	19	17	25	22	19	17	25	22	19	18	17					
EER				2.98	2.9	2.92	2.86	2.79	2.97	3	2.93	2.96	2.95	2.93	2.91	2.85	2.81	2.8	2.94							
COP				3.282	3.349	3.401	3.394	3.357	3.436	3.443	3.399	3.487	3.479	3.458	3.517	3.443	3.409	3.357	3.321	3.299						
IPLV				4.73	4.67	4.65	4.67	4.86	4.82	4.62	4.92	5.12	5.26	5.12	5.34	5.32	5.22	5.23	5.19							
Dimensions		Unit	Height	1,800										2,514												
			Width	1,195										2,282												
			Length	2,825		3,425		4,025		4,625		5,550		6,150		4,125		5,025		5,925		6,825				
Weight		Unit	kg		1,110	1,170	1,250	1,430	1,610	2,030	2,330	2,380	3,140	3,240	3,810	3,910	4,366	4,456	4,920	5,020						
		Operation weight		kg		1,121	1,181	1,261	1,446	1,626	2,065	2,365	2,415	3,175	3,275	3,845	3,972	4,428	4,526	4,990	5,090					
Water heat exchanger		Type		Plate heat exchanger																						
		Water volume		l			11			16			35			62			70							
		Water flow rate	Cooling	Nom.	l/s		3.8	4.9	5.9	7.8	9.7		10.8	11.8	13.4	15.3	17.3	19	21.8	24.2	26.2	27.8	28.6			
		Water pressure drop	Cooling	Nom.	kPa		9.33	14.9	21.1	19.6	28.9	11.8	14.3	16.8	21.2	26.8	33.5	22.7	29.2	32.2	37.1	41.4	43.7			
Air heat exchanger		Type		High efficiency fin and tube type																						
Compressor		Type		Scroll compressor																						
		Quantity		2			4			5			6													
Fan		Type		Direct propeller																						
		Quantity		6		8		10		12		14		16		7		8		10		12		14		
		Air flow rate		Nom.		l/s		8,298	11,630	11,064	13,830	16,596	19,362	22,128	25,074	28,656	36,808	35,820	44,169	42,984	51,531	50,148	66,104			
		Speed		rpm		1,108		600		780																
Sound power level		Cooling	Nom.	dBA		77	81	83	85	87	84	85	86	84	85.2	85.5	86.2	86.3	86.9	87.1	91.6					
Sound pressure level		Cooling	Nom.	dBA		59	63	65	67	68	65	66	66	64	64.8	65.1	65.4	65.5	65.8	66	70.5					
Refrigerant		Type		R-32																						
		Charge		kg		17.4	18.4	21.5	30	40	44.6	50	53.4	54.4	62	71.5	78	89	93	103.4	106	109				
		Circuits		Quantity		1			2																	
Piping connections		Evaporator water inlet/outlet (OD)		88.9										114.3												
Unit		Starting current		Max		A		213.0	329.0	343.0	465.0	497.0	412.0	429.0	443.0	572.0	606.0	644.0	674.0	728.0	773.0	811.0	841.0			
		Running current		Cooling		Nom.		A		53.0	65.0	75.0	100.0	124.0	123.0	133.0	145.0	169.0	192.0	214.0	237.0	276.0	315.0	339.0	360.0	353.0
Unit		Running current		Max		A		70.0	87.0	101.0	133.0	165.0	170.0	186.0	201.0	240.0	274.0	312.0	342.0	395.0	441.0	479.0	509.0			
Power supply		Phase/Frequency/Voltage		Hz/V		3~/50/400																				



Air cooled scroll inverter heat pump, split version

- › Inverter Heat Pump in Split version
- › Daikin scroll compressor
- › High part load efficiency for low running cost
- › Glycol free application
- › Wide operation range and hot water production up to 60°C
- › Integrated hydronic module as standard



More details and final information can be found by scanning or clicking the QR codes.



Indoor Unit		EWYT		021CZI-A1	032CZI-A1	040CZI-A1	064CZI-A2
Casing	Colour	Ivory white					
	Material	Galvanized and painted steel sheet					
Dimensions	Unit	HeightxWidthxDepth	mm	700x1,120x830			
Weight	Unit		kg	133	144		172
Operation range	Heating	Ambient	Min.~Max.	°C		-20 ~35	
		Water side	Min.~Max.	°C		20 ~60	
	Cooling	Ambient	Min.~Max.	°CDB		-20 ~45	
		Water side	Min.~Max.	°C		4 ~20	
Sound power level	Nom.		dB(A)	63.0	64.5		66.0



Air cooled scroll inverter heat pump, split version

- › Inverter Heat Pump in Split version
- › Daikin scroll compressor
- › High part load efficiency for low running cost
- › Glycol free application
- › Wide operation range and hot water production up to 60°C
- › Integrated hydronic module as standard



More details and final information can be found by scanning or clicking the QR codes.



Outdoor Unit		EWYT		021CZO-A1	032CZO-A1	040CZO-A1	064CZO-A2
Dimensions	Unit	HeightxWidthxDepth	mm	1,878x1,152x802	1,878x1,752x802		1,878x2,906x814
Weight	Unit		kg	265	357		620
Compressor	Quantity	1					
	Type	Scroll compressor					
Refrigerant	Type	R-32					
	GWP	675.0					
	Charge	kg	7.3	9.5	9.8	16.6	
Sound power level	Cooling	Nom.	dBA	4,928.0	6,422.0	6,635.0	11,255.0
			dBA	76.0	79.0	80.0	83.0
Sound pressure level	Cooling	Nom.	dBA	59.6	62.2	63.2	65.4
Power supply	Phase/Frequency/Voltage		Hz/V	3N~/50 /400			





Air cooled screw inverter heat pump, standard efficiency, standard sound

- › Ideal solution for commercial comfort cooling and/or heating applications
- › Optimum ESEER values
- › 2-3 truly independent refrigerant circuits
- › Low starting current
- › DX shell and tube evaporator – one pass refrigerant side to minimize pressure drops
- › Standard electronic expansion valve
- › Optimised defrost cycles
- › Partial and total heat recovery option available
- › Power factor up to 0.95
- › PID microprocessor control



More details and final information can be found by scanning or clicking the QR codes.




Heating & Cooling				EWYD-BZSS	250	270	290	320	340	370	380	410	440	460	510	530	570	
SEER																4.57	4.55	
Space heating	Average climate water outlet 35°C	General	SCOP		3.21		3.20		3.21				3.20					
Cooling capacity	Nom.			kW	253	272	291	323	337	363	380	411	433	455	515	533	569	
Heating capacity	Nom.			kW	271	298	325	334	350	380	412	445	465	477	532.86	560.55	618.33	
Power input	Cooling	Nom.		kW	91.3	101	110	117	125	135	144	154	165	163	183	189	217	
	Heating	Nom.		kW	91.4	100	108	118	126	133	143	157	167	165	177.37	184.84	208.14	
Capacity control	Method				Stepless													
	Minimum capacity			%	13.0									9.0		9		
EER					2.77	2.70	2.65	2.75	2.69	2.68	2.63	2.66	2.62	2.79	2.81		2.62	
ESEER					3.93	3.92	3.89	3.95	3.89	3.90	3.82	3.91	3.89	4.18				
COP					2.96	2.97	3.00	2.82	2.78	2.85	2.88	2.83	2.79	2.88	3.004	3.033	2.971	
IPLV					4.58	4.62		4.75	4.64	4.71	4.67	4.73	4.69	4.85	4.89	4.85	4.77	
Dimensions	Unit	Height	mm	2,335											2,280			
		Width	mm	2,254											2,254			
		Length	mm	3,547			4,428				5,329		6,659		6,659			
Weight	Unit	Operation weight		kg	3,410	3,455	3,500	3,870		3,940	4,010	4,390		5,015	5,495	5,735		
		Operation weight		kg	3,550	3,595	3,640	4,010		4,068	4,138	4,518		5,255	5,724	5,964	5,953	
Water heat exchanger	Type				Single pass shell & tube											Shell and tube		
	Water volume			l	138						128			240		229		218
	Water flow rate	Cooling	Nom.	l/s	12.1	13.0	13.9	15.5	16.2	17.4	18.2	19.7	20.8	21.8	24.7	25.5	27.3	
		Heating	Nom.	l/s	13.1	14.4	15.7	16.1	16.9	18.3	19.8	21.4	22.4	23.0				
Water pressure drop	Cooling	Nom.	kPa	40	46	44	50	55	60	65	74	80	47	68.4	46.5	52.4		
	Heating	Nom.	kPa	30	35	52	37	40	45	51	59	64	42					
Air heat exchanger	Type				High efficiency fin and tube type with integral subcooler											High efficiency fin and tube type		
Compressor	Type				Single screw compressor													
	Quantity				2											3	3	
Fan	Type				Direct propeller													
	Quantity				6			8			10		12		12			
	Air flow rate Nom.			l/s	31,729	31,422	31,115	42,306		42,337	41,487	52,882		63,458	62,640	61,652	48,191	
	Speed			rpm	900													
Sound power level	Cooling	Nom.	dBA	101						102		104		103.6				
Sound pressure level	Cooling	Nom.	dBA	82						83		84		83.7				
Operation range	Air side	Cooling	Min.~Max.	°CDB	-10~45									---				
		Heating	Min.~Max.	°CDB	-10~20									---				
	Water side	Cooling	Min.~Max.	°CDB	-8~15									---				
		Heating	Min.~Max.	°CDB	35~55									---				
Refrigerant	Type/GWP				R-134a/1,430											R-134a/-		
	Charge			kg												141	147	
	Circuits			Quantity	2											3	3	
Refrigerant charge	Per circuit			kg	43.0	44.0	43.0	46.0	46.5		47.0	50.0		47.0				
	Per circuit			TCO2eq	61.5	62.9	61.5	65.8	66.5		67.2	71.5		67.2				
Piping connections	Evaporator water inlet/outlet (OD)				139.7mm											219.1mm		
Unit	Starting current	Max		A	150			181	204			224	238	245	327	355	344	
		Running current	Cooling	Nom.	A	137	150	164	176	188	202	214	229	244	246	298	310	349
	Max		A	211			212	254	288			316	336	329	433	474	458	
Power supply	Phase/Frequency/Voltage			Hz/V	3~/50/400											3~/50/400		



Air cooled screw inverter heat pump, standard efficiency, low sound

- › Ideal solution for commercial comfort cooling and/or heating applications
- › Optimum ESEER values
- › 2-3 truly independent refrigerant circuits
- › Low starting current
- › DX shell and tube evaporator – one pass refrigerant side to minimize pressure drops
- › Standard electronic expansion valve
- › Optimised defrost cycles
- › Partial and total heat recovery option available
- › Power factor up to 0.95
- › PID microprocessor control

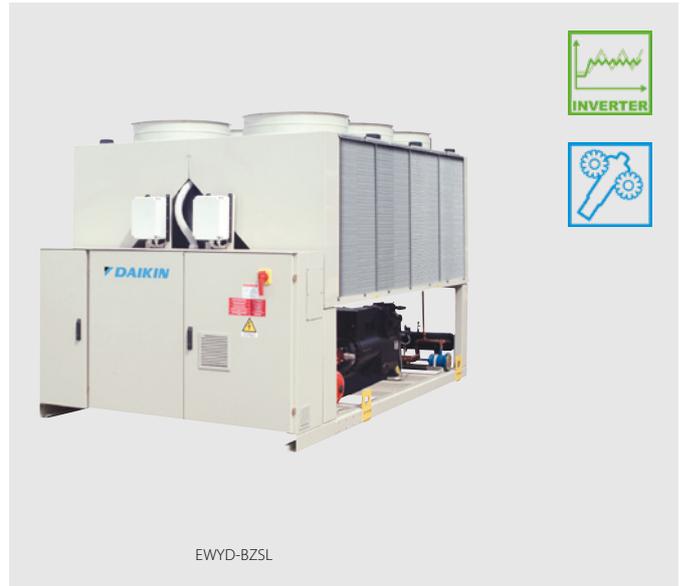

More details and final information can be found by scanning or clicking the QR codes.



EWYD-BZSL

Heating & Cooling				EWYD-BZSL	250	270	290	320	330	360	370	400	430	450	510	530	570	
SEER					3.21		3.20		-			3.21		3.20		4.56	4.6	4.55
Space heating	Average climate water outlet 35°C	General	SCOP		3.21		3.20		-			3.21		3.20		4.56	4.6	4.55
Cooling capacity	Nom.			kW	247	265	290	315	330	353	370	401	423	446	503	519	569	
	Heating capacity	Nom.		kW	271	298	325	334	350	380	412	445	465	477	532.86	560.55	618.33	
Power input	Cooling	Nom.		kW	89.5	99.5	110	115	123	134	144	151	163	158	178	185	217	
	Heating	Nom.		kW	91.4	100	108	118	126	133	143	157	167	165	177.37	184.84	208.14	
Capacity control	Method				Stepless													
	Minimum capacity			%	13.0										9.0	9		
EER					2.76	2.66	2.62	2.75	2.68	2.64	2.57	2.66	2.59	2.83	2.82	2.8	2.62	
ESEER					4.06	4.04	4.03	4.17	4.09	4.04	4.01	4.06	4.02	4.18		-		
COP					2.96	2.97	3.00	2.82	2.78	2.85	2.88	2.83	2.79	2.88	3.004	3.033	2.971	
IPLV					4.90	4.96	4.91	5.17	5.08	5.12	5.06	5.22	5.13	5.07	5.03	4.99	4.89	
Dimensions	Unit	Height	mm		2,335										2,280	2,280		
		Width	mm		2,254										2,254	2,254		
		Length	mm		3,547		4,428			5,329		6,659		6,659				
Weight	Unit		kg	3,750	3,795	3,840	4,210		4,280	4,350	4,730		5,525	6,005	6,245			
		Operation weight	kg	3,888	3,933	3,978	4,343		4,408	4,478	4,858		5,765	6,234	6,474	6,463		
Water heat exchanger	Type				Single pass shell & tube										Shell and tube			
	Water volume		l		138		133		128		240		229		218			
	Water flow rate	Cooling	Nom.	l/s	11.8	12.7	13.9	15.1	15.8	16.9	17.7	19.2	20.3	21.4	24.1	24.9	27.3	
		Heating	Nom.	l/s	13.1	14.4	15.7	16.1	16.9	18.3	19.8	21.4	22.4	23.0	-			
Water pressure drop	Cooling	Nom.	kPa	38	44	42	48	53	57	62	71	77	45	65.5	44.4	52.4		
	Heating	Nom.	kPa	30	35	52	37	40	45	51	59	64	42	-				
Air heat exchanger	Type				High efficiency fin and tube type with integral subcooler										High efficiency fin and tube type			
Compressor	Type				Single screw compressor													
	Quantity				2										3	3		
Fan	Type				Direct propeller													
	Quantity				6		8			10		12		12				
	Air flow rate	Nom.		l/s	-										48,415	47,732	48,191	
		Cooling	Nom.	l/s	24,432	24,264	24,095	32,576	32,628	32,127	40,720		48,863	-				
Speed			rpm	700										900				
Sound power level	Cooling	Nom.		dB(A)	94		95			97		97						
Sound pressure level	Cooling	Nom.		dB(A)	76										77	77.2		
Operation range	Air side	Cooling	Min.-Max.	°CDB	-10~45										---			
		Heating	Min.-Max.	°CDB	-10~20										---			
	Water side	Cooling	Min.-Max.	°CDB	-8~15										---			
		Heating	Min.-Max.	°CDB	35~55										---			
Refrigerant	Type/GWP			R-134a/1,430										R-134a/-				
Charge			kg	-										141	147			
Refrigerant charge	Circuits	Quantity			2										3	3		
		Per circuit	kg	43.0	44.0	43.0	46.0	46.5	47.0	50.0	47.0	-						
	Per circuit	TCO2eq		61.5	62.9	61.5	65.8	66.5	67.2	71.5	67.2	-						
Piping connections	Evaporator water inlet/outlet (OD)				139.7mm										219.1mm			
Unit	Starting current	Max	A	145	146		176	199			217	231	234	316	344			
		Running current	Cooling	Nom.	A	134	148	163	171	184	199	212	224	240	238	291	305	349
			Max	A	202	203		243	277			302	322	313	416	458		
Power supply	Phase/Frequency/Voltage		Hz/V	3~/50/400										3~/50/400				



EWYD-4Z

Air to water
Multipurpose unit

4-pipe system solution with full inverter technology
For independent and simultaneous cooling and heating all year round

1
Top class efficiency
Total Energy Ratio up to 8.8

Full inverter technology:
the best choice for
every application

2
Easy part load calculation
via the tool CSS WEB

3
Best solution for simultaneous
cooling and heating
Big multipurpose buildings, hotels, hospital are just
a few examples of application for multipurpose units

Daikin single screw compressor with integrated inverter and Variable Volume Ratio Technology

The inverter integrated in the compressor is refrigerant cooled:

- > Safe and robust cooling system, totally independent from outdoor ambient conditions and air quality.
- > Suitable even for aggressive installation such as industrial or desert application.

The volume ratio will change by moving the sliding valves.

VVR changes the point at which the gas leaves the compressor, and therefore changes the pressures at discharge which will be optimal at any condition.

Upon defining the design condition in the unit selection page it is possible to calculate the unit performances in every in-between condition with a different load

Check on
YouTube
www.youtube.com/
DaikinEurope

> Daikin EWYD-4Z
Multipurpose Unit




> Daikin EWYD-4Z
Multipurpose Unit –
Behind the scenes



Air to Water Multipurpose unit

- › Best solution for independent and simultaneous cooling and heating all year round
- › Daikin single screw compressor with integrated inverter and Variable Volume Ratio Technology
- › High Efficiency Inverter fans with optimized geometry ensures the best ratio between airflow and power input.
- › Wide operating envelope for cooling and heating with extra capacity in Boosted operation and Rapid Restart functionality

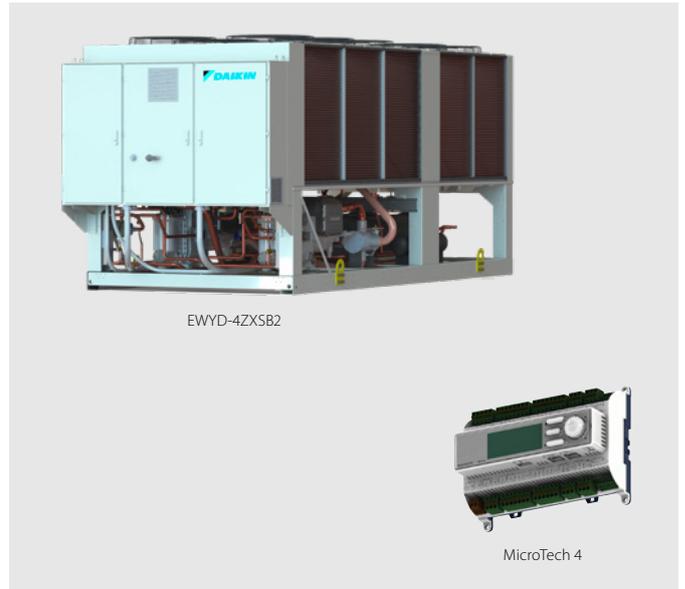

More details and final information can be found by scanning or clicking the QR codes.



EWYD-4ZXS2

Multipurpose		EWYD-4ZXS2									
		400	450	500	550	600	650	700	800		
Air to water – cooling only (1)	Nominal Rated Capacity – Net	kW	402.4	438.4	502.8	523.4	602.4	653.7	702.9	785.7	
	EER – Net		3.17	3.15	3.25	3.08	3.25	3.19	3.37	3.29	
Air to water – heating only (2)	Nom. Rated Capacity – Net	kW	402.7	439.7	503.5	545.2	600.9	654.7	702.4	803.0	
	COP – Net		3.33	3.41	3.45	3.44	3.45	3.38	3.55	3.54	
Water to water – Cooling + heating (3)	Nom. Rated Capacity COOLING – Net	kW	313.2	351.6	393.9	430.4	479.4	516	553.3	634.4	
	Nom. Rated Capacity HEATING – Net	kW	402.4	449.3	503.4	549.4	608.8	658.3	707.1	808.9	
	TER – Net		8.03	8.19	8.2	8.24	8.4	8.25	8.2	8.27	
Dimensions	Height	mm	2,465								
	Width	mm	2,285								
	Length	mm	5,825		6,725		7,625		8,525		
Weight	Unit Weight	kg	6,075	6,095	6,870	6,870	7,850	8,435	9,405	9,430	
	Operating Weight	kg	6,540	6,560	7,560	7,560	8,935	9,540	10,785	10,820	
	Cold/Hot side water connections	mm	219.1								
Sound level	Sound Power – Cooling (4)	dB(A)	99	98	99	100	102				
	Sound Pressure – Cooling at 1 m (5)	dB(A)	78	77	78	79	80				
Water heat exchangers	Cold Side	Water Volume	l	126	126	214	214	369	361	468	468
		Water flow rate (1)	l/s	19.3	21.0	24.1	25.1	28.8	31.3	33.6	37.6
		Water pressure drop (1)	kPa	42.0	50.8	40.1	47.8	48.0	34.2	40.7	37.1
	Hot Side	Water Volume	l	126	126	214	214	369	361	468	468
		Water flow rate (2)	l/s	9.1	9.1	13.4	13.4	14.6	19.5	20.8	26.1
		Water pressure drop (2)	kPa	19.4	21.146	24.3	26.334	29	31.6	33.9	38.7
Fan	Quantity	n	10		12		14		16		
	Nominal air flow (1)	l/s	56,550		67,860		79,170		90,480		
Compressor	Type		Single screw								
	Oil charge	l	28						38		
	Quantity	n.	2								
Refrigerant circuit	Refrigerant type		R134a								
	Refrigerant charge	kg	198	207	200	219	247	260	328	354	
	Circuits	n.	2								
Power Supply	Phase/Frequency/Voltage	Hz/V	3~/50/400								

Fluid: Water; Fouling factor = 0

(1) Operation in Air to water "Cooling only" mode rated at 35°C ambient temperature, 50% R.H.; Entering water temperature 12°C, Outlet water temperature 7°C.

(2) Operation in Air to water "Heating only" mode rated at 7°C ambient temperature, 85% R.H.; Entering water temperature 40°C, Outlet water temperature 45°C.

(3) Operation in Water to water "Cooling + Heating" mode rated with water flowing on cold and hot heat exchangers determined respectively at conditions (1) and (2) - Chilled water outlet temperature 7°C, Hot water outlet temperature 45°C.

(4) Sound power level are referred to condition (1) for Cooling and (2) for Heating. The data are measured in accordance with ISO 9614 and Eurovent 8/1 for Eurovent certified units.


The certification refers only to the overall sound power level.

(5) Sound pressure is calculated from the sound power level and it is for information only and not considered binding.

All the above data are referred to standard units without options and are subject to change without notice.

Air to Water Multipurpose unit

- › Best solution for independent and simultaneous cooling and heating all year round
- › Daikin single screw compressor with integrated inverter and Variable Volume Ratio Technology
- › High Efficiency Inverter fans with optimized geometry ensures the best ratio between airflow and power input.
- › Wide operating envelope for cooling and heating with extra capacity in Boosted operation and Rapid Restart functionality

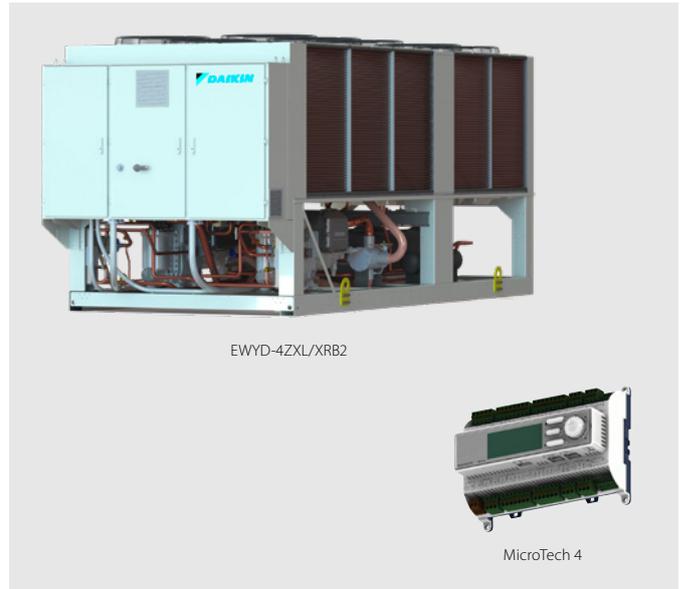

More details and final information can be found by scanning or clicking the QR codes.



EWYD-4ZXR2

Multipurpose		EWYD-4ZXR2		400	450	500	550	600	650	700	800	
Air to water – cooling only (1)	Nominal Rated Capacity – Net	kW	357.9	400.4	451.9	496.2	548.0	596.5	619.1	690.0		
	EER – Net		3.05	3.06	3.12	3.06	3.11	3.07	3.19	3.08		
Air to water – heating only (2)	Nom. Rated Capacity – Net	kW	358.3	398.7	452.2	493.4	550.7	601	620.9	690.8		
	COP – Net		3.48	3.65	3.65	3.63	3.59	3.55	3.67	3.71		
Water to water – Cooling + heating (3)	Nom. Rated Capacity COOLING – Net	kW	281.5	312.7	351.1	383.1	435.2	473.1	489.3	543.8		
	Nom. Rated Capacity HEATING – Net	kW	361.4	399.5	448.1	487.9	550.5	602.1	625.3	693.3		
	TER – Net		8.04	8.20	8.24	8.31	8.55	8.33	8.19	8.27		
Dimensions	Height	mm	2,465									
	Width	mm	2,285									
	Length	mm	5,825			6,725		7,625		8,525		
Weight	Unit Weight	kg	6,240	6,260	7,035	7,035	8,015	8,600	9,690	9,715		
	Operating Weight	kg	6,705	6,725	7,725	7,725	9,100	9,705	11,075	11,110		
	Cold/Hot side water connections	mm	219.1									
Sound level	Sound Power – Cooling (4)	dB(A)	87	86	87		88		90			
	Sound Pressure – Cooling at 1 m (5)	dB(A)				66				68	69	
Water heat exchangers	Cold Side	Water Volume	126		214		369	361	468			
		Water flow rate (1)	l/s	17.1	19.2	21.6	23.7	26.2	28.5	29.6	33.0	
		Water pressure drop (1)	kPa	31.8	37.1	31.7	38.7	39	27	33.7	28.1	
	Hot Side	Water Volume	l	126	126	214	214	369	361	468	468	
		Water flow rate (2)	l/s	17.3	19.2	21.8	23.8	26.6	29.0	30.0	33.3	
		Water pressure drop (2)	kPa	31.8	38.5	27.7	33.6	32	23.8	28.5	24.4	
Fan	Quantity	n	10		12		14		16			
	Nominal air flow (1)	l/s	36,110		43,332		50,554		57,776			
Compressor	Type		Single screw									
	Oil charge	l	28							38		
	Quantity	n.	2									
Refrigerant circuit	Refrigerant type		R134a									
	Refrigerant charge	kg	206	207	224	226	248	260	320	348		
	Circuits	n.	2									
Power Supply	Phase/Frequency/Voltage	Hz/V	3~/50/400									

Fluid: Water; Fouling factor = 0


(1) Operation in Air to water "Cooling only" mode rated at 35°C ambient temperature, 50% R.H.; Entering water temperature 12°C, Outlet water temperature 7°C.

(2) Operation in Air to water "Heating only" mode rated at 7°C ambient temperature, 85% R.H.; Entering water temperature 40°C, Outlet water temperature 45°C.

(3) Operation in Water to water "Cooling + Heating" mode rated with water flowing on cold and hot heat exchangers determined respectively at conditions (1) and (2) - Chilled water outlet temperature 7°C, Hot water outlet temperature 45°C.

(4) Sound power level are referred to condition (1) for Cooling and (2) for Heating. The data are measured in accordance with ISO 9614 and Eurovent 8/1 for Eurovent certified units. The certification refers only to the overall sound power level.

(5) Sound pressure is calculated from the sound power level and it is for information only and not considered binding. All the above data are referred to standard units without options and are subject to change without notice.

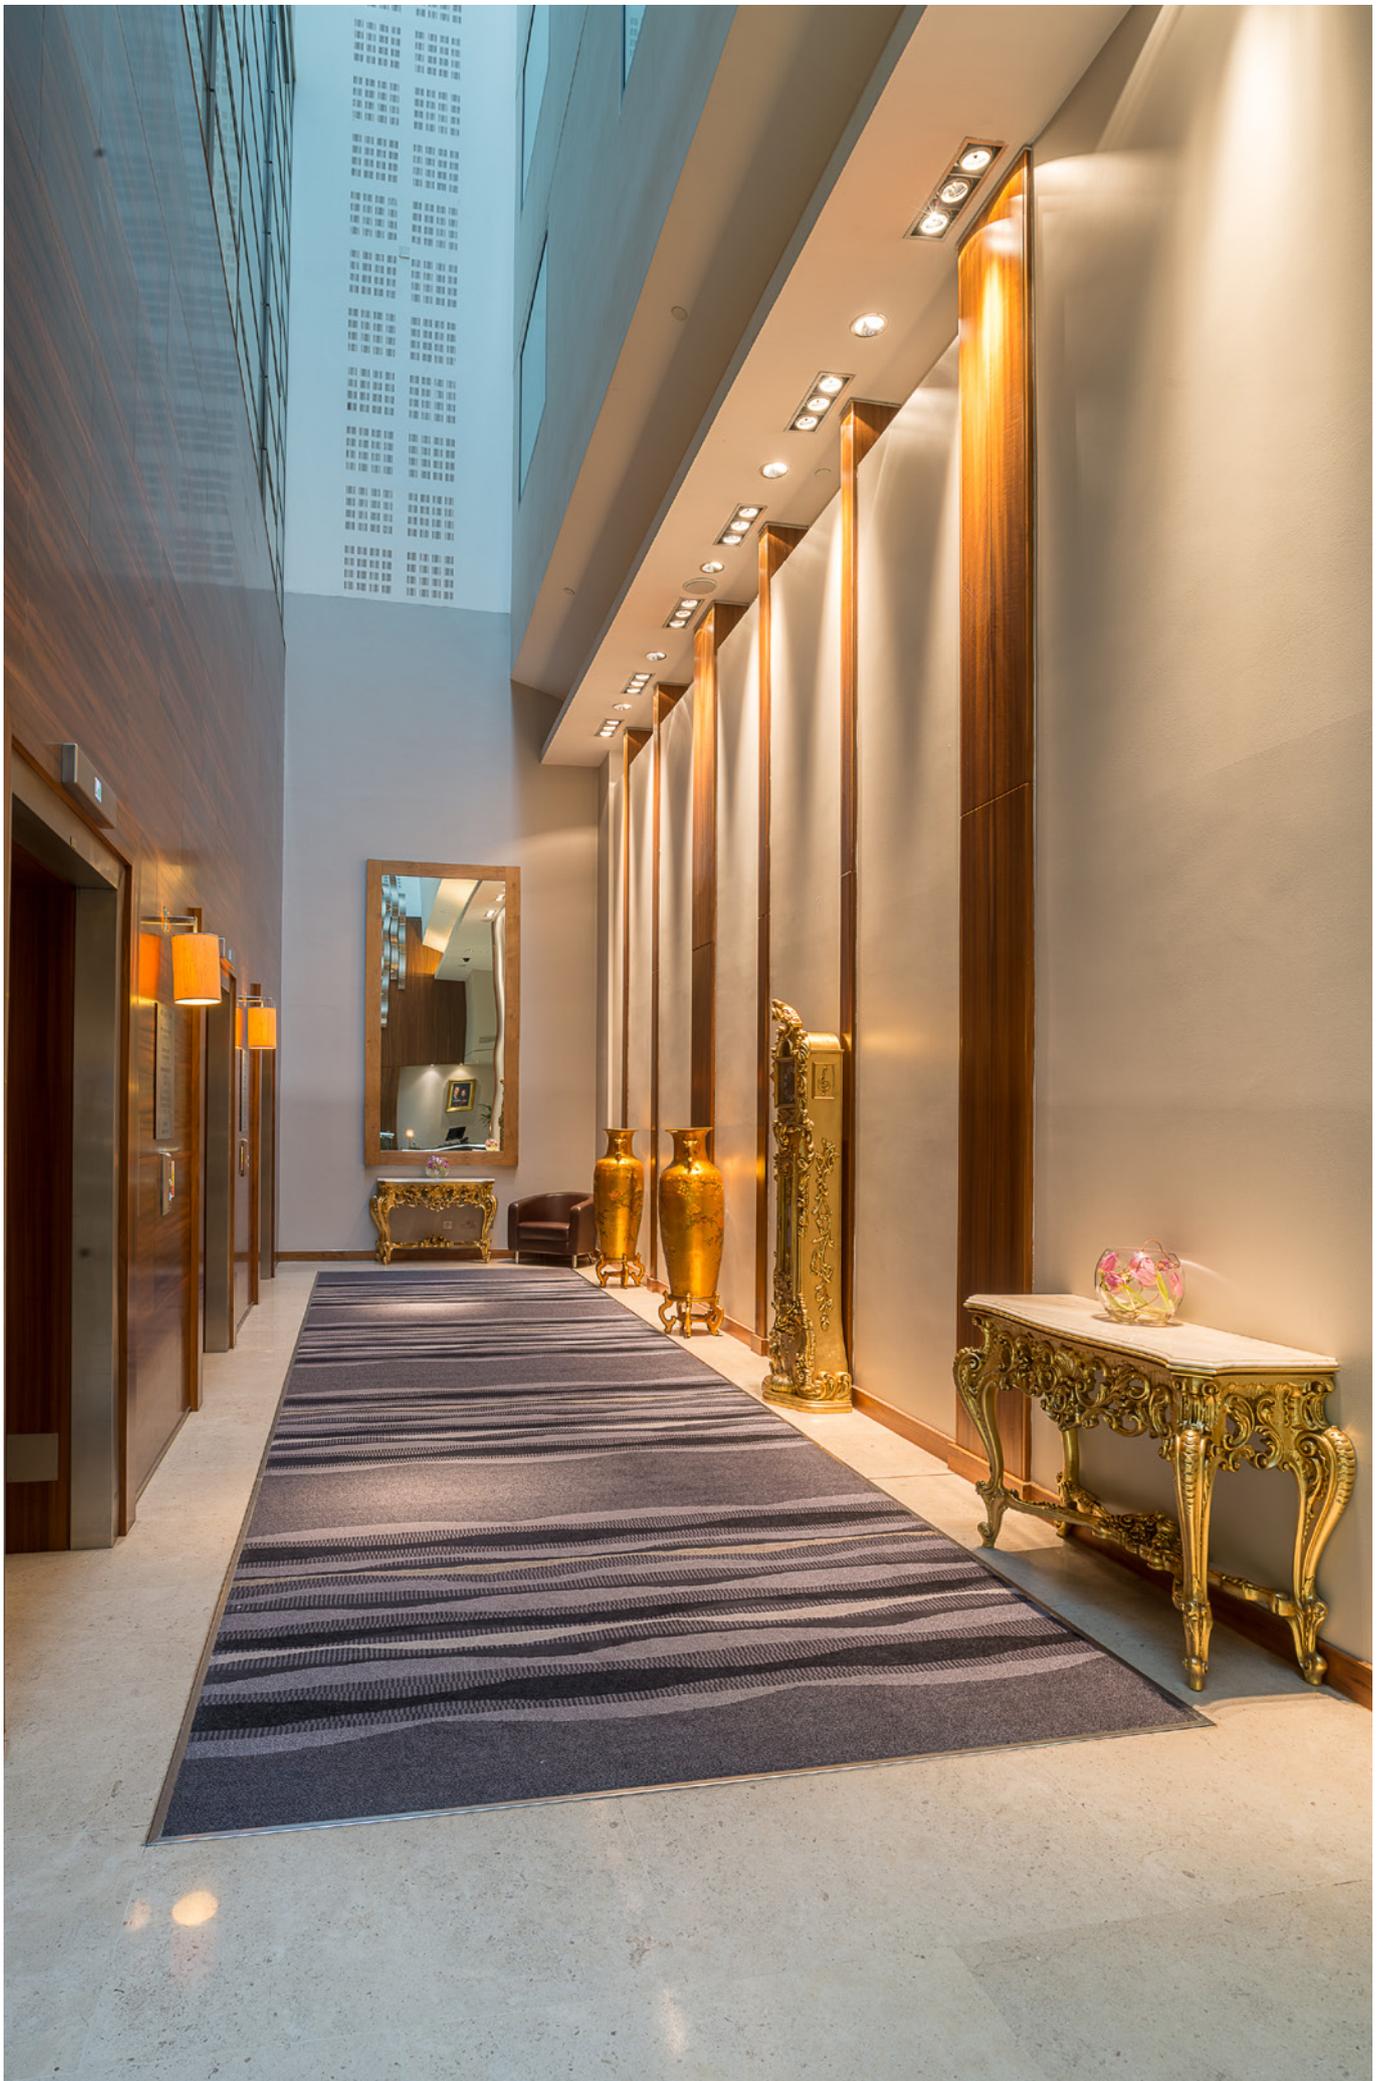

Air cooled screw condensing unit, standard efficiency, standard sound

- › One refrigerant circuit with single screw compressor
- › Compact design
- › Large operation range (ambient temperature down to -18°C)
- › Extensive option list (heat recovery option available)



More details and final information can be found by scanning or clicking the QR codes.



Cooling only		ERAD-E-SS		120	140	170	200	220	250	310	370	440	490			
Cooling capacity	Nom.	kW		121	144	165	196	219	251	309	370	435	488			
Power input	Cooling	Nom.	kW		42.1	51.2	57.7	65.6	74.2	77.0	93.8	123	148	161		
Capacity control	Method		Stepless													
	Minimum capacity		%		25.0											
EER					2.88	2.82	2.86	2.99	2.95	3.27	3.30	3.02	2.95	3.02		
Dimensions	Unit	Height	mm		2,273						2,223					
		Width	mm		1,292						2,236					
		Length	mm		2,165		3,065		3,965		3,070					
Weight	Unit	kg		1,584		1,741		1,936		2,679						
	Operation weight		kg		1,617		1,781		1,981		2,756					
Air heat exchanger	Type		High efficiency fin and tube type with integral subcooler													
Compressor	Type		Single screw compressor													
	Quantity		1													
Fan	Type		Direct propeller													
	Air flow rate	Nom.	l/s		10,924	10,576	16,386	15,865	21,848	21,153	32,772	31,729				
	Quantity				2		3		4		6					
	Speed	Cooling	Nom.	rpm		900										
Sound power level	Cooling	Nom.		dBA		92.0		93.0		94.0		95.0				
Sound pressure level	Cooling	Nom.		dBA		74.0				75.0		76.0				
Operation range	Saturated suction temp.		°C		-9~12											
	Condenser inlet temp.		°C		-18~48											
Refrigerant	Type / GWP		R-134a / 1,430													
	Circuits		Quantity		1											
Piping connections	Evaporator water inlet/outlet (OD)				76mm						139.7mm					
Unit	Maximum starting current		A		151		195		288		330		410			
	Nominal running current (RLA)	Cooling	A		72	88	98	110	125	129	158	204	244	266		
	Maximum running current		A		86	103	119	132	157	164	198	242	284	298		
Power supply	Phase/Frequency/Voltage		Hz/V		3~/50/400											

Air cooled screw condensing unit, standard efficiency, low sound

- › One refrigerant circuit with single screw compressor
- › Compact design
- › Large operation range (ambient temperature down to -18°C)
- › Extensive option list (heat recovery option available)



ERAD-E-SS/SL

MicroTech 4

More details and final information can be found by scanning or clicking the QR codes.



ERAD-E-SL

Cooling only		ERAD-E-SL		120	140	160	190	210	240	300	350	410	460	
Cooling capacity	Nom.	kW		116	137	159	187	209	243	298	352	409	462	
Power input	Cooling	Nom.	kW		42.4	52.5	57.7	66.3	73.9	78.1	91.9	122	150	167
Capacity control	Method	Stepless												
	Minimum capacity	%		25.0										
EER			2.74	2.61	2.75	2.83	3.11	3.24	2.88	2.73	2.76			
Dimensions	Unit	Height	mm		2,273						2,223			
		Width	mm		1,292						2,236			
		Length	mm		2,165		3,065		3,965		3,070			
Weight	Unit	kg		1,684		1,841		2,036		2,789				
	Operation weight	kg		1,717		1,881		2,081		2,886				
Air heat exchanger	Type	High efficiency fin and tube type with integral subcooler												
Compressor	Type	Single screw compressor												
	Quantity	1												
Fan	Type	Direct propeller												
	Air flow rate	Nom.	l/s		8,373	8,144	12,560	12,216	16,747	16,288	25,120	24,432		
	Quantity			2		3		4		6				
	Speed	Cooling	Nom.	rpm		700								
Sound power level	Cooling	Nom.	dBA		89.0		90.0		91.0		92.0		93.0	
Sound pressure level	Cooling	Nom.	dBA		71.0				73.0		74.0			
Operation range	Saturated suction temp	°C		-9~12										
	Condenser inlet temp	°C		-18~48										
Refrigerant	Type / GWP	R-134a / 1,430												
	Circuits	Quantity	1											
Piping connections	Evaporator water inlet/outlet (OD)		76mm						139.7mm					
Unit	Maximum starting current		A		151		195		288		330		410	
	Nominal running current (RLA)	Cooling	A		73	90	98	112	125	131	155	204	249	275
	Maximum running current		A		83	100	115	128	151	158	189	234	276	290
Power supply	Phase/Frequency/Voltage		Hz/V		3~/50/400									



Water cooled scroll heat pump

- › One of the most compact units on the market: 600mm x 600mm x 600mm
- › Low energy consumption
- › Low operating sound level
- › Low refrigerant volume
- › Stainless steel plate heat exchanger
- › Extension possible to 183kW
- › Easy installation and maintenance
- › Remote cooling or heating selection
- › Water/water heat pump, with water reversibility
- › Standard integrated: water filter, flow switch, air purge, pressure ports
- › Advanced μ C²SE controller for direct connection to a Modbus based BMS or to a remote user interface



EWWQ-KC

More details and final information can be found by scanning or clicking the QR codes.



EWWQ-KC

Cooling & Heating only				EWWQ-KC		014	025	033	049	064		
SEER						4.02	4.23	3.63	4.48	3.88		
Space heating	Average climate water outlet 55°C	General	SCOP			3.64	3.63	3.71	3.58	3.87		
				Seasonal space heating eff. class				A++				
Space heating	Average climate water outlet 35°C	General	SCOP			4.76	4.73	4.52	4.87	4.91		
				Seasonal space heating eff. class		A+++		A++		A+++		
Cooling capacity	Nom.			kW		12.09/13.25	19.87/23.89	28.90/30.47	39.35/47.15	57.84/61.00		
Heating capacity	Nom.			kW		14.98	27.30	34.74	54.13	69.51		
Power input	Cooling	Nom.			kW		3.20/3.74	5.70/6.11	7.30/8.43	11.4/12.03	14.6/16.41	
			Heating	Nom.			kW		3.90	7.10	8.70	14.4
Capacity control	Method								Fixed			
	Capacity control	Minimum capacity						100		50		
EER						3.237/4.20		3.254/4.18		3.429/4.16		
COP						3.84		3.83		3.98		
IPLV						4.68		4.85		4.28		
Dimensions	Unit	Height		mm				600				
		Width		mm				600				
		Depth		mm				600		1,200		
Weight	Unit				kg		68.0	132	141	257	265	
	Operation weight				kg		70/74	129/136	135/145	247/266	258/282	
Water heat exchanger - evaporator	Type								Braze plate			
	Water volume				l		1.47	1.96	2.74	4.47	5.88	
	Water flow rate	Cooling	Nom.	l/s		0.63	1.14	1.45	2.25	2.91		
				Heating	Nom.	l/s		0.88	1.6	2.07	3.2	4.13
	Water pressure drop	Cooling	Nom.			kPa		9.71/11.7	16.4/28.7	21.3/21.6	20.5/27.6	34.8/44.8
Heating				Nom.	kPa		23.70	60.20	59.60	56.70	94.60	
	Compressor	Type							Scroll compressor			
Compressor		Quantity						1		2		
	Sound power level	Cooling	Nom.	dBA		69		76		79		
Sound pressure level				Cooling	Nom.	dBA		55.2		62.1		64.6
	Operation range	Evaporator	Cooling			Min.~Max.	°CDB		-10 ~20			
Condenser				Heating	Min.~Max.		°CDB		20 ~55			
	Refrigerant	Type/GWP								R-410A/2,088.0		
Charge				kg		0.0/1.30	0.0/1.90	0.0/2.70	0.0/4.60	0.0/6.80		
Refrigerant		Circuits	Quantity					1		2		
	Piping connections			Evaporator water inlet/outlet (OD)				G1"		G1" 1/2		
Space heating	Average climate water outlet 55°C	General	SCOP			3.64	3.63	3.71	3.58	3.87		
				Seasonal space heating eff. class				A++				
Space heating	Average climate water outlet 55°C	General	Cd _h (Degradation heating)					0.9				
				Average climate water outlet 35°C				A+++		A++		A+++
Unit	Starting current	Max			A		57.4	109.3	124.3	124.8	143.6	
			Running current	Cooling	Nom.	A		6.0/6.57	9.0/10.5	13.0/14.1	19.0/20.9	26.0/28.1
						Running current	Max	A		9.16	15.5/15.53	19.3/19.33
Power supply	Phase/Frequency/Voltage		Hz/V					3N~/50/400				

Cooling: EW 12°C; LW 7°C; ambient conditions: 35°CDB | Cooling: EW 23°C; LW 18°C; ambient conditions: 35°CDB | Condition: Ta DB/WB 7°C/6°C - LWC 35°C (DT = 5°C) | Condition: Ta DB/WB 7°C/6°C - LWC 45°C (DT=5°C) | According to EN14825 | Depends on operation mode, refer to installation manual. | For more details, see operation range drawing



Water cooled multi-scroll chiller reversing on refrigerant side, standard efficiency, standard sound

- › Single refrigerant circuit (2 scroll compressors) with single evaporator
- › Heat pump version with reversibility on refrigerant side available, ideal for geothermal applications
- › Compact design to allow easy indoor installation or retrofit operations
- › Conceived for stacked installation of two single circuit units to reduce the footprint
- › High efficiency and reliable scroll compressor
- › High flexibility for a wide variety of applications
- › Allows sequencing control (up to 4 units) without any external device
- › Stainless steel plate heat exchanger
- › Pump (low 100 kPa and high 200 kPa lift) available for evaporator and condenser
- › MicroTech 4 controller with superior control logic and easy interface



More details and final information can be found by scanning or clicking the QR codes.



Heating & Cooling				EWHQ-G-SS												
				100	120	130	150	160	190	210	240	270	340	400		
Cooling capacity	Nom.			kW	87.3	100.0	111	127	141	160	181	208	232	291	352	
Heating capacity	Nom.			kW	112	128	144	162	179	205	233	266	299	375	454	
Capacity control	Method	Step														
	Minimum capacity			%	50.0	43.0	50.0	44.0	50.0	45.0	50.0	43.0	50.0	40.0	50.0	
Power input	Cooling	Nom.			kW	22.4	25.3	28.5	32.0	35.6	41.1	46.0	53.3	59.1	73.7	88.4
	Heating	Nom.			kW	27.0	30.9	35.2	39.3	43.6	50.4	56.6	64.7	72.2	90.3	109
EER						3.90	3.95	3.91	3.96	3.95	3.90	3.93	3.90	3.92	3.95	3.98
COP						4.15	4.16	4.09	4.12	4.11	4.07	4.11	4.10	4.14	4.16	4.18
ESEER						4.70	4.84	4.65	4.86	4.80	4.89	4.86	4.83	4.79	4.90	4.83
IPLV						6.02	6.14	5.66	5.84	5.73	5.84	5.81	5.87	5.71	5.86	5.79
Dimensions	Unit	HeightxWidthxLength		mm	1,066x928x2,432			1,066x928x2,264			1,066x928x2,432			1,186x928x2,432		
Weight	Unit			kg	519	608	728	770	808	838	880	930	941	1,090	1,203	
	Operation weight			kg	558	654	782	830	873	908	995	1,019	1,031	1,202	1,334	
Water heat exchanger - evaporator	Type	Plate heat exchanger														
	Water flow rate	Cooling	Nom.	l/s	4.2	4.8	5.3	6.1	6.7	7.7	8.7	10.0	11.1	13.9	16.9	
		Heating	Nom.	l/s	4.1	4.7	5.2	5.9	6.5	7.4	8.5	9.6	10.9	13.7	16.6	
	Water pressure drop	Cooling	Nom.	kPa	44		35	30	29	31	33	31	38	42	43	
Heating		Nom.	kPa	42		33	28	27	29	32	29	37	41	42		
Water heat exchanger - condenser	Type	Plate heat exchanger														
	Water volume			l	6	8	10	12	13	15	17		27	34		
	Water flow rate	Cooling	Nom.	l/s	5.2	6.0	6.7	7.7	8.5	9.7	10.9	13.7	13.9	17.4	21.1	
		Heating	Nom.	l/s	5.4	6.2	7.0	7.8	8.7	9.9	11.2	12.5	14.3	18.0	21.8	
Water pressure drop	Cooling	Nom.	kPa	69		55	49	48	51	54	32	39	66	69		
	Heating	Nom.	kPa	73		59	51	50	53	57	33	42	70	73		
Compressor	Type	Scroll compressor														
	Quantity	2														
Sound power level	Cooling	Nom.			dB(A)	80.0	83.0	85.0	87.0	88.0			90.0	92.0	93.0	
	Heating	Nom.			dB(A)	64.0	67.0	69.0	70.0	72.0			74.0	76.0	77.0	
Operation range	Evaporator	Cooling	Min.~Max.	°CDB	-8~-15											
		Heating	Min.~Max.	°CDB	-8~-15											
	Condenser	Cooling	Min.~Max.	°CDB	25~55											
		Heating	Min.~Max.	°CDB	25~55											
Refrigerant	Type/GWP	R-410A/2,087.5														
	Circuits	Quantity	1													
Refrigerant charge			kg/TCO ₂ Eq	9.0/18.8		10.0/20.9		13.0/27.1	11.0/23.0	13.0/27.1	15.0/31.3		19.0/39.7			
Piping connections	Evaporator water inlet/outlet (OD)			1" 1/2				2" 1/2				3"				
	Condenser water inlet/outlet (OD)			1" 1/2				2" 1/2				3"				
Power supply	Phase/Frequency/Voltage			3~/50/400												
Unit	Starting current	Max		A	204	255	261	308	316	354	368	466	481	640	677	
		Running current	Cooling	Nom.	A	43	46	50	56	63	71	78	88	97	123	148
	Heating		Nom.	A	59	66	72	80	88	102	116	131	145	183	221	

Water cooled multi-scroll chiller, standard efficiency, standard sound

- › Single refrigerant circuit (2 scroll compressors) with single evaporator
- › Heat pump version available
- › Compact design to allow easy indoor installation or retrofit operations
- › Conceived for stacked installation of two single circuit units to reduce the footprint
- › High efficiency and reliable scroll compressor
- › High flexibility for a wide variety of applications
- › Allows sequencing control (up to 4 units) without any external device
- › Stainless steel plate heat exchanger
- › Pump (low 100 kPa and high 200 kPa lift) available for evaporator and condenser
- › MicroTech 4 controller with superior control logic and easy interface



More details and final information can be found by scanning or clicking the QR codes.



Cooling Only				EWQ-G-SS												
				090	100	120	130	150	170	190	210	240	300	360		
Space cooling	A Condition 35°C Pdc			kW	93.7	105.6	119	135.9	150	172.1	193.8	220.7	246.1	314.3	370.4	
	ηs,c			%	209.08	215.32	233.52	227.68	233.04	233.36	220.32	235.56	231.84	236.64	211.36	
SEER					5.427	5.583	6.038	5.892	6.026	6.034	5.708	6.089	5.996	6.116	5.484	
Cooling capacity	Nom.			kW	93.7	105.6	119	135.9	150	172.1	193.8	220.7	246.1	314.3	370.4	
Power input	Cooling	Nom.		kW	21.3	24	26.9	30.5	33.9	38.9	43.8	50.74	56.1	70.2	84	
Capacity control	Method			Fixed												
	Minimum capacity			%	50	43	50	44	50	45	50	43	50	40	50	
EER					4.399	4.4	4.424	4.456	4.425	4.424	4.425	4.349	4.387	4.477	4.41	
ESEER					5.51	5.52	5.51	5.53	5.51	5.53	5.52					
IPLV					6.71	6.79	6.22	6.36	6.22	6.32	6.3	6.31	6.1	6.28	6.16	
Dimensions	Unit	Height	mm	1,066												
		Width	mm	928												
		Length	mm	2,432			2,264			2,432						
Weight	Unit			kg	516	606	728	762	795	832	871	921	934	1,083	1,181	
	Operation weight			kg	554.9	652.4	781.6	821.4	859	901.4	945.9	1,009.6	1,023.2	1,194.7	1,311.1	
Water heat exchanger - evaporator	Type			Plate heat exchanger												
	Water volume			l	6	8	10	12	13	15	17	27	34			
	Water flow rate Nom.			l/s	4.5	5.07	5.7	6.51	7.18	8.24	9.28	10.57	11.79	15.06	17.74	
Water heat exchanger - condenser	Type			Plate heat exchanger												
	Water volume			l	6	8	10	12	13	15	17	27	34			
	Water flow rate Nom.			l/s	5.52	6.23	7.05	8.04	8.87	10.17	11.43	13.02	14.53	18.46	21.81	
Compressor	Type			Driven vapour compression												
	Quantity				2											
Sound power level	Cooling	Nom.		dBA	80.0	83.0	85.0	87.0	88.0			90.0	92.0	93.0		
Sound pressure level	Cooling	Nom.		dBA	64.0	67.0	69.0	70.0	72.0			74.0	76.0		77.0	
Operation range	Evaporator	Cooling	Min.~Max.	°CDB	-10~-15											
		Heating	Min.~Max.	°CDB	-10~-15											
	Condenser	Cooling	Min.~Max.	°CDB	25~55											
		Heating	Min.~Max.	°CDB	25~55											
Refrigerant	Type/GWP			R-410A/2,087.5												
	Charge			kg	10	11			12	15	16	17	19	20		
	Circuits			Quantity	1											
Refrigerant charge	TCO2Eq			20.88	22.96			25.05	31.31	33.40	35.49	39.66	41.75			
Piping connections	Evaporator water inlet/outlet (OD)			1" 1/2				2" 1/2				3"				
	Condenser water inlet/outlet (OD)			1" 1/2				2" 1/2				3"				
Unit	Starting current Max			A	204	255	261	308	316	354	368	466	481	640	677	
	Running current	Cooling	Nom.	A	42	45	48	54	61	68	76	86	95	118	143	
		Max		A	59	66	72	80	88	102	116	131	145	183	221	
Power supply	Phase/Frequency/Voltage			Hz/V	3~/50/400											

Water cooled multi-scroll chiller, standard efficiency, standard sound

- › Dual refrigerant circuit (4 scroll compressors) with single evaporator
- › Heat pump version available
- › Compact design to allow easy indoor installation or retrofit operations
- › High efficiency and reliable scroll compressor
- › Stainless steel plate heat exchanger
- › High flexibility for a wide variety of applications
- › Allows sequencing control (up to 4 units) without any external device
- › Pump (low 100 kPa and high 200 kPa lift) available for evaporator and condenser
- › MicroTech 4 controller with superior control logic and easy interface



More details and final information can be found by scanning or clicking the QR codes.



Cooling only/Heating only				EWVQ-L-SS	180	205	230	260	290	330	380
Space cooling	A Condition 35°C Pdc			kW	187.4	215.1	244.3	272.6	303.2	344.5	386.8
	η _{s,c}			%	211.72	222.72	232.76	230.32	236.76	233.32	224.84
SEER					5.493	5.768	6.019	5.958	6.119	6.033	5.821
Cooling capacity	Nom.			kW	187.4	215.1	244.3	272.6	303.2	344.5	386.8
Power input	Cooling	Nom.		kW	41.7	47.3	53.1	60.2	67.1	77.1	87
Capacity control	Method				Fixed						
	Minimum capacity			%	25	21	25	22	25	23	25
EER					4.494	4.548	4.601	4.528	4.519	4.468	4.446
ESEER					5.54		5.52	5.53	5.54	5.53	5.54
IPLV					6.77	6.84	6.35	6.38	6.31	6.32	6.36
Dimensions	Unit	Height		mm	1,970						
		Width		mm	928						
		Length		mm	2,801						
Weight	Unit			kg	877	1,062	1,285	1,347	1,439	1,498	1,559
		Operation weight		kg	957	1,156	1,401	1,469	1,575	1,641	1,723
Water heat exchanger - evaporator	Type				Plate heat exchanger						
	Water volume			l	35	41	53		65		76
	Water flow rate Nom.			l/s	8.97	10.29	11.69	13.04	14.5	16.48	18.51
	Water pressure drop	Cooling	Nom.	kPa	28	27.6	22.6	28	25.1	32.2	31.9
Water heat exchanger - condenser	Type				Plate heat exchanger						
	Water volume			l	19	22	29		35		41
	Water flow rate Nom.			l/s	11.02	12.66	14.4	16.12	17.9	20.38	22.8
	Water pressure drop	Cooling	Nom.	kPa	72	73	61	49	50	51	55
Compressor	Type				Driven vapour compression						
	Quantity				4						
Sound power level	Cooling	Nom.		dB(A)	83.0	86.0	88.0	90.0	91.0		
	Sound pressure level	Cooling	Nom.		dB(A)	65.0	68.0	70.0	72.0	74.0	73.0
Operation range	Evaporator	Cooling	Min.~Max.		°CDB	-10~-15					
		Heating	Min.~Max.		°CDB	-10~-15					
	Condenser	Cooling	Min.~Max.		°CDB	25~55					
		Heating	Min.~Max.		°CDB	25~55					
Refrigerant	Type/GWP				R-410A/2,087.5						
	Charge			kg	20		22		24		30
	Circuits	Quantity			2						
Refrigerant charge				kg/TCO ₂ Eq	10.0/20.9		11.0/23.0		12.0/25.1		15.0/31.3
Piping connections	Evaporator water inlet/outlet (OD)				3"						
	Condenser water inlet/outlet (OD)				1" 1/2		2" 1/2				
Unit	Starting current	Max		A	263	320	333	388	403	456	484
		Running current	Cooling	Nom.	A	83	89	96	109	121	137
	Max		A	118	131	144	160	175	205	232	
Power supply	Phase/Frequency/Voltage			Hz/V	3~/50/400						

performances according to CSS software 10.27

Water to water screw heat pump, standard efficiency, standard sound

- › Compact design to allow easy indoor installation or retrofit operations
- › Daikin semi-hermetic single screw stepless compressor
- › High energy efficiency both at full and part load conditions
- › Chilled water temperatures down to -10°C on standard unit
- › Optimised for use with R-134a
- › MicroTech 4 controller with superior control logic and easy interface



More details and final information can be found by scanning or clicking the QR codes.



Cooling & Heating				EWWD-J-SS	120	140	150	180	210	250	280
Space heating	Average climate water outlet 55°C	General	SCOP		4.03	4.11	4.16	4.17	4.17	4.23	3.83
Cooling capacity	Nom.			kW	119.7	145.7	154.3	177.3	207.3	255.3	284.1
Heating capacity	Nom.			kW	144.2	175.4	189.8	217.8	252.2	308.4	347.4
Power input	Cooling	Nom.		kW	28.0	34.0	39.5	45.3	50.4	59.9	70.0
Capacity control	Method				Stepless						
	Minimum capacity			%	25.0						
EER					4.28	4.28	3.91	3.92	4.11	4.26	4.06
COP					5.20		4.84	4.85	5.04	5.17	4.98
IPLV					5.18	5.06		5.05	5.16	5.70	4.88
Dimensions	Unit	Height		mm	1,020						
		Width		mm	913						
		Length		mm	2,684						
Weight	Unit			kg	1,177	1,233	1,334	1,366	1,416	1,600	1,607
		Operation weight		kg	1,211	1,276	1,378	1,415	1,473	1,663	1,675
Water heat exchanger - evaporator	Type				Plate heat exchanger						
	Water volume			l	14	18	14	17	20	26	
	Water flow rate	Cooling	Nom.	l/s	5.7	7.0	7.4	8.5	9.9	12.2	13.6
	Water flow rate	Heating	Nom.	l/s	9.3	11.3	12	13.8	16.1	19.8	22.1
	Water pressure drop	Cooling	Nom.	kPa	15	14	43	40	35	28	34
	Heating	Nom.	kPa	36	34	103	96	85	68	82	
Water heat exchanger - condenser	Type				Single pass shell and tube						
	Water volume			l	20		23	25	29		32
	Water flow rate	Cooling	Nom.	l/s	7.1	8.64	9.32	10.7	12.4	15.2	17.0
	Water flow rate	Heating	Nom.	l/s	6.93	8.44	9.13	10.5	12.1	14.8	16.7
	Water pressure drop	Cooling	Nom.	kPa	20	13	11		15	17	27
	Heating	Nom.	kPa	19	12	11		15	16	26	
Compressor	Type				Single screw compressor						
	Quantity				1						
Sound power level	Cooling	Nom.		dB(A)	89						
Sound pressure level	Cooling	Nom.		dB(A)	79						
Operation range	Evaporator	Cooling	Min.~Max.	°CDB	-10~-15						
	Condenser	Cooling	Min.~Max.	°CDB	23~60						
Refrigerant	Type/GWP				R-134a/1,430						
	Circuits	Quantity			1						
Refrigerant charge	Per circuit			kg/TCO2Eq	18.0/25.7	35.0/50.1	34.0/48.6	37.0/52.9		38.0/54.3	
Piping connections				mm	76.2						
Piping connections	Condenser water inlet/outlet (OD)				2" 1/2	4"					
Unit	Starting current	Max		A	153		197			290	
	Running current	Cooling	Nom.	A	48	57	67	74	83	97	109
		Max		A	85	103	114	130	154	178	201
Power supply	Phase/Frequency/Voltage			Hz/V	3~/50/400						


performances according to CSS software 10.34

Fluid: Water; Fouling factor = 0 m²/C/W

Cooling performances: evaporator 12.0/7.0°C, condenser 30.0/35.0°C; Heating performances (Low temperature application): evaporator 10.0/7.0°C, condenser 30.0/35.0°C.

Water to water screw heat pump, standard efficiency, standard sound

- > HFO R-1234ze(E) Refrigerant with Ozone Depletion Potential equal to zero and extremely low Global Warming Potential
- > Daikin semi-hermetic single screw compressor
- > Direct expansion plate to plate evaporator
- > Shell and tube condenser
- > Silver efficiency and standard sound
- > Upgrade to new MicroTech 4 controller

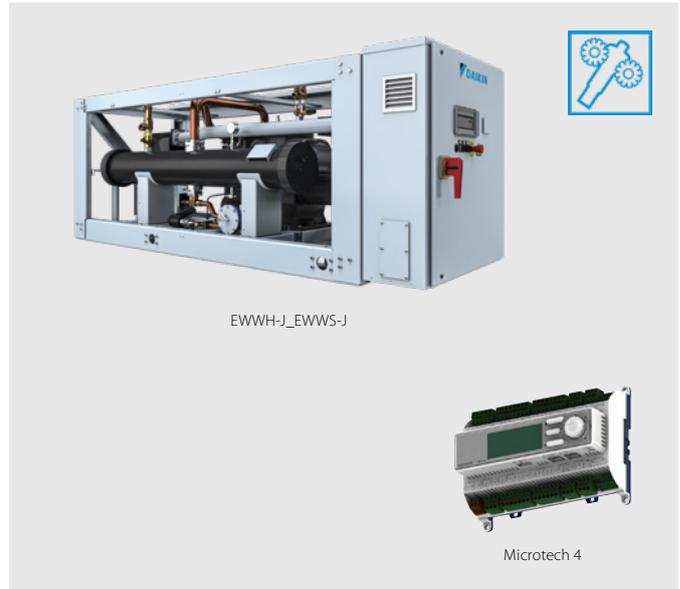

More details and final information can be found by scanning or clicking the QR codes.



				EWWH-J-SS	090	110	120	130	150	180	200	
Space heating	Average climate water outlet 55°C	General	SCOP		3.91	3.92	3.78	3.77	3.80	3.90	3.84	
Cooling capacity	Nom.		kW	88.77	107.1	115.1	133.5	150.1	181.6	200.6		
Heating capacity	Nom.		kW	107.2	129.2	140.9	162.3	182.2	220.5	245		
Power input	Cooling	Nom.	kW	30	36.3	41.7	47.8	54.2	65.7	74.4		
Capacity control	Method			Stepless								
	Minimum capacity		%	25								
EER				3.85	3.75	3.72	3.78	3.82	3.67	3.66		
COP				4.69	4.57	4.52	4.59	4.67	4.46	4.46		
IPLV				4.1	4.11	4.09	4.11	4.12	4.64	4.59		
Dimensions	Unit	Height	mm	1,020								
		Width	mm	913								
		Length	mm	2,684								
Weight	Unit		kg	1,177	1,233	1,334	1,366	1,416	1,600	1,607		
		Operation weight	kg	1,211	1,276	1,378	1,415	1,473	1,663	1,675		
Water heat exchanger - evaporator	Type			Plate heat exchanger								
	Water volume		l	14	18	14	17	20	26			
	Water flow rate	Cooling	Nom.	l/s	4.24	5.11	5.49	6.37	7.16	8.66	9.57	
		Heating	Nom.	l/s	6.8	8.3	8.9	10.2	11.8	13.9	15.4	
	Water pressure drop	Cooling	Nom.	kPa	10.7	10.9	19.3	19.3	17.8	16.8	20.1	
Heating		Nom.	kPa	24.9	25.9	45.6	44.9	43.7	39.2	47.4		
Water heat exchanger - condenser	Type			Single pass shell and tube								
	Water volume		l	20	20	23	25	29		32		
	Water flow rate	Cooling	Nom.	l/s	5.18	6.31	6.79	7.84	9.1	10.7	11.9	
		Heating	Nom.	l/s	6.77	8.27	8.86	10.2	11.8	13.9	15.4	
	Water pressure drop	Cooling	Nom.	kPa	9.1	9.7	8.7	9.1	9.3	12.3	12.1	
Heating		Nom.	kPa	24.9	25.9	45.6	44.9	43.7	39.2	47.4		
Compressor	Type			Single screw compressor								
	Quantity			1								
Sound power level	Cooling	Nom.	dB(A)	89								
Sound pressure level	Cooling	Nom.	dB(A)	79								
Refrigerant	Type			R-1234(ze)								
	Charge		kg	18	35	34	37		38			
	Circuits	Quantity		1								
Piping connections			mm	76.2								
	Condenser water inlet/outlet		inch	2" 1/2		4						
Unit	Starting current	Max	A	153				197		290		
		Running current	Cooling	Nom.	A	39	44	55	60	65	76	84
	Max	A	75	90	100	114	143	158	178			
Power supply	Phase/Frequency/Voltage		Hz/V	3~/50/400								


performances according to CSS software 10.34

Fluid: Water; Fouling factor = 0 m²C/W

Cooling performances: evaporator 12.0/7.0°C, condenser 30.0/35.0°C; Heating performances (Low temperature application): evaporator 10.0/7.0°C, condenser 30.0/35.0°C.

Water to water screw heat pump, standard efficiency, standard sound

- › Refrigerant R-513A
- › Daikin semi-hermetic single screw compressor
- › Direct expansion plate to plate evaporator
- › Shell and tube condenser
- › Silver efficiency and standard sound
- › Upgrade to new MicroTech 4 controller

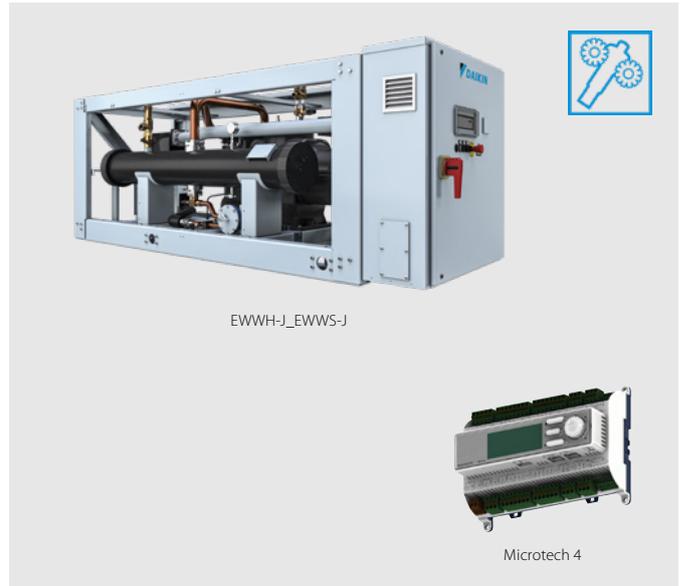

EWWS-J_EWWS-J

Microtech 4

More details and final information can be found by scanning or clicking the QR codes.



EWWS-J-SS

				EWWS-J-SS		120	140	150	180	210	240	270	
Space heating	Average climate water outlet 55°C	General	SCOP		3.63	3.54	3.56	3.59	3.62	3.54	3.58		
Cooling capacity	Nom.			kW	115.2	136.3	154.7	180.6	207.3	241	272.2		
Heating capacity	Nom.			kW	141.7	167.5	191.3	223	256.9	297	338.2		
Power input	Cooling	Nom.		kW	30	36.3	41.7	47.8	54.2	65.7	74.4		
Capacity control	Method				Stepless								
	Minimum capacity			%	25								
EER					3.85	3.75	3.72	3.78	3.82	3.67	3.66		
COP					4.69	4.57	4.52	4.59	4.67	4.46			
IPLV					4.1	4.11	4.09	4.11	4.12	4.64	4.59		
Dimensions	Unit	Height		mm	1,020								
		Width		mm	913								
		Length		mm	2,684								
Weight	Unit			kg	1,177	1,233	1,334	1,366	1,416	1,600	1,607		
	Operation weight			kg	1,211	1,276	1,378	1,415	1,473	1,663	1,675		
Water heat exchanger - evaporator	Type				Plate heat exchanger								
	Water volume			l	14	18	14	17	20	26			
	Water flow rate	Cooling	Nom.		l/s	5.5	6.5	7.38	8.62	9.89	11.5	13	
			Heating	Nom.	l/s	8.8	10.8	12.1	13.8	15.5	19	21.1	
	Water pressure drop	Cooling	Nom.		kPa	17.1	16.8	32.8	33.4	31.8	27.9	34.8	
Heating			Nom.	kPa	40.1	41.7	79.4	78.1	71.5	68.9	83.3		
Water heat exchanger - condenser	Type				Single pass shell and tube								
	Water volume			l	20	20	23	25	29		32		
	Water flow rate	Cooling	Nom.		l/s	6.87	8.38	9.39	10.8	12.1	14.8	16.5	
			Heating	Nom.	l/s	6.72	8.2	9.2	10.6	11.9	14.5	16.2	
	Water pressure drop	Cooling	Nom.		kPa	15	16.1	15.4	15.9	15.4	22	21.6	
Heating			Nom.	kPa	14.4	15.5	14.8	15.3	14.8	21.2	20.8		
Compressor	Type				Single screw compressor								
	Quantity				1								
Sound power level	Cooling	Nom.		dBA	89								
Sound pressure level	Cooling	Nom.		dBA	79								
Refrigerant	Type				R-513A								
	Charge			kg	18	35	34	37		38			
	Circuits	Quantity			1								
Piping connections				mm	76.2								
Piping connections	Condenser water inlet/outlet			inch	2" 1/2		4						
Unit	Starting current	Max		A	154			198		291			
		Running current	Cooling	Nom.	A	50	60	70	78	87	104	117	
	Max			A	81	96	108	122	141	164	185		
Power supply	Phase/Frequency/Voltage			Hz/V	3~/50/400								

performances according to CSS software 10.34

Fluid: Water; Fouling factor = 0 m²C/W

Cooling performances: evaporator 12.0/7.0°C, condenser 30.0/35.0°C; Heating performances (Low temperature application): evaporator 10.0/7.0°C, condenser 30.0/35.0°C.

The highest peak in chiller technology

The VZ chiller series were developed and manufactured to answer the growing market demands on high efficient chiller series. Thanks to the continuous evolution in components' technology, we are the first to reach the highest peak in chiller efficiency and technology.

EWV(H)(D)(S)-VZ at a glance

Single compressor

440kW - 1,050kW with R134a or R513A
330kW - 790kW with R1234ze



Full inverter water cooled chiller



Dual compressor & dual circuit unit

1,170kW - 2,070kW with R134a or R513A
865kW - 1,540kW with R1234ze

of everything:
2 compressors,
2 expansion valves,
2 condensers,...



New condenser design with integral oil separator

High efficient flooded heat exchangers



Highest efficiency in the market in its category



Unique Daikin single screw compressor technology



Performance monitoring

With MT4, advanced algorithm implementation in the unit controller are possible, such as the **Performance Monitoring** (Option 186). This sensor-less algorithm calculates the unit cooling capacity by using refrigerant pressure and temperature readings. Electrical power is calculated either from compressor VFD power and fan, or directly measured through optional energy meter. As a standard(*), **no extra-hardware is required**.

(*) For TZ-B units an additional sub-cooling temperature sensor is required.

Why choose EWW(H)(D)(S)-VZ at a glance chiller series?

1 Top class efficiency

Thanks to:

- › New generation Daikin inverter screw compressors
- › New generation high efficiency heat exchangers
- › Variable volume ratio technology
- › Optimized refrigerant circuit design

2 Compact unit: 40% footprint reduction

Thanks to:

- › New single pass condenser technology
- › New integrated oil separator technology
- › Optional knock down panel which reduces the unit width

3 Application flexibility: widest operating envelope in its range

4 Connectivity: Daikin on site cloud platform

5 Future readiness: Choose for today's best solution and be ready for the future!



Supporting tools

Product video



Check on



www.youtube.com/DaikinEurope



Marketing material

All marketing material can be downloaded from the business portal.
Asset finder > Campaign > VZ chiller series



Product profile

Want to know more about this product?


Have a look at our website and download the product profile:

www.daikineurope.com/vzchillerseries



Water cooled screw inverter chiller, standard efficiency, standard sound

- › Optimized energy efficiency both at full and part load conditions
- › Compact footprint through stacked heat exchanger lay-out
- › Heat pump version with reversibility on water side (up to 65°C hot water production)
- › Multiple options available: sound proof cabinet, rapid restart, removable electrical panel, etc. to adapt the unit to your specific application and need
- › Thanks to a large operating envelope, the unit is suitable for all possible process and comfort applications
- › High efficient flooded type heat exchanger allowing maximum unit performances
- › One or two truly independent refrigerant circuits for outstanding reliability

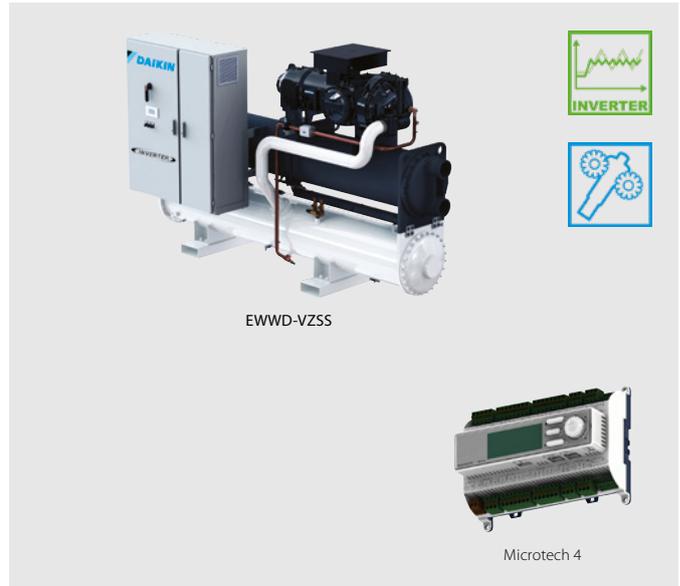

More details and final information can be found by scanning or clicking the QR codes.




EWWD-VZSS

Cooling only/Heating only				EWWD-VZSS											
				600	700	760	890	C10	C12	C13	C14	C16	C17	C19	C21
Space cooling	A Condition Pdc (35°C - 27/19)			kW											
	ηs,c			%											
SEER				8.7											
Cooling capacity				Nom. kW											
Power input				Cooling Nom. kW											
Capacity control				Method											
				Minimum capacity											
				%											
EER				5.5 5.31 5.3 5.52 5.29 5.07 5.11 5 4.93 5.08 4.93 5.08											
IPLV				9.43 9.36 9.4 9.37 9.4 9.52 9.56 9.57 9.36 9.7 9.38 9.65											
Dimensions				Unit Height mm											
				Width mm											
				Length mm											
Weight				Unit kg											
				Operation weight kg											
Water heat exchanger - evaporator				Type											
				Water volume l											
				Water flow rate Cooling Nom. l/s											
				Water pressure drop Cooling Nom. kPa											
Water heat exchanger - condenser				Type											
				Water volume l											
				Water flow rate Cooling Nom. l/s											
				Water pressure drop Cooling Nom. kPa											
Compressor				Type											
				Quantity											
Sound power level				Cooling Nom. dBA											
Sound pressure level				Cooling Nom. dBA											
Operation range				Evaporator Min.-Max. °CDB											
				Condenser Min.-Max. °CDB											
Refrigerant				Type/GWP											
				Charge kg											
				Circuits Quantity											
Piping connections				mm											
				Condenser water inlet/outlet (OD)											
				Running current Cooling Nom. A											
Unit				Running current Max. A											
Power supply				Phase/Frequency/Voltage Hz/V											

performances according to CSS software 10.33

Water cooled screw inverter chiller, high efficiency, standard sound

- > High energy efficiency both at full and part load conditions
- > Compact footprint through stacked heat exchanger lay-out
- > Heat pump version with reversibility on water side (up to 65°C hot water production)
- > Multiple options available: sound proof cabinet, rapid restart, removable electrical panel, etc. to adapt the unit to your specific application and need
- > Thanks to a large operating envelope, the unit is suitable for all possible process and comfort applications
- > High efficient flooded type heat exchanger allowing maximum unit performances
- > One or two truly independent refrigerant circuits for outstanding reliability

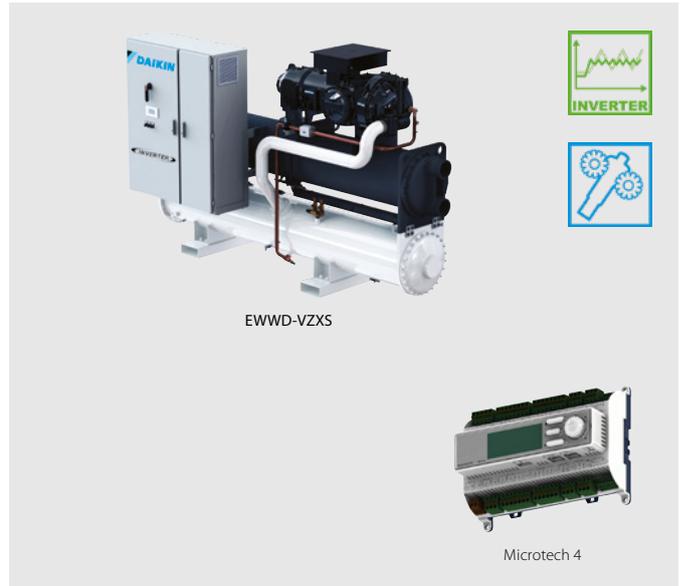

More details and final information can be found by scanning or clicking the QR codes.




EWWD-VZXS

Cooling only/Heating only		EWWD-VZXS																											
		450	500	610	710	800	900	C11	C12	C13	C14	C16	C17	C19	C21														
Space cooling	A Condition Pdc (35°C - 27/19)	kW														448.83	500.51	612.77	713.11	793.52	901.21	1,053.02	1,194.03	1,305.01	1,406.98	1,593.03	1,748.03	1,912.01	2,074.02
	ηs,c	%														324.8	329.2	347.2	350	345.6	337.6	344.4	347.6	342.4	348	347.2	347.6	337.2	344.4
SEER																8.32	8.43	8.88	8.95	8.84	8.64	8.81	8.89	8.76	8.9	8.88	8.89	8.63	8.81
Cooling capacity	Nom.	kW														449	501	613	713	794	901	1,053	1,194	1,305	1,407	1,593	1,748	1,912	2,074
Power input	Cooling	kW														81.2	89.7	108	128	146	159	192	221	244	262	296	329	365	394
	Nom.																												
Capacity control	Method															Variable													
	Minimum capacity	%														20						10							
EER																5.53	5.58	5.64	5.54	5.43	5.67	5.46	5.38	5.34	5.36	5.38	5.31	5.23	5.25
IPLV																9.42	9.59	9.52	9.66	9.64	9.48	9.58	9.66	9.67	9.76	9.74	9.82	9.68	9.7
Dimensions	Unit	Height	mm														2,135	2,123	2,235	2,487	2,296	2,301	2,350	2,500	2,469	2,493			
		Width	mm														1,178	1,179	1,189	1,303	1,484	1,639	1,579	1,580	1,610	1,704	1,769		
		Length	mm														3,722	3,750	3,690	3,822	4,792	4,508	4,750	4,874					
Weight	Unit	kg														2,968	2,911	3,102	3,470	3,451	4,257	4,552	5,860	6,240	6,520	6,920	7,530	7,790	8,670
	Operation weight	kg														3,098	3,006	3,274	3,648	3,611	4,518	4,860	6,370	6,760	7,130	7,530	8,300	8,560	9,630
Water heat exchanger - evaporator	Type															Flooded shell and tube													
	Water volume	l		70	88	136	134	168	199	270	320	380	480																
	Water flow rate	Cooling	Nom.	l/s		21.5	24	29.3	34.1	38	43.2	50.4	57.1	62.5	67.3	76.3	83.6	91.4	99.2										
	Water pressure drop	Cooling	Nom.	kPa		89	63	59	63	55	67	59	52	62	52	67	58	49	58										
Water heat exchanger - condenser	Type															Shell and tube													
	Water volume	l		81	92	126	145	126	217	241	240	250	290	390	290	480													
	Water flow rate	Cooling	Nom.	l/s		26.4	29.4	35.3	41.2	46.1	52	61	69.8	76.3	82.2	93.2	102	112	121										
	Water pressure drop	Cooling	Nom.	kPa		31	28	22	20	24	25	28	21	32	27	37	28												
Compressor	Type															Driven vapour compressor													
	Quantity															1					2								
Sound power level	Cooling	Nom.	dBA		97	99	101	105	107	106	107	108	109	110															
	Sound pressure level	Cooling	Nom.	dBA		78	80	82	86	88	87	88	89	90															
Operation range	Evaporator	Min.-Max.	°CDB		-12~20																								
	Condenser	Min.-Max.	°CDB		19~65																								
Refrigerant	Type/GWP															R-134a/1,430													
	Charge	kg		110	125	140	160	200	185	270	260	230	290	290	320	370													
	Circuits	Quantity															1					2							
Piping connections	mm		139.7				168.3				219.1				273														
	Condenser water inlet/outlet (OD)		168.3mm				219.1mm				168.3 / 219.1 mm				219.1 / 219.1 mm														
	Running current	Cooling	Nom.	A		126	140	171	201	229	249	299	340	372	400	450	498	554	596										
Unit	Running current	Max	A		172	191	235	280	316	342	417	470	513	559	621	696	758	834											
Power supply	Phase/Frequency/Voltage	Hz/V		3~/50/400																									

performances according to CSS software 10.33

Water cooled screw inverter chiller, premium efficiency, standard sound

- › Premium energy efficiency both at full and part load conditions
- › Compact footprint through stacked heat exchanger lay-out
- › Heat pump version with reversibility on water side (up to 65°C hot water production)
- › Multiple options available: sound proof cabinet, rapid restart, removable electrical panel, etc. to adapt the unit to your specific application and need
- › Thanks to a large operating envelope, the unit is suitable for all possible process and comfort applications
- › High efficient flooded type heat exchanger allowing maximum unit performances
- › One or two truly independent refrigerant circuits for outstanding reliability

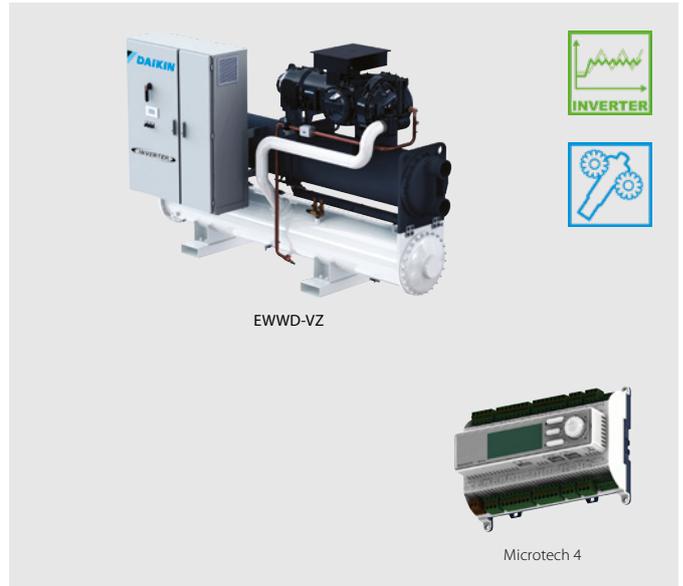

More details and final information can be found by scanning or clicking the QR codes.



EWWD-VZPS


Cooling only/ Heating only				EWWD-VZPS	505	715	910	C12	C16	C18	
Space cooling	A Condition Pdc (35°C - 27/19)			kW	505.02	717.71	908.11	1,201.02	1,604.03	1,757.01	
	ηs,c			%	339.6	355.2	344.4	353.6	354	350	
SEER					8.69	9.08	8.81	9.04	9.05	8.95	
Cooling capacity	Nom.			kW	505	718	908	1,201	1,604	1,757	
Power input	Cooling	Nom.		kW	85.1	124	153	218	291	326	
Capacity control	Method			Variable							
	Minimum capacity			%	20				10		
EER					5.93	5.77	5.91	5.49	5.5	5.39	
IPLV					9.61	9.68	9.57	9.79	9.82	9.92	
Dimensions	Unit	Height	mm	2,108	2,430	2,487	2,302	2,500	2,493		
		Width	mm	1,179	1,287	1,303	1,579	1,610	1,769		
		Length	mm	3,750	3,822		4,508	4,750	4,874		
Weight	Unit			kg	3,247	4,082	4,346	6,310	7,530	8,250	
	Operation weight			kg	3,375	4,349	4,660	6,900	8,300	9,200	
Water heat exchanger - evaporator	Type			Flooded shell and tube							
	Water volume			l	96	168	199	320	380	480	
	Water flow rate	Cooling	Nom.	l/s	24.2	34.3	43.4	57.4	76.7	84	
		Cooling	Nom.	kPa	55	42	44	38	49	41	
Water heat exchanger - condenser	Type			Shell and tube							
	Water volume			l	126	217	241	270	390	470	
	Water flow rate	Cooling	Nom.	l/s	29.4	41.3	52.1	69.9	93.4	102	
		Cooling	Nom.	kPa	16	17	19	21		28	
Compressor	Type			Driven vapour compressor							
	Quantity				1				2		
Sound power level	Cooling	Nom.		dB(A)	99	105		106	107	109	
Sound pressure level	Cooling	Nom.		dB(A)	80	86		87	88	89	
Operation range	Evaporator	Min.~Max.		°CDB	-12~20						
		Min.~Max.		°CDB	19~65						
Refrigerant	Type/GWP			R-134a/1,430							
	Charge			kg	120	195	185	305	320	350	
	Circuits	Quantity			1				2		
Piping connections			mm	139.7	219.1			273			
Unit	Condenser water inlet/outlet (OD)				219.1mm				219.1 / 219.1 mm		
	Running current	Cooling	Nom.	A	138	200	247	338	447	497	
Running current		Max		A	191	280	342	470	621	696	
Power supply	Phase/Frequency/Voltage			Hz/V	3~/50/400						

performances according to CSS software 10.33



Water cooled screw inverter chiller, standard efficiency, standard sound

- › Optimized energy efficiency both at full and part load conditions
- › Compact footprint through stacked heat exchanger lay-out
- › Heat pump version with reversibility on water side (up to 75°C hot water production)
- › Multiple options available: sound proof cabinet, rapid restart, removable electrical panel, etc. to adapt the unit to your specific application and need
- › Thanks to a large operating envelope, the unit is suitable for all possible process and comfort applications
- › High efficient flooded type heat exchanger allowing maximum unit performances
- › One or two truly independent refrigerant circuits for outstanding reliability

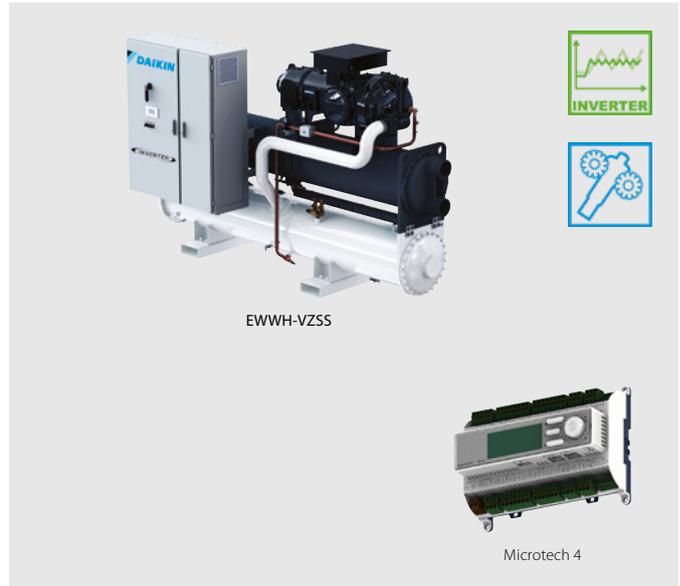

More details and final information can be found by scanning or clicking the QR codes.




Cooling only/Heating only				EWWH-VZSS												
				445	515	550	660	770	860	940	C10	C12	C13	C14	C15	
Space cooling	A Condition Pdc (35°C - 27/19)			kW	443	512	548.51	657.51	767.8	865.2	940.6	1,011.7	1,142.46	1,271.38	1,396.11	1,524.83
	ηs,c			%	336.4	338.4	336.8	348.4	345.2	318.4	327.2	339.6	331.2	340	345.6	353.2
SEER					8.61	8.66	8.62	8.91	8.83	8.16	8.38	8.69	8.48	8.7	8.84	9.03
Cooling capacity		Nom.		kW	443	512	549	658	768	865	941	1,012	1,142	1,271	1,396	1,525
Power input		Cooling	Nom.	kW	82.8	98.1	107	123	149	172	188	205	235	254	282	302
Capacity control		Method		Variable												
		Minimum capacity		%	20						10					
EER					5.35	5.22	5.15	5.34	5.14	5.02	5	4.93	4.87	5.01	4.95	5.04
IPLV					9.25		9.24	9.48	9.32	8.94	9.08	9.13	9.14	9.3	9.13	9.34
Dimensions	Unit	Height		mm	2,123			2,292	2,487	2,296			2,350	2,338	2,498	
		Width		mm	1,178	1,179		1,233	1,303	1,484	1,487		1,484	1,580	1,627	1,753
		Length		mm	3,722	3,750		3,690	3,822	4,792			4,508		4,750	
Weight	Unit		kg	2,892	2,928	2,941	3,451	4,237	5,570	5,790	5,820	6,220	6,890	7,260	8,260	
	Operation weight		kg	2,977	3,033	3,053	3,611	4,488	5,980	6,220	6,290	6,690	7,480	7,830	9,070	
Water heat exchanger - evaporator	Type			Flooded shell and tube												
	Water volume			l	88		96	134	156	230		270		320		380
	Water flow rate	Cooling	Nom.	l/s	21.2	24.5	26.2	31.5	36.8	41.4	45	48.4	54.6	60.8	66.8	72.9
Water pressure drop		Cooling	Nom.	kPa	46	61	52	59	64	39	46	39	50	44	53	45
Water heat exchanger - condenser	Type			Shell and tube												
	Water volume			l	81	102		126	217	180		200		270	250	430
	Water flow rate	Cooling	Nom.	l/s	25.5	29.6	31.8	38.1	44.8	50.3	54.8	59	66.8	74	81.4	88.7
Water pressure drop		Cooling	Nom.	kPa	19	17	20	19	17	25	22	25	38	25	32	18
Compressor	Type			Driven vapour compression												
	Quantity				1						2					
Sound power level	Cooling	Nom.	dBA	101	105		107	106		107		108		110		
Sound pressure level	Cooling	Nom.	dBA	82	86		88	87		88		89		90		
Refrigerant	Type/GWP			R-1234(ze)/7												
	Charge			kg	125	124	105	145	190	210	230	250	220	280		320
	Circuits	Quantity			1						2					
Piping connections				mm	139.7			168.3	219.1							
Unit	Condenser water inlet/outlet (OD)				168.3mm			219.1mm	168.3 / 168.3 mm			219.1 / 219.1 mm				
	Running current	Cooling	Nom.	A	131.0	153.0	167.0	188.0	227.0	264.0	287.0	312.0	353.0	385.0	426.0	458.0
		Max	A	183	226	235	268	324	374	402	451	493	549	591	647	
Power supply				Phase/Frequency/Voltage	Hz/V 3~/50/400											

performances according to CSS software 10.33

Water cooled screw inverter chiller, high efficiency, standard sound

- › High energy efficiency both at full and part load conditions
- › Compact footprint through stacked heat exchanger lay-out
- › Heat pump version with reversibility on water side (up to 75°C hot water production)
- › Multiple options available: sound proof cabinet, rapid restart, removable electrical panel, etc. to adapt the unit to your specific application and need
- › Thanks to a large operating envelope, the unit is suitable for all possible process and comfort applications
- › High efficient flooded type heat exchanger allowing maximum unit performances
- › One or two truly independent refrigerant circuits for outstanding reliability

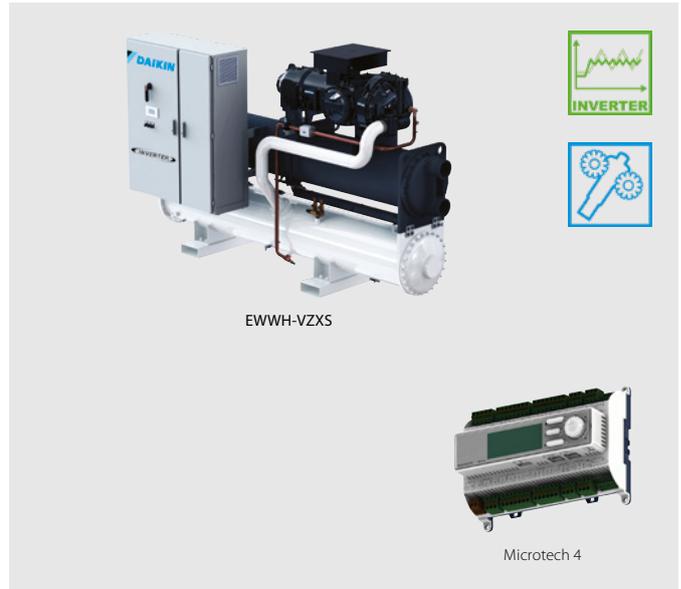

More details and final information can be found by scanning or clicking the QR codes.




EWWH-VZXS

Cooling only/Heating only				EWWH-VZXS															
				335	365	450	525	580	670	800	875	950	C11	C12	C13	C14	C15		
Space cooling	A Condition Pdc (35°C - 27/19)			kW	329.01	364.52	448	520.61	579.19	665.41	788.2	877.36	952.01	1,028.81	1,169.3	1,288.48	1,421.75	1,540.03	
	ηs,c			%	296	307.2	343.6	347.2	343.2	356	354.4	326	334	346.8			358	356.8	
SEER					7.6	7.88	8.79	8.88	8.78	9.1	9.06	8.35	8.55	8.87			9.15	9.12	
Cooling capacity	Nom.			kW	329	365	448	521	579	665	788	877	952	1,029	1,169	1,288	1,422	1,540	
Power input	Cooling			Nom.	kW	60.5	66.6	81	96	109	121	147	168	185	198	224	248	276	298
	Capacity control			Method	Variable														
				Minimum capacity	%	20						10							
EER					5.44	5.48	5.53	5.42	5.29	5.49	5.37	5.23	5.16	5.19	5.22	5.19	5.16	5.16	
IPLV					8.51	8.79	9.46	9.51	9.47	9.63	9.65	9.19	9.27	9.46	9.37	9.52	9.23	9.5	
Dimensions	Unit			Height	mm	2,135	2,123	2,235	2,487		2,296		2,301	2,350	2,500	2,469	2,493		
				Width	mm	1,178	1,179	1,189	1,303		1,484	1,639	1,579	1,580	1,610	1,704	1,769		
				Length	mm	3,722	3,750	3,690	3,822		4,792		4,508		4,750	4,874			
Weight	Unit			kg	2,968	2,911	3,102	3,470	3,451	4,257	4,552	5,860	6,240	6,520	6,920	7,530	7,790	8,670	
				Operation weight	kg	3,098	3,006	3,274	3,648	3,611	4,518	4,860	6,370	6,760	7,130	7,530	8,300	8,560	9,630
Water heat exchanger - evaporator	Type			Flooded shell and tube															
	Water volume			l	70	88	136	134		168	199	270		320		380	480		
	Water flow rate	Cooling	Nom.	l/s	15.8	17.5	21.4	24.9	27.7	31.8	37.7	41.9	45.5	49.1	55.9	61.6	67.9	73.6	
pressure drop			Nom.	kPa	54	38	35	37	31	39	36	29	34	28	37	32	28	33	
Water heat exchanger - condenser	Water volume			l	81	92	126	145	126	217	241	240	250	290		390	290	480	
	Water flow rate	Cooling	Nom.	l/s	18.9	20.9	25.7	30	33.5	38.4	45.7	50.7	55.1	59.6	67.6	74.6	82.3	89.3	
			pressure drop	Nom.	kPa	19	16	13	12	15	13	16		13	19	16	23	16	
Compressor	Type			Driven vapour compression															
	Quantity			1						2									
Sound power level	Cooling	Nom.	dBA	97	99	101	105		107		106		107		108	109	110		
			dBA	78	80	82	86		88		87		88		89		90		
Refrigerant	Type/GWP			R-1234(ze)/7															
	Charge			kg	124	110	125	140	130	200	185	250	220	270	255	305	320	346	
	Circuits	Quantity	1						2										
Piping connections			mm	139.7			168.3			219.1			273						
				Condenser water inlet/outlet (OD)	168.3mm			219.1mm			168.3 / 219.1 mm		219.1 / 219.1 mm						
Unit	Running current	Cooling	Nom.	A	96.0	106.0	129.0	151.0	173.0	187.0	226.0	259.0	284.0	304.0	341.0	379.0	421.0	454.0	
				A	134	149	183	226	247	268	324	374	402	451	493	549	591	647	
Power supply	Phase/Frequency/Voltage			Hz/V	3~/50/400														

performances according to CSS software 10.33

Water cooled screw inverter chiller, premium efficiency, standard sound

- › Premium energy efficiency both at full and part load conditions
- › Compact footprint through stacked heat exchanger lay-out
- › Heat pump version with reversibility on water side (up to 75°C hot water production)
- › Multiple options available: sound proof cabinet, rapid restart, removable electrical panel, etc. to adapt the unit to your specific application and need
- › Thanks to a large operating envelope, the unit is suitable for all possible process and comfort applications
- › High efficient flooded type heat exchanger allowing maximum unit performances
- › One or two truly independent refrigerant circuits for outstanding reliability

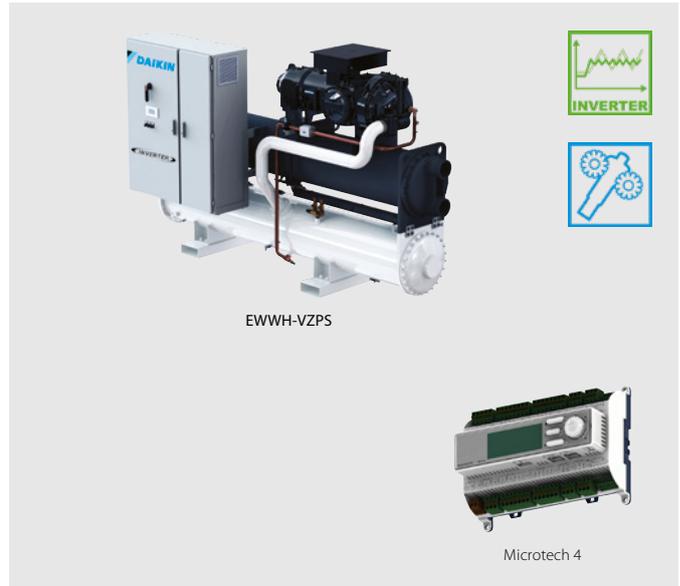

More details and final information can be found by scanning or clicking the QR codes.



Cooling only/Heating only				EWWH-VZPS	370	530	680	880	C12	C13
Space cooling	A Condition Pdc (35°C - 27/19)		kW	369.3	525.1	677.11	883.79	1,180.43	1,295.36	
	ηs,c		%	316.8	352.8	363.6	334.4	352.4	348.8	
SEER				8.12	9.02	9.29	8.56	9.01	8.92	
Cooling capacity	Nom.		kW	369	525	677	884	1,180	1,295	
Power input	Cooling	Nom.	kW	64.7	94.9	119	166	221	247	
Capacity control	Method			Variable						
	Minimum capacity		%	20						
EER				5.71	5.53	5.67	5.34	5.35	5.25	
IPLV				9.13	9.68	9.96	9.37	9.56	9.61	
Dimensions	Unit	Height	mm	2,108	2,430	2,487	2,302	2,500	2,493	
		Width	mm	1,179	1,287	1,303	1,579	1,610	1,769	
		Length	mm	3,750	3,822		4,508	4,750	4,874	
Weight	Unit		kg	3,247	4,082	4,346	6,310	7,530	8,250	
	Operation weight		kg	3,375	4,349	4,660	6,900	8,300	9,200	
Water heat exchanger - evaporator	Type			Flooded shell and tube						
	Water volume		l	96	168	199	320	380	480	
	Water flow rate	Cooling Nom.	l/s	17.7	25.1	32.3	42.2	56.4	61.9	
	Water pressure drop	Cooling Nom.	kPa	32	25	27	20	26	23	
Water heat exchanger - condenser	Type			Shell and tube						
	Water volume		l	126	217	241	270	390	470	
	Water flow rate	Cooling Nom.	l/s	21.1	30.1	38.9	50.9	68	74.9	
	Water pressure drop	Cooling Nom.	kPa	9		12	13	12	16	
Compressor	Type			Driven vapour compression						
	Quantity			1			2			
Sound power level	Cooling	Nom.	dBA	99	105		106	107	109	
Sound pressure level	Cooling	Nom.	dBA	80	86		87	88	89	
Refrigerant	Type/GWP			R-1234(ze)/7						
	Charge		kg	120	190	185	305	288	350	
	Circuits	Quantity		1			2			
Piping connections			mm	139.7	219.1		219.1		273	
	Condenser water inlet/outlet (OD)			219.1mm			219.1 / 219.1 mm			
Unit	Running current	Cooling Nom.	A	104.0	150.0	185.0	257.0	338.0	378.0	
		Max	A	149	226	268	374	493	549	
Power supply	Phase/Frequency/Voltage		Hz/V	3~/50/400						

performances according to CSS software 10.33





Water to water screw inverter chiller, standard efficiency, standard sound

- › Optimized energy efficiency both at full and part load conditions
- › Compact footprint through stacked heat exchanger lay-out
- › Heat pump version with reversibility on water side (up to 60°C hot water production)
- › Multiple options available: sound proof cabinet, rapid restart, removable electrical panel, etc. to adapt the unit to your specific application and need
- › Thanks to a large operating envelope, the unit is suitable for all possible process and comfort applications
- › High efficient flooded type heat exchanger allowing maximum unit performances
- › One or two truly independent refrigerant circuits for outstanding reliability



EWWS-VZ

More details and final information can be found by scanning or clicking the QR codes.



EWWS-VZSS

Cooling only/Heating only				EWWS-VZSS	600	700	740	880	C10	C12	C13	C14	C15	C17	C18	C20
Space cooling	A Condition Pdc (35°C - 27/19)		kW	599.51	693.51	743.53	879.64	1,020.09	1,148.76	1,263.41	1,351.54	1,514.87	1,689.58	1,831.98	2,013.41	
	ηs,c		%	316	314.4	313.2	320	313.2	321.2	314.8	312	297.6	313.6	304	318.4	
SEER				8.1	8.06	8.03	8.2	8.03	8.23	8.07	8	7.64	8.04	7.8	8.16	
Cooling capacity	Nom.		kW	600	694	744	880	1,020	1,149	1,263	1,352	1,515	1,690	1,832	2,013	
Power input	Cooling Nom.		kW	120.1	143.3	154.7	175.2	212.7	251.8	273.9	301	343	367.4	413.5	437.2	
Capacity control	Method			Variable												
	Minimum capacity		%	20				10								
EER				4.99	4.84	4.81	5.02	4.8	4.56	4.61	4.49	4.42	4.6	4.43	4.61	
IPLV				9.02	9.15		8.84	8.88	9.06	9.31	9.23	8.9	9.18	8.88	9.05	
Dimensions	Unit	Height	mm	2,123			2,292	2,487	2,296			2,350	2,338	2,498		
		Width	mm	1,178	1,179		1,233	1,303	1,484	1,487		1,484	1,580	1,627	1,753	
		Depth	mm	3,722	3,750		3,690	3,822	4,792			4,508			4,750	
Weight	Unit		kg	2,892	2,928	2,941	3,451	4,237	5,570	5,790	5,820	6,220	6,890	7,260	8,260	
	Operation weight		kg	2,977	3,033	3,053	3,611	4,488	5,980	6,220	6,290	6,690	7,480	7,830	9,070	
Water heat exchanger - evaporator	Type			Flooded shell and tube												
	Water volume		l	88			96	134	156	230		270		320		380
	Water flow rate	Cooling Nom.	l/s	28.7	33.3	35.7	42.2	48.9	55	60.6	64.7	72.6	80.9	87.8	96.4	
Water heat exchanger - condenser	Water pressure drop	Cooling Nom.	kPa	80	108	89	100	103	69	85	70	89	79	92	81	
	Type			Flooded Shell & Tube												
	Water volume		l	81	102		126	217	180	200		270		250	430	
Water flow rate	Cooling Nom.	l/s	34.5	40.1	43.2	50.6	59.3	67.1	73.7	79.2	89	98.7	107	117		
Water pressure drop	Cooling Nom.	kPa	31	29	32	29	33	43	38	44	64	41	53	36		
Compressor	Type			Driven vapour compressor												
	Quantity			1								2				
Sound power level	Cooling Nom.		dB(A)	101	105			107	106		107		108		110	
Sound pressure level	Cooling Nom.		dB(A)	82	86			88	87		88		89		90	
Refrigerant	Type/GWP			R-513A/631												
	Charge		kg	100	110		170	180	250	260	270	290	295	320	350	
	Circuits	Quantity		1								2				
Piping connections			mm	139.7			168.3	219.1								
			mm	168.3			219.1		168.3			219.1				

performances according to CSS software 10.33



Water to water screw inverter chiller, high efficiency, standard sound

- › High energy efficiency both at full and part load conditions
- › Compact footprint through stacked heat exchanger lay-out
- › Heat pump version with reversibility on water side (up to 62°C hot water production)
- › Multiple options available: sound proof cabinet, rapid restart, removable electrical panel, etc. to adapt the unit to your specific application and need
- › Thanks to a large operating envelope, the unit is suitable for all possible process and comfort applications
- › High efficient flooded type heat exchanger allowing maximum unit performances
- › One or two truly independent refrigerant circuits for outstanding reliability



EWWS-VZ

More details and final information can be found by scanning or clicking the QR codes.



EWWS-VZXS

Cooling only/Heating only				EWWS-VZXS	450	490	600	700	780	890	C10	C12	C13	C14	C16	C17	C19	C20	
Space cooling	A Condition Pdc (35°C - 27/19)			kW	441.23	493.3	605.32	704.66	783.15	888.89	1,038.67	1,178.53	1,287.26	1,390.42	1,570.18	1,725.3	1,876.17	2,045.66	
	ηs,c			%	306.4	313.6	328.4	329.2	328	328.4	328.8	331.2	326.4	329.2	331.2	326.4	323.2	326.8	
SEER					7.86	8.04	8.41	8.43	8.4	8.41	8.42	8.48	8.36	8.43	8.48	8.36	8.28	8.37	
Cooling capacity	Nom.			kW	441	493	605	705	783	889	1,039	1,179	1,287	1,390	1,570	1,725	1,876	2,046	
Power input	Cooling Nom.			kW	87.8	96.8	116.8	138.6	157.7	171.3	207.8	239.2	263.6	282.6	319.6	354.3	396.6	425.5	
Capacity control	Method			Variable															
	Minimum capacity			%	20						10								
EER					5.02	5.1	5.18	5.09	4.97	5.19	5	4.93	4.88	4.92	4.91	4.87	4.73	4.81	
IPLV					8.87	9.01	9.29	9.43	9.39	8.96	9.27	9.24	9.48	9.43	9.39	9.29	9.15		
Dimensions	Unit	Height		mm	2,135	2,123	2,123	2,235	2,487	2,487	2,296	2,301	2,350	2,500	2,469	2,493			
		Width		mm	1,178	1,179	1,189	1,303	1,484	1,639	1,579	1,580	1,610	1,704	1,769				
		Depth		mm	3,722	3,750	3,690	3,822	4,792	4,508	4,750	4,874							
Weight	Unit			kg	2,968	2,911	3,102	3,470	3,451	4,257	4,552	5,860	6,240	6,520	6,920	7,530	7,790	8,670	
	Operation weight			kg	3,098	3,006	3,274	3,648	3,611	4,518	4,860	6,370	6,760	7,130	7,530	8,300	8,560	9,630	
Water heat exchanger - evaporator	Type			Flooded shell and tube															
	Water volume			l	70	88	136	134	168	199	270	320	380	480					
	Water flow rate	Cooling Nom.		l/s	21.2	23.6	29	33.7	37.5	42.6	49.7	56.4	61.6	66.5	75.2	82.6	89.7	97.9	
Water pressure drop		Cooling Nom.		kPa	91	64	61	65	57	69	60	53	64	53	68	59	50	60	
	Water heat exchanger - condenser	Type			Flooded Shell & Tube														
Water volume			l	81	92	126	145	126	217	241	240	250	290	390	290	480			
Water flow rate		Cooling Nom.		l/s	25.8	28.7	34.5	40.4	45.1	50.8	59.8	68	74.4	80.2	90.7	99.8	108	118	
	Water pressure drop	Cooling Nom.		kPa	31	27	22	20	24	25	28	21	32	27	36	27			
Compressor		Type			Driven vapour compressor														
	Quantity				1						2								
Sound power level	Cooling Nom.		dB(A)	97	99	101	105	107	106	107	108	109	110						
	Sound pressure level		dB(A)	78	80	82	86	88	87	88	89	90							
Refrigerant	Type/GWP			R-513A/631															
	Charge			kg	95	130	110	170	210	185	250	260	290	320	350				
	Circuits	Quantity			1						2								
Piping connections			mm	139.7			168.3			219.1			273						
				mm	168.3			219.1			168.3 / 219.1			219.1					

performances according to CSS software 10.33



Water to water screw inverter chiller, premium efficiency, standard sound

- › Premium energy efficiency both at full and part load conditions
- › Compact footprint through stacked heat exchanger lay-out
- › Heat pump version with reversibility on water side (up to 62°C hot water production)
- › Multiple options available: sound proof cabinet, rapid restart, removable electrical panel, etc. to adapt the unit to your specific application and need
- › Thanks to a large operating envelope, the unit is suitable for all possible process and comfort applications
- › High efficient flooded type heat exchanger allowing maximum unit performances
- › One or two truly independent refrigerant circuits for outstanding reliability



EWWS-VZ

More details and final information can be found by scanning or clicking the QR codes.



EWWS-VZPS

Cooling only/Heating only				EWWS-VZPS	500	710	900	C12	C16	C17
Space cooling	A Condition Pdc (35°C - 27/19)		kW	500.08	710.08	898.24	1,187.65	1,585.78	1,735.47	
	ηs,c		%	321.6	334	335.2	336.4	330		
SEER				8.24	8.55	8.58	8.61	8.45		
Cooling capacity	Nom.		kW	500	710	898	1,188	1,586	1,735	
Power input	Cooling	Nom.	kW	91.3	133.8	165.1	235.4	313.7	350.7	
Capacity control	Method			Variable						
	Minimum capacity		%	20			10			
EER				5.48	5.31	5.44	5.05	4.95		
IPLV				9.13	9.48	9.17	9.36	9.48	9.4	
Dimensions	Unit	Height	mm	2,108	2,430	2,487	2,302	2,500	2,493	
		Width	mm	1,179	1,287	1,303	1,579	1,610	1,769	
		Depth	mm	3,750	3,822		4,508	4,750	4,874	
Weight	Unit		kg	3,247	4,082	4,346	6,310	7,530	8,250	
	Operation weight		kg	3,375	4,349	4,660	6,900	8,300	9,200	
Water heat exchanger - evaporator	Type			Flooded shell and tube						
	Water volume		l	96	168	199	320	380	480	
	Water flow rate	Cooling	Nom.	l/s	23.9	34	43	56.8	75.8	83
		Water pressure drop	Cooling	Nom.	kPa	57	44	46	39	50
Water heat exchanger - condenser	Type			Flooded Shell & Tube						
	Water volume		l	126	217	241	270	390	470	
	Water flow rate	Cooling	Nom.	l/s	28.9	40.6	51.1	68.3	91.1	100
		Water pressure drop	Cooling	Nom.	kPa	16	17	19	21	27
Compressor	Type			Driven vapour compressor						
	Quantity			1			2			
Sound power level	Cooling	Nom.	dB(A)	99	105	106	107	109		
Sound pressure level	Cooling	Nom.	dB(A)	80	86	87	88	89		
Refrigerant	Type/GWP			R-513A/631						
	Charge		kg	130	180	190	320	350		
	Circuits	Quantity		1			2			
Piping connections			mm	139.7	219.1			273		
			mm	219.1						

performances according to CSS software 10.33



Water cooled scroll heat pump

- › One of the most compact units on the market: 600mm x 600mm x 600mm
- › Low energy consumption
- › Low operating sound level
- › Easy installation and maintenance
- › Stainless steel plate heat exchanger
- › Low refrigerant volume
- › Standard integrated: pressure ports, flow switch, filter, shut-off valves and air purge
- › Advanced μC^2SE controller for direct connection to a Modbus based BMS or to a remote user interface



More details and final information can be found by scanning or clicking the QR codes.



EWLQ-KC

Cooling Only				EWLQ-KC	014	025	033	049	064
Cooling capacity	Nom.		kW	12.09	19.87	28.90	39.35	57.84	
Power input	Cooling	Nom.	kW	3.74	6.11	8.43	12.03	16.41	
Capacity control	Method			Fixed					
	Minimum capacity		%	100			50		
EER				3.237	3.254	3.429	3.27	3.524	
Dimensions	Unit	Height	mm	600					
		Width	mm	600					
		Depth	mm	600			1,200		
Weight	Unit			kg	62	124	130	238	249
	Operation weight			kg	70	129	135	247	258
Water heat exchanger - evaporator	Type			Brazen plate					
	Water volume			l	1.47	1.96	2.74	4.47	5.88
	Water flow rate	Cooling	Nom.	l/s	0.576	0.947	1.378	1.876	2.757
Compressor	Water pressure drop	Cooling	Nom.	kPa	9.71	16.4	21.6	20.5	34.8
	Type	Scroll compressor							
	Quantity			1			2		
Sound power level	Cooling	Nom.	dBA	69.0			76.0	72.0	79.0
Sound pressure level	Cooling	Nom.	dBA	55.2			62.1	57.6	64.6
Operation range	Evaporator	Cooling	Min.~Max.	°CDB -10 ~20					
	Condenser	Heating	Min.~Max.	°CDB 20 ~55					
Refrigerant	Type/GWP			R-410A/2,088.0					
	Charge			kg	0.0				
	Circuits	Quantity			1			2	
Piping connections	Evaporator water inlet/outlet (OD)				G1"			G1" 1/2	
Unit	Starting current	Max		A	57.4	109.3	124.3	124.8	143.6
	Running current	Cooling	Nom.	A	6.57	10.5	14.1	20.9	28.1
		Max		A	9.16	15.5	19.3	31.0	38.7
Power supply	Phase/Frequency/Voltage			Hz/V	3N~/50 /400				



Condenserless multi-scroll chiller, standard efficiency, standard sound

- › Single refrigerant circuit (2 scroll compressors) with single evaporator
- › For chilled water production, to be combined with a remote condensing unit
- › Compact design to allow easy indoor installation or retrofit operations
- › Conceived for stacked installation of two single circuit units to reduce the footprint
- › High efficiency and reliable scroll compressor
- › Stainless steel plate heat exchanger



More details and final information can be found by scanning or clicking the QR codes.



Cooling only				EWLQ-G-SS												
Cooling capacity	Nom.			090	100	120	130	150	170	190	210	240	300	360		
Power input	Cooling	Nom.	kW	22.4	25.8	29.2	33.0	36.8	42.0	47.0	54.2	59.9	75.6	91.8		
Capacity control	Method	Step														
	Minimum capacity	%		50.0	43.0	50.0	44.0	50.0	45.0	50.0	43.0	50.0	40.0	50.0		
EER				3.86	3.81	3.78	3.79	3.80	3.86	3.80	3.85	3.84	3.77			
Dimensions	Unit	Height	mm	1,066										1,186		
		Width	mm	928												
		Length	mm	2,743												
Weight	Unit			kg	494	578	686	714	742	773	807	838	852	967	1,046	
	Operation weight			kg	525	615	729	760	791	826	863	901	916	1,044	1,134	
Water heat exchanger - evaporator	Type	Plate heat exchanger														
	Water volume			l	6	8	10	12	13	15	17	27	34			
	Water flow rate	Nom.	l/s	4.2	4.7	5.3	6.0	6.7	7.7	8.7	9.8	11.1	13.9	16.6		
Compressor	Water pressure drop	Cooling	Nom.	kPa	44	35	29	31	33	30	38	41				
	Type	Scroll compressor														
Sound power level	Quantity	2														
	Cooling	Nom.	dB(A)	80.0	83.0	85.0	87.0	88.0	90.0	92.0	93.0					
Sound pressure level	Cooling	Nom.	dB(A)	64.0	67.0	69.0	70.0	72.0	74.0	76.0	77.0					
	Evaporator	Cooling	Min.-Max.	°CDB	-10~15											
Operation range	Condenser	Cooling	Min.-Max.	°CDB	30~60											
	Refrigerant	Type / GWP	R-410A / 2,087.5													
Piping connections	Circuits	Quantity	1													
	Evaporator water inlet/outlet (OD)				1" 1/2				2" 1/2				3"			
Unit	Starting current	Max	A	204	255	261	308	316	354	368	466	481.0	640	677		
	Running current	Cooling	Nom.	A	39	42	45	51	57	64	70	81	88	111	135	
		Max	A	59	66	72	80	88	102	116	131	145	183	221		
Power supply	Phase/Frequency/Voltage			Hz/V	3~/50/400											

Condenserless multi-scroll chiller, standard efficiency, standard sound

- › Dual refrigerant circuit (4 scroll compressors) with single evaporator
- › For chilled water production, to be combined with a remote condensing unit
- › Compact design to allow easy indoor installation or retrofit operations
- › High efficiency and reliable scroll compressor
- › Stainless steel plate heat exchanger



More details and final information can be found by scanning or clicking the QR codes.




EWLQ-L-SS

Cooling only				EWLQ-L-SS	180	205	230	260	290	330	380	430	480	540	600	660	720
Cooling capacity	Nom.		kW	173	197	224	249	279	317	361	409	459	511	571	624	676	
Power input	Cooling	Nom.	kW	44.3	51.1	57.9	65.6	73.2	83.8	93.5	108	119	135	152	168	184	
Capacity control	Method			Step													
	Minimum capacity		%	25.0	21.0	25.0	22.0	25.0	23.0	25.0	21.0	25.0	22.0	20.0	18.0	25.0	
EER				3.91	3.86	3.87	3.79	3.81	3.78	3.86	3.79	3.84	3.78	3.76	3.71	3.67	
Dimensions	Unit	Height	mm	1,970													
		Width	mm	928													
		Length	mm	2,801													
Weight	Unit		kg	832	1,007	1,202	1,252	1,333	1,380	1,432	1,511	1,560	1,609	1,694	1,833	1,957	
	Operation weight		kg	894	1,081	1,292	1,345	1,436	1,486	1,547	1,638	1,690	1,741	1,844	1,990	2,120	
Water heat exchanger - evaporator	Type			Plate heat exchanger													
	Water volume		l	19	22	29	35	41	49	62							
	Water flow rate	Nom.	l/s	8.3	9.5	10.7	11.9	13.4	15.2	17.3	19.6	21.9	24.5	27.3	29.9	32.4	
Compressor	Water pressure drop	Cooling	Nom.	kPa	25	20	25	22	29	36	45	44	52	62			
	Type			Scroll compressor													
Sound power level	Quantity			4													
	Cooling	Nom.	dB(A)	83.0	86.0	88.0	90.0	91.0	93.0	95.0	96.0						
Sound pressure level	Cooling	Nom.	dB(A)	65.0	68.0	70.0	72.0	74.0	73.0	76.0	77.0	78.0					
	Evaporator	Cooling	Min.-Max.	°CDB	-10~15												
Operation range	Condenser	Cooling	Min.-Max.	°CDB	30~60												
	Refrigerant	Type / GWP		R-410A / 2,087.5													
Piping connections	Circuits	Quantity		2													
	Evaporator water inlet/outlet (OD)			3"													
Unit	Starting current	Max	A	263	320	333	388	403	456	484	597	626	785	822	860	898	
	Running current	Cooling	Nom.	A	78	84	90	102	114	128	141	161	176	199	223	246	269
		Max	A	118	131	144	160	175	205	232	262	290	328	366	403	441	
Power supply	Phase/Frequency/Voltage		Hz/V	3~/50/400													

Condenserless screw chiller, standard efficiency, standard sound

- › Compact design to allow easy indoor installation or retrofit operations
- › Daikin semi-hermetic single screw stepless compressor
- › High energy efficiency both at full and part load conditions
- › Chilled water temperatures down to -10°C on standard unit
- › Optimised for use with R-134a
- › MicroTech 4 controller with superior control logic and easy interface

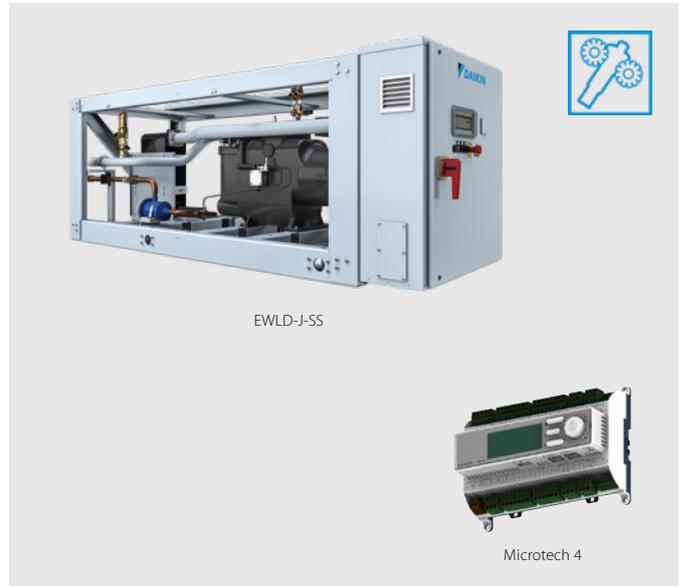

More details and final information can be found by scanning or clicking the QR codes.




Cooling only				EWLD-J-SS	110	130	145	165	195	235	265
Cooling capacity	Nom.		kW	110	128	142	163	191	236	264	
Power input	Cooling	Nom.	kW	31.2	38.4	43.8	50.4	56.0	66.0	75.3	
Capacity control	Method	Stepless									
	Minimum capacity	25.0									
EER				3.51	3.33	3.25	3.24	3.42	3.58	3.51	
Dimensions	Unit	Height	mm	1,020							
		Width	mm	913							
		Length	mm	2,684							
Weight	Unit		kg	1,124	1,141	1,237	1,263	1,305	1,489	1,489	
		Operation weight	kg	1,138	1,159	1,253	1,281	1,327	1,518	1,518	
Water heat exchanger - evaporator	Type	Plate heat exchanger									
	Water volume				14	18	14	17	20	26	26
	Water flow rate	Nom.	l/s	5.2	6.1	6.8	7.8	9.2	11.3	12.6	
	Water pressure drop	Cooling	Nom.	kPa	14	13	39	37	33	26	32
Compressor	Type	Single screw compressor									
	Quantity	1									
Sound power level	Cooling	Nom.	dBA	89.0							
Sound pressure level	Cooling	Nom.	dBA	79.0							
Operation range	Evaporator	Cooling	Min.-Max.	-10~-15							
	Condenser	Cooling	Min.-Max.	25~60							
Refrigerant	Type / GWP	R-134a / 1,430									
	Circuits	Quantity	1								
Piping connections	Evaporator water inlet/outlet (OD)			76.2 mm							
Unit	Maximum starting current	A			153		197		197	290	290
	Nominal running current (RLA)	Cooling	A	52	62	72	81	91	107	120	
	Maximum running current	A			85	103	114	130	154	168	201
Power supply	Phase/Frequency/Voltage			Hz/V 3~/50/400							

performances according to CSS software 10.34

Condenserless screw chiller, standard efficiency, standard sound

- › HFO R-1234ze(E) Refrigerant with Ozone Depletion Potential equal to zero and extremely low Global Warming Potential
- › Daikin semi-hermetic single screw compressor
- › Direct expansion plate to plate evaporator
- › Shell and tube condenser
- › Silver efficiency and standard sound
- › Upgrade to new MicroTech 4 controller

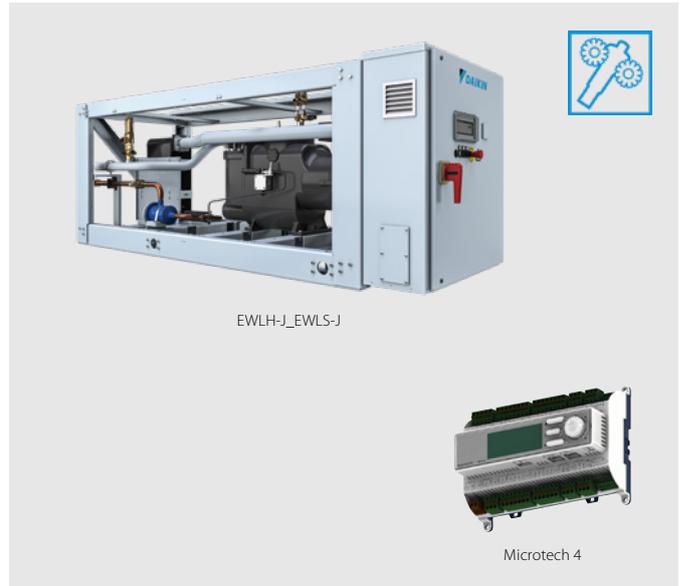

More details and final information can be found by scanning or clicking the QR codes.




				EWLH-J-SS	080	100	110	130	140	170	190	
Cooling capacity	Nom.			kW	84	102	109	127	143	174	193	
Power input	Cooling	Nom.		kW	23.3	28.1	31.8	37	41.5	49.6	56.3	
Capacity control	Method			Stepless								
	Minimum capacity			%	25							
EER					3.62		3.43	3.42	3.43	3.51	3.43	
Dimensions	Unit	Height		mm	1,020							
		Width		mm	913							
		Length		mm	2,684							
Weight	Unit			kg	1,124	1,141	1,237	1,263	1,305	1,489		
	Operation weight			kg	1,138	1,159	1,253	1,281	1,327	1,518		
Water heat exchanger - evaporator	Type			Plate heat exchanger								
	Water volume			l	14	18	14	17	20	26		
	Water flow rate	Cooling	Nom.	l/s	4	4.9	5.2	6	6.8	8.3	9.2	
	Water pressure drop	Cooling	Nom.	kPa	9.7	9.9	17.5	17.6	16.2	15.5	18.7	
Compressor	Type			Single screw compressor								
	Quantity				1							
Sound power level	Cooling	Nom.		dBA	88.9							
Sound pressure level	Cooling	Nom.		dBA	79							
Refrigerant	Type			R-1234(ze)								
	Circuits	Quantity			1							
Piping connections				mm	76.2							
Unit	Starting current	Max		A	153			197			290	
		Running current	Cooling	Nom.	A	42	48	59	65	72	84	92
	Max		A	75	90	100	114	143	158	178		
Power supply	Phase/Frequency/Voltage			Hz/V	3~/50 /400							

performances according to CSS software 10.34

Condenserless screw chiller, standard efficiency, standard sound

- › Refrigerant R-513A
- › Daikin semi-hermetic single screw compressor
- › Direct expansion plate to plate evaporator
- › Shell and tube condenser
- › Silver efficiency and standard sound
- › Upgrade to new MicroTech 4 controller

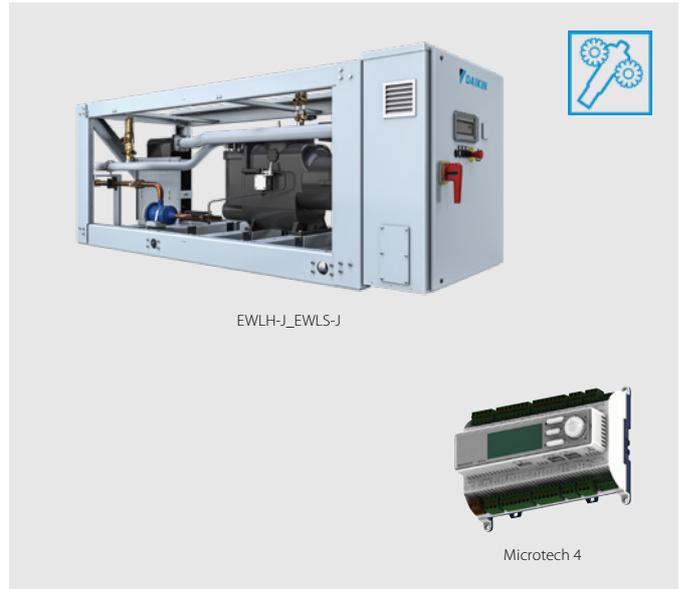

More details and final information can be found by scanning or clicking the QR codes.



				EWLS-J-SS	110	130	150	170	200	240	270	
Cooling capacity	Nom.		kW	111	132	150	175	200	236	268		
Power input	Cooling	Nom.		kW	32.2	38.7	44.8	51.2	58.2	69.4	78.8	
Capacity control	Method		Stepless									
	Minimum capacity		%	25								
EER				3.44	3.4	3.35	3.41	3.44	3.41	3.4		
Dimensions	Unit	Height	mm	1,020								
		Width	mm	913								
		Length	mm	2,684								
Weight	Unit			kg	1,124	1,141	1,237	1,263	1,305	1,489		
		Operation weight		kg	1,138	1,159	1,253	1,281	1,327	1,518		
Water heat exchanger - evaporator	Type		Plate heat exchanger									
	Water volume		l	14	18	14	17	20	26			
	Water flow rate	Cooling	Nom.	l/s	5.3	6.3	7.2	8.4	9.6	11.3	12.8	
	Water pressure drop	Cooling	Nom.	kPa	16	15.8	31.1	31.5	30	27	33.8	
Compressor	Type		Single screw compressor									
	Quantity		1									
Sound power level	Cooling	Nom.		dB(A)	88.9							
Sound pressure level	Cooling	Nom.		dB(A)	79							
Refrigerant	Type		R-513A									
	Circuits	Quantity		1								
Piping connections			mm	76.2								
Unit	Starting current	Max		A	154			198		291		
		Running current	Cooling	Nom.	A	54	65	75	84	94	111	125
	Max		A	81	96	108	122	141	164	185		
Power supply	Phase/Frequency/Voltage		Hz/V	3~/50 /400								

performances according to CSS software 10.34

Condenserless screw chiller, standard efficiency, standard sound

- › DX shell and tube evaporator – one pass refrigerant side for easy oil circulation and return
- › Stepless single-screw compressor
- › Standard electronic expansion valve
- › Optimised for use with R-134a



More details and final information can be found by scanning or clicking the QR codes.



EWLD-I-SS

Cooling only				EWLD-I-SS	320	400	420	500	600	650	750	800	850	900	950	C10	C11	C12	C13	C14	C15	C16	C17	
Cooling capacity	Nom.			kW	315	374	437	509	607	670	740	802	865	935	975	1,029	1,097	1,144	1,210	1,278	1,330	1,381	1,433	
Power input	Cooling	Nom.		kW	80.3	96.0	113	134	160	175	192	208	224	246	264	283	302	318	336	356	375	395		
Capacity control	Method				Stepless																			
	Minimum capacity			%	25.0				12.5				8.3											
EER					3.93	3.89	3.88	3.79	3.80	3.82		3.86		3.81	3.69	3.64	3.83	3.79		3.80	3.74	3.68	3.63	
Dimensions	Unit	Height		mm	1,899				2,325				2,415											
		Width		mm	1,464								2,135											
		Length		mm	3,114				4,391				4,426											
Weight	Unit			kg	1,861	1,869	1,884	3,331	3,339	3,347	3,356	3,364	3,412	5,146	5,167	5,188		5,208						
	Operation weight			kg	2,054	2,052	2,056	3,602	3,603	3,604	3,605	3,645	5,667	5,671	5,677		5,680							
Water heat exchanger - evaporator	Type				Single pass shell and tube																			
	Water volume			l	193	183	172	271	263	256	248	241	233	504	489	472	504	489	472					
	Water flow rate	Nom.		l/s	15.1	17.9	20.9	24.4	29.1	32.1	35.4	38.4	41.4	44.8	46.7	49.3	52.5	54.8	57.9	61.2	63.7	66.1	68.6	
Compressor	Water pressure drop	Cooling	Total	kPa	34	46	49	56	50	40	52	49	40	49	36	54	47	51	43	53	57	61	65	
	Type				Single screw compressor																			
Sound power level	Quantity				1				2				3											
	Cooling	Nom.		dB(A)	94.0	97.0				98.0	99.0	100.0				101.0	103.0							
Sound pressure level	Cooling	Nom.		dB(A)	75.0	76.0	78.0				79.0	80.0	81.0				80.0	81.0	83.0					
	Evaporator	Cooling	Min.-Max.	°CDB	-8~15																			
Operation range	Condenser	Cooling	Min.-Max.	°CDB	25~60																			
	Type / GWP				R-134a / 1,430																			
Refrigerant	Circuits	Quantity			1				2				3											
	Evaporator water inlet/outlet (OD)				42mm																			
Piping connections	Unit	Maximum starting current		A	330	464				493	627	650	681				703	836	867	898	920	942		
	Nominal running current (RLA)	Cooling		A	131	157	181	214	260	287	313	338	361	391	420	448	470	493	517	542	571	601	631	
	Maximum running current			A	204	233	271	299	407	436	465	504	542	570	597	670	698	737	775	814	841	868	896	
Power supply	Phase/Frequency/Voltage			Hz/V	3~/50/400																			



Water cooled centrifugal chiller, high efficiency, standard sound

- › No friction loss, no oil contamination, no additional oil management systems and an increased equipment life thanks to the magnetic bearing technology
- › Excellent part load efficiency
- › Totally oil-free operation resulting in reduced maintenance costs and increased reliability
- › Compact footprint through stacked heat exchanger lay-out
- › Increased installation flexibility thanks to limited dimensions
- › Easy handling: thanks to its compact size, it can easily pass through the doorway
- › MicroTech 4 controller with superior control logic and easy interface
- › A wide portfolio of options is available to meet different requirements.
- › The compressor vibration levels are extremely low as a result of the high-speed design
- › Optimized for highly efficient R134a refrigerant and compatible with next generation refrigerants



EWWD-DZ

Microtech 4



More details and final information can be found by scanning or clicking the QR codes.



EWWD-DZXS

Cooling Only				EWWD-DZXS																
Space cooling		A Condition Pdc (35°C - 27/19) ηs,c		kW	320.01	443.01	530	610	640	700	880	C10	C13	C14	C15	C21				
SEER				%	334	314	324	344	349	342	350	363	349.8	362	360.6	365.4				
Cooling capacity	Nom.			kW	320	443	528	610	638	700	883	1,056	1,325	1,402	1,565	2,070				
Power input	Cooling	Nom.		kW	66.5	88.5	102	124.7	131	126	176	205	272	256	310	391				
Capacity control	Method				Variable															
	Minimum capacity			%	30	21	16	15	18	11	7	9	8	6						
EER					4.81	5	5.14	4.89	4.85	5.53	5.01	5.15	4.88	5.46	5.04	5.3				
ESEER					7.94	7.92	8.2	7.78	8.16	8.08	8.09	8.39	-	8.29	-	-				
IPLV					9.38	9.33	9.7	9.41	9.5	9.86	9.52	9.91	9.18	10.1	9.5	9.42				
Dimensions	Unit	Height		mm	1,865			1,985			2,200		2,083		2,200		2,225		2,290	
		Width		mm	1,055			1,160			1,270		1,510		1,270		1,510			
		Length		mm	3,625			3,585			3,580		4,793		3,580		4,768		4,812	
			Operation weight		kg	1,700	1,900	2,000	2,850		2,600	2,900	3,600	4,350	3,800	4,750	5,500			
Water heat exchanger - evaporator	Type				Flooded shell and tube															
	Water volume			l	70	96	107		134		156	199	271.8	229	317.4	444.3				
	Water flow rate	Nom.		l/s	15.3	21.2	25.3	29.1	30.5	33.5	42.3	50.6	-	67.2	-	-				
		Cooling	Nom.	l/s	-															
Water pressure drop	Cooling	Nom.	kPa	47.4	40.6	45	59.1	51	61.3	64	60.4	60.1	74	61.1	71.9					
Water heat exchanger - condenser	Type				Shell and tube															
	Water volume			l	83	100	120		170	188	211	263	Flooded Shell & Tube	Shell and tube	Flooded Shell & Tube					
	Water flow rate	Nom.		l/s	18.3	25.3	30.1	35.1	36.7	39.4	50.5	60.1	-	79.1	-	-				
		Cooling	Nom.	l/s	-															
Water pressure drop	Cooling	Nom.	kPa	49.2	59.5	54.5	74	46.2	41.6	50.9	50.3	56	52.9	43	57					
Compressor	Type				Driven vapour compressor															
	Quantity				1			2		1	2		3	2	3					
Sound power level	Cooling	Nom.		dB(A)	87.9	88.9	89.9	91.1	91	91.1	92	93.3	99	94.3	100	101				
Sound pressure level	Cooling	Nom.		dB(A)	69.6	70.6	71.6	72.6			73.6	74.6	80	75.6	81	82				
Operation range	Evaporator	Cooling	Min.-Max.	°CDB	4~20															
	Condenser	Cooling	Min.-Max.	°CDB	20~55		20~42		20~55		20~42		20~55		20~42		20~42			
Refrigerant	Type/GWP				R-134a/1,430															
	Charge			kg	120			180			230	320	230	340	390					
	Circuits	Quantity			1															
Refrigerant charge				TCO2eq	172			257			329	-	329	-	-					
Piping connections				mm	139.7			168.3			219.1									
Piping connections				mm	139.7			168.3			219.1									
Unit	Running current	Cooling	Nom.	A	100.55	138.22	155.23	203.41	200.56	190.23	274.86	309.17	445	383.87	471.7	588				
		Max	A	134	208	166	267		196	417	331	631	392	511	589					
Power supply	Phase/Frequency/Voltage			Hz/V	3~/50/400															

performances according to CSS software 10.27

Water cooled centrifugal chiller, high efficiency, standard sound

- › No friction loss, no oil contamination, no additional oil management systems and an increased equipment life thanks to the magnetic bearing technology
- › Excellent part load efficiency
- › Totally oil-free operation resulting in reduced maintenance costs and increased reliability
- › Compact footprint through stacked heat exchanger lay-out
- › Increased installation flexibility thanks to limited dimensions
- › Easy handling: thanks to its compact size, it can easily pass through the doorway
- › MicroTech 4 controller with superior control logic and easy interface
- › A wide portfolio of options is available to meet different requirements.
- › The compressor vibration levels are extremely low as a result of the high-speed design
- › Optimized for highly efficient R134a refrigerant and compatible with next generation refrigerants



EWWD-DZ

Microtech 4

More details and final information can be found by scanning or clicking the QR codes.



EWWD-DZXE



Cooling Only				EWWD-DZXE														
Space cooling		A Condition Pdc (35°C - 27/19) ηs,c		kW	340	470	570	670	680	740	950	C10	C11	C14	C15	C17	C22	
SEER				%	335	316	326	345	349	346	352	339.8	365	350.6	366	359	370.2	
Cooling capacity	Nom.			kW	341	474	566	670	682	742	946	1,038	1,130	1,437	1,478	1,685	2,173	
Power input	Cooling	Nom.		kW	69.9	93.5	108	138.4	138	131	186	210	216	288	263	329	393	
Capacity control	Method				Variable													
	Minimum capacity			%	29	20		15		17		10		7	9	7	6	
EER					4.88	5.07	5.22	4.84	4.91	5.65	5.08	4.94	5.23	4.98	5.6	5.12	5.53	
ESEER					7.81	7.83	8.11	7.52	8	8.09	7.96	-	8.26	-	8.22	-	-	
IPLV					9.29	9.3	9.71	9.22	9.37	9.9	9.46	9.33	9.86	9.2	10.1	9.49	9.52	
Dimensions	Unit	Height		mm	1,865			1,985			2,082	2,200	2,083	2,200	2,225	2,290		
		Width		mm	1,055			1,160			1,510	1,270	1,510	1,270	1,510			
		Length		mm	3,625			3,585			4,688	3,580	4,793	3,580	4,768	4,812		
		Weight		kg	1,750	1,950	2,050	2,850	2,650	3,000	4,400	3,700	4,700	3,900	5,100	5,900		
Water heat exchanger - evaporator	Type	Water volume		l	70	96	107	134	156	207.3	199	317.4	229	317.4	444.3			
		Water flow rate	Nom.	l/s	16.4	22.7	27.1	32	32.7	35.6	45.3	-	54.1	-	70.9	-		
			Cooling	Nom.	l/s								49.1	-	68	-	80.4	103
		Water pressure drop	Cooling	Nom.	kPa	54.2	46.5	51.5	71.4	58.3	68.7	73.2	61.4	68.9	70.7	82	70.7	78.9
Water heat exchanger - condenser	Type	Shell and tube										Flooded Shell & Tube	Shell and tube	Flooded Shell & Tube	Shell and tube	Flooded Shell & Tube		
		Water volume	l	83	100	120	170	188	211	326.4	263	359.9	320	442.6	603.6			
		Water flow rate	Nom.	l/s	19.6	27	32.1	38.6	39.1	41.6	53.9	-	64.1	-	83	-		
			Cooling	Nom.	l/s								58.9	-	81.4	-	95.8	121
Water pressure drop	Cooling	Nom.	kPa	56.4	68.4	62.4	90	52.9	46.7	58.3	44	57.6	66	58.5	50	62		
Compressor	Type	Driven vapour compressor																
		Quantity		1			2		1	2	3	2	3	2	3			
Sound power level	Cooling	Nom.	dB(A)	87.9	88.9	89.9	91.1	91	91.1	92	98	93.3	99	94.3	100	101		
			dB(A)	69.6	70.6	71.6		72.6		73.6	79	74.6	80	75.6	81	82		
Operation range	Evaporator	Cooling	Min.~Max.	4~20														
	Condenser	Cooling	Min.~Max.	°CDB	20~55	20~42	20~55	20~42	20~55	20~42	20~55	20~42	20~55	20~42				
Refrigerant	Type/GWP		R-134a/1,430															
	Charge		kg	130	120	200	190	200	350	250	400	250	420	470				
	Circuits	Quantity		1														
Refrigerant charge			TCO2eq	186	172	286	272	286	-	358	-	358	-					
Piping connections			mm	139.7			168.3			219.1								
Piping connections			mm	139.7			168.3			219.1								
Unit	Running current	Cooling	Nom.	A	105.42	144.7	162.48	212.9	210.15	196	287.44	318.3	323.53	425.9	392	496	588	
				A	134	208	166	267	196	417	406	331	631	392	511	589		
Power supply	Phase/Frequency/Voltage		Hz/V	3~/50/400														

performances according to CSS software 10.27

Water cooled centrifugal chiller, high efficiency, standard sound

- › No friction loss, no oil contamination, no additional oil management systems and an increased equipment life thanks to the magnetic bearing technology
- › Excellent part load efficiency
- › Totally oil-free operation resulting in reduced maintenance costs and increased reliability
- › Compact footprint through stacked heat exchanger lay-out
- › HFO R1234zeE Refrigerant with Ozone Depletion Potential equal to zero and extremely low Global Warming Potential
- › Increased installation flexibility thanks to limited dimensions
- › Easy handling: thanks to its compact size, it can easily pass through the doorway
- › MicroTech 4 controller with superior control logic and easy interface
- › A wide portfolio of options is available to meet different requirements.
- › The compressor vibration levels are extremely low as a result of the high-speed design



EWWH-DZ

Microtech 4



More details and final information can be found by scanning or clicking the QR codes.



EWWH-DZXS

Cooling Only				EWWH-DZXS												
				230	320	380	430	455	460	640	755	920	945	C11	C13	
Space cooling	A Condition Pdc (35°C - 27/19)			kW	227.08	318.33	376.33	455.13	454.66	474.48	637.15	752.27	917.79	945.8	1,126	1,352
	ηs,c			%	330	346		342		339	352	354	353	360.2	359.4	364.2
SEER					8.78	8.66	8.67	8.8	8.78	8.32	9.04	9.07	9.06	9.02	9.04	9.13
Cooling capacity	Nom.			kW	227	318	376	455		461	637	752	918	945.8	1,126	1,352
Power input	Cooling Nom.			kW	45.6	60.5	71.4	93.3	90.6	79.3	120.5	142.1	158.8	181	216.5	237.7
Capacity control	Method			Variable										Stepless		
	Minimum capacity			%	24	21	20	13	12	20	11	10		11		
EER					4.98	5.27		4.88	5.02	5.81	5.29		5.78	5.22	5.2	5.69
ESEER					7.78	7.97	7.98	7.89	8.06	7.76	8.26	8.3	8.16	-		
IPLV					9.37	9.52	9.56	9.44	9.5		9.74	9.78	9.74	9.54	9.57	9.71
Dimensions	Unit	Height		mm	1,865			1,985			2,200		2,083	2,225	2,290	
		Width		mm	1,055			1,160			1,270		1,510			
		Length		mm	3,625			3,585			3,580		4,793	4,768	4,812	
Weight	Unit			kg	1,700	1,900	2,000	2,850		2,600	2,900	3,600	3,800	4,350	4,750	5,500
	Operation weight			kg	1,973	2,216	2,347	3,197	3,344	3,102	3,458	4,292	4,579	5,020	5,540	6,570
Water heat exchanger - evaporator	Type			Flooded shell and tube												
	Water volume			l	70	96	107		134		156	199	229	271.8	317.4	444.3
	Water flow rate	Cooling	Nom.	l/s	10.8	15.2	18	20.5	21.7	22	30.4	35.9	43.9	45.2	53.8	64.6
Water heat exchanger - condenser	Type			Shell and tube												
	Water volume			l	83	100	120		170	188	211	263	320	359.9	442.6	603.6
	Water flow rate	Cooling	Nom.	l/s	13	18.1	21.4	24.5	26.1	25.8	36.2	42.7	51.4	53.8	64.2	76
Compressor	Type			Driven vapour compressor												
	Quantity			1			2		1	2		3				
	Sound power level	Cooling	Nom.	dB(A)	87.9	88.9	89.9	91.1	91	91.1	92	93.3	94.3	99	100	101
Sound pressure level	Cooling	Nom.	dB(A)	69.6	70.6	71.6	72.6		73.6		74.6	75.6	80	81	82	
Operation range	Evaporator	Cooling	Min.-Max.	°CDB	4~20											
	Condenser	Cooling	Min.-Max.	°CDB	20~55	20~42	20~55	20~42	20~55	20~42	20~42	20~55	20~42			
Refrigerant	Type/GWP			R-1234(ze)/7												
	Charge			kg	120			180		230		320	340	390		
	Circuits			Quantity	1											
Refrigerant charge				TCO2eq	1			2		-						
Piping connections				mm	139.7			168.3		219.1						
				mm	139.7			168.3		219.1	168.3	219.1				
Unit	Running current	Cooling	Nom.	A	72	99	112	133	144	125	198	222	249	297.8	339.2	374.1
Unit	Running current	Max		A	95	150	123	190		142	300	246	284	451	370	448
Power supply	Phase/Frequency/Voltage			Hz/V	3~/50/400											

performances according to CSS software 10.27



Water cooled centrifugal chiller, high efficiency, standard sound

- › No friction loss, no oil contamination, no additional oil management systems and an increased equipment life thanks to the magnetic bearing technology
- › Excellent part load efficiency
- › Totally oil-free operation resulting in reduced maintenance costs and increased reliability
- › Compact footprint through stacked heat exchanger lay-out
- › HFO R1234zeE Refrigerant with Ozone Depletion Potential equal to zero and extremely low Global Warming Potential
- › Increased installation flexibility thanks to limited dimensions
- › Easy handling: thanks to its compact size, it can easily pass through the doorway
- › MicroTech 4 controller with superior control logic and easy interface
- › A wide portfolio of options is available to meet different requirements.
- › The compressor vibration levels are extremely low as a result of the high-speed design



EWWH-DZ

Microtech 4



More details and final information can be found by scanning or clicking the QR codes.



EWWH-DZXE

Cooling Only				EWWH-DZXE																	
				245	345	405	470	480	490	685	740	810	955	C10	C12	C14					
Space cooling	A Condition Pdc (35°C - 27/19)			kW																	
	η _{s,c}			%																	
SEER				8.85	8.75	8.79	8.94	8.4	8.9	9.18	8.8	9.22	9.15	9.17	9.35						
Cooling capacity	Nom.			kW																	
	Power input	Cooling	Nom.	47.9	63.4	75.1	98.7	79.5	95.1	126.3	144.6	149.4	159.2	192.9	229.5	238.3					
Capacity control	Method			Variable																	
	Minimum capacity			%																	
EER				5.05	5.35		4.93	5.97	5.09	5.37	5.13	5.37	5.93	5.35	5.34	5.94					
ESEER				7.78	8.02	8	7.75	7.83	8.04	8.22	-	8.27	8.23	-	-						
IPLV				9.33	9.54	9.58	9.36	9.56	9.43	9.74	9.44	9.79	9.8	9.62	9.65	9.72					
Dimensions	Unit	Height		1,865			1,985			2,082			2,200			2,083		2,225		2,290	
		Width		1,055			1,160			1,510			1,270			1,510					
		Length		3,625			3,585			4,688			3,580			4,793		4,768		4,812	
Weight	Unit			kg																	
	Operation weight			2,033	2,276	2,407	3,197	3,162	3,354	3,568	4,970	4,412	4,699	5,370	5,890	6,920					
Water heat exchanger - evaporator	Type			Flooded shell and tube																	
	Water volume			70	96	107		134		156	207.3	199	229	317.4		444.3					
	Water flow rate	Cooling	Nom.	11.6	16.2	19.2	22.4	22.6	23.1	32.4	34.9	38.4	45.2	48.7	57.9	67					
		Cooling	Nom.	kPa	29.7	28.4		37.8	30.8	32	41.3	31	38.1	36.9	37	38	33				
Water heat exchanger - condenser	Type			Shell and tube						Flooded Shell & Tube	Shell and tube			Flooded Shell & Tube							
	Water volume			83	100	120		188	170	211	326.4	263	320	359.9	442.6	603.6					
	Water flow rate	Cooling	Nom.	13.9	19.2	22.8	26.7	26.4	27.7	38.5	41.8	45.5	52.8	57.8	68.8	78.4					
		Cooling	Nom.	kPa	28	34	31	42	18	26	29	21	28	23	33	30	26				
Compressor	Type			Driven vapour compressor																	
	Quantity			1			2	1	2	3	2		3								
Sound power level	Cooling	Nom.		87.9	88.9	89.9	91.1		91	92	98	93.3	94.3	99	100	101					
	Sound pressure level	Cooling	Nom.	69.6	70.6	71.6	72.6		73.6	79	74.6	75.6	80	81	82						
Operation range	Evaporator Cooling	Min.~Max.		°CDB																	
	Condenser Cooling	Min.~Max.		°CDB																	
Refrigerant	Type/GWP			R-1234(ze)/7																	
	Charge			kg																	
	Circuits			Quantity																	
Refrigerant charge				1						-	2			-							
Piping connections				139.7						168.3			219.1								
				139.7						168.3			219.1								
Unit	Running current	Cooling	Nom.	A	75	103	117	142	125	150	205	277	232	249	311	249					
Unit	Running current	Max		A	95	150	123	190	142	190	300	286	246	284	451	370	448				
Power supply	Phase/Frequency/Voltage			Hz/V																	
				3~/50/400																	

performances according to CSS software 10.27



Water cooled centrifugal chiller, high efficiency, standard sound

- › No friction loss, no oil contamination, no additional oil management systems and an increased equipment life thanks to the magnetic bearing technology
- › Excellent part load efficiency
- › Totally oil-free operation resulting in reduced maintenance costs and increased reliability
- › Compact footprint through stacked heat exchanger lay-out
- › Increased installation flexibility thanks to limited dimensions
- › Easy handling: thanks to its compact size, it can easily pass through the doorway
- › MicroTech 4 controller: sophisticated adaptive software logic for stable operating conditions
- › A wide portfolio of options is available to meet different requirements.
- › The compressor vibration levels are extremely low as a result of the high-speed design
- › Optimized for highly efficient R-513A refrigerant and compatible with next generation refrigerants



More details and final information can be found by scanning or clicking the QR codes.



EWWS-DZXS

Cooling Only				EWWS-DZXS	320	440	530	610	640	700	880	C10	C13	C14	C15	C21		
Space cooling	A Condition Pdc (35°C - 27/19)		kW	315.85	438.98	520.21	629.71	630.64	694.46	875.77	1,043.15	1,304.67	1,390.46	1,549.85	2,027.16			
	ηs,c		%	3.416	3.376	3.54	3.448	3.508	3.428	3.508	3.636	3.448	3.624	3.552	3.608			
SEER				8.74	8.64	9.05	8.82	8.97	8.77	8.97	9.29	8.82	9.26	9.08	9.22			
Cooling capacity	Nom.		kW	316	439	520	609	631	694	876	1,043	1,305	1,390	1,550	2,027			
Power input	Cooling	Nom.	kW	67.1	90	103	126	132	127	177	205	270	257	312	384			
Capacity control	Method			Variable														
	Minimum capacity		%	30	21		16	15	18	11		7	9	8	6			
EER				4.71	4.88	5.05	4.82	4.77	5.44	4.92	5.08	4.82	5.4	4.96	5.27			
IPLV				9.31	9.25	9.61	9.29	9.44	9.77	9.45	9.83	9.1	9.96	9.38	9.34			
Dimensions	Unit	Height	mm	1,865				1,985				2,200	2,083	2,200	2,225	2,290		
		Width	mm	1,055				1,160				1,270	1,510	1,270	1,510			
		Depth	mm	3,625				3,585				3,580	4,793	3,580	4,768	4,812		
Weight	Unit		kg	1,700	1,900	2,000	2,850		2,600	2,900	3,600	4,350	3,800	4,750	5,500			
		Operation weight	kg	1,973	2,216	2,347	3,197	3,344	3,102	3,458	4,292	5,020	4,579	5,540	6,570			
Water heat exchanger - evaporator	Type			Flooded shell and tube														
	Water volume		l	70	96	107		134		156	199	272	229	317	444			
	Water flow rate	Cooling	Nom.	l/s	15.3	21.3	25.2	29.1	30.6	33.7	42.5	50.5	63.1	67.4	75	98.1		
Water heat exchanger - condenser	Type	Cooling	Nom.	kPa	Water pressure drop	47.3	40.9	44.8	59.1	51.1	61.7	64.5	59.3	59.5	74.4	61.3	70.4	
					Flooded Shell & Tube													
					Water volume	l	83	100	120		170	188	211	263	360	320	443	604
Compressor	Type	Cooling	Nom.	dBA	Water flow rate	l/s	18.4	25.4	30.1	34.9	36.8	39.6	50.8	60.2	75.9	79.5	89.9	116
					Water pressure drop	kPa	49.4	60.4	54.5	74.2	46.5	42.1	51.5	50.4	56.1	53.4	43.7	55.7
Sound power level	Type/GWP	Cooling	Nom.	dBA	Driven vapour compressor													
					Quantity	1			2		1	2		3	2	3		
Sound pressure level	Charge	Cooling	Nom.	dBA	87.9	88.9	89.9	91.1	91.0	91.1	92.0	93.3	93.5	94.3	94.8	95.8		
					69.6	70.6	71.6	72.6		73.6		74.6	73.9	75.6	75.2	76.2		
Refrigerant	Circuits	Quantity	R-513A/631															
			kg	120	150	120	140	190	180	200	230	240	230	270				
Piping connections	Type	Cooling	Nom.	mm	139.7				168.3				219.1					
					mm	139.7				168.3				219.1				



Water cooled centrifugal chiller, high efficiency, standard sound

- › No friction loss, no oil contamination, no additional oil management systems and an increased equipment life thanks to the magnetic bearing technology
- › Excellent part load efficiency
- › Totally oil-free operation resulting in reduced maintenance costs and increased reliability
- › Compact footprint through stacked heat exchanger lay-out
- › Increased installation flexibility thanks to limited dimensions
- › Easy handling: thanks to its compact size, it can easily pass through the doorway
- › MicroTech 4 controller: sophisticated adaptive software logic for stable operating conditions
- › A wide portfolio of options is available to meet different requirements.
- › The compressor vibration levels are extremely low as a result of the high-speed design
- › Optimized for highly efficient R-513A refrigerant and compatible with next generation refrigerants



More details and final information can be found by scanning or clicking the QR codes.




EWWS-DZXE

Cooling Only				EWWS-DZXE																					
				340	470	570	670	680	740	950	C10	C11	C14	C15	C17	C22									
Space cooling	A Condition Pdc (35°C - 27/19)			kW	336.72	471.24	558.03	676.76	674.49	728.69	941.72	1,024.55	1,117.07	1,419.67	1,450.66	1,652.82	2,128.56								
	ηs,c			%	3.428	3.396	3.568	3.452	3.52	3.464	3.532	3.444	3.664	3.464	3.668	3.556	3.656								
SEER					8.77	8.69	9.12	8.83	9	8.86	9.03	8.81	9.36	8.86	9.37	9.09	9.34								
Cooling capacity	Nom.			kW	337	471	558	671	674	729	942	1,025	1,117	1,420	1,451	1,653	2,129								
Power input	Cooling	Nom.		kW	70.2	95.1	108	139		129	188	209	215	287	259	324	385								
Capacity control	Method				Variable																				
	Minimum capacity			%	29	20		15		17	10			7	9	7	6								
EER					4.8	4.96	5.15	4.8	4.85	5.61	5.01	4.89	5.18	4.94	5.6	5.1	5.52								
IPLV					9.22	9.2	9.59	9.11	9.31	9.78	9.38	9.25	9.81	9.12	9.98	9.4	9.41								
Dimensions	Unit	Height	mm	1,865			1,985			2,082			2,200		2,083		2,200		2,225		2,290				
		Width	mm	1,055			1,160			1,510			1,270		1,510		1,270		1,510						
		Depth	mm	3,625			3,585			4,688			3,580		4,793		3,580		4,768		4,812				
Weight	Unit			kg	1,750	1,950	2,050	2,850		2,650		3,000		4,400		3,700		4,700		3,900		5,100		5,900	
		Operation weight		kg	2,033	2,276	2,407	3,197	3,354	3,162	3,568	4,970	4,412	5,370	4,699	5,890	6,920								
Water heat exchanger - evaporator	Type		Flooded shell and tube																						
	Water volume		l	70	96	107		134			156	207	199	272	229	317	444								
	Water flow rate	Cooling	Nom.	l/s	16.3	22.9	27	32	32.7	35.3	45.6	49.6	54.1	68.8	70.3	80.1	102								
Water heat exchanger - condenser	Type		Flooded Shell & Tube																						
	Water volume		l	83	100	120		170	188	211	326	263	360	320	443	604									
	Water flow rate	Cooling	Nom.	l/s	19.6	27.3	32.1	38.4	39.2	41.4	54.4	59.5	64.2	82.3	82.5	95.5	121								
Compressor	Type		Driven vapour compressor																						
	Quantity			1			2		1	2	3	2	3	2	3										
	Sound power level	Cooling	Nom.	dB(A)	87.9	88.9	89.9	91.1	91.0	91.1	92.0	92.6	93.3	93.5	94.3	94.8	95.8								
Sound pressure level	Cooling	Nom.	dB(A)	69.6	70.6	71.6	72.6		73.6			73	74.6	73.9	75.6	75.2	76.2								
Refrigerant	Type/GWP		R-513A/631																						
	Charge		kg	160	130	200		190	200	270	250	270	250	300	355										
	Circuits	Quantity		1																					
Piping connections			mm	139.7			168.3			219.1															
			mm	139.7			168.3			219.1															

Water cooled centrifugal chiller, high efficiency, standard sound

- › Single Compressor chiller
- › High part load efficiency with Daikin VFD Unit Mounted - Refrigerant Cooled
- › Low Harmonics VFD option
- › Excellent Full Load performance
- › Unloading down to 10% without Hot Gas By Pass
- › Refrigerant flexibility with R-134a, R-1234ze and R-513A
- › Reduced refrigerant quantity
- › Touch screen operator panel
- › Unit mounted control panel
- › Rapid restart for fast start-up after power loss
- › Heat pump mode

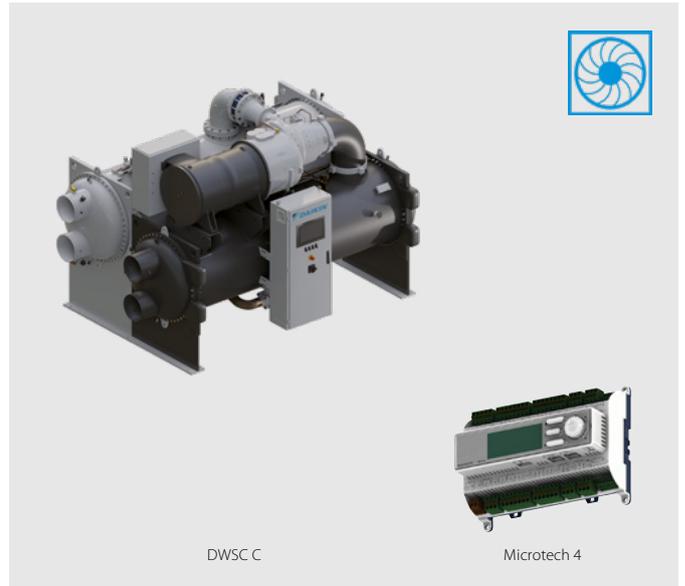

Daikin Centrifugal Compressor

- › No compromises in application flexibility
- › Proven compressor technology (Daikin centrifugal compressor design)



Rapid restart for fast start-up after power loss

The UPS keeps the controller switched on enabling the unit to quickly reach the full load. Focused on data center and all applications where the cooling capacity supply is crucial.



Reduced refrigerant quantity

Thanks to the new high efficiency tubes and more compact heat exchanger design.



Heat pump mode

With reversibility on water side whenever a heating load is demanded thus improving suitability for applications with changing load during the year.

More details and final information can be found by scanning or clicking the QR codes.



DWSC-C

Cooling Only		DWSC C	DWSC C	DWSC C
Cooling capacity	Min./Max.	kW	1,050 (1)/4,500 (1)	700 (1)/3,300 (1)
Compressor	Type		Single stage centrifugal compressor	Single stage centrifugal compressor
Refrigerant	Type		R-134a / R-513A	R-1234(ze)
Power supply	Frequency	Hz	50/60	50/60

(1) AHRI conditions

Water cooled centrifugal chiller, high efficiency, standard sound

- › Lower equipment, installation and annual operating costs than two single compressor chillers
- › Main components can be removed or repaired without shutting down the unit as the chiller has two of everything (compressors, lubrication systems, control systems and starters)
- › Compact design for small footprint and minimized installation space
- › Unloading to 5% of full load provides improved stability of the chilled water temperature and less harmful cycling of compressors
- › High efficiency flooded type shell and tube evaporator/condensers



Free cooling operation

Allows to reduce the power consumption generated by traditional mechanical cooling.



Touch screen operator panel



Touch screen operator panel is graphically intuitive and easy to use for enhanced operator productivity. Important status and control information is available at a glance or a touch.

Unit mounted control panel



More details and final information can be found by scanning or clicking the QR codes.



DWDC-C

Cooling Only		DWDC C	DWDC C
Cooling capacity	Min./Max.	kW	2,100 (1)/9,000 (1)
Compressor	Type		Single stage centrifugal compressor
Refrigerant	Type		R-134a / R-513A / R-1234(ze)
Power supply	Frequency	Hz	50/60

(1)AHRI conditions

Accessories - Chillers

			Air-cooled chillers							
Panels			EWAA~BVP EWYA~BVP	EWAA~DA EWYA~DA	EWYD~BZ	EWYD~4Z	EWYT~B-	EWAAH~TZB & C	EWAD~TZB & C	EWAD~T-C
EKDICMPAB	(a) (b) (c)	iCM Primary Basic								•
EKDICMPAL	(a) (b) (c)	iCM Primary for evaporator peripherals Light						•	•	•
EKDICMPAF	(a) (b) (c)	iCM Primary for evaporator peripherals Full						•	•	•
EKDICMPWL	(a) (b) (c)	iCM primary Evaporator/Condenser Light								
EKDICMPWF	(a) (b) (c)	iCM primary Evaporator/Condenser Full								
EKDICMCTL	(a) (b)	iCM Cooling towers Light								
EKDICMCTF	(a) (b)	iCM Cooling towers Full								
EKDICMPABIO	(a) (b)	iCM Primary Basic with IO third party chiller						•	•	•
EKDICMPALIO	(a) (b)	iCM Primary Evaporator Light with IO third party chiller						•	•	•
EKTSMS		Temperature sensor for master/slave configuration					•			
EKRUMCL1		User Interface	•							
			Air-cooled chillers							
Serial Cards & Communication Modules			EWAA~BVP EWYA~BVP	EWAA~DA EWYA~DA	EWYD~BZ	EWYD~4Z	EWYT~B-	EWAAH~TZB & C	EWAD~TZB & C	EWAD~T-C
EKAC200J		Serial Card RS485/Modbus			•					
EKACBAC		Ethernet Card BACnet			•					
EKACLONP		Serial Card LON FTT 10			•					
EKACRS232		Serial Card RS232 Modem Interface (single unit only)			•					
EKACWEB		Web Server Card			•					
EKACBACMSTP		Serial Card BACnet MSTP			•					
EKACBACCERT		Serial Card BACnet pre-loaded IP/Ethernet (centrifugal chillers)								
EKACMSTPCERT		Serial Card BACnet pre-loaded MSTP (centrifugal chillers)								
EKCM200J		ModBus RTU communication module				•				
EKCM10N		LON communication module				•	•	•	•	•
EKCMBACMSTP		BACnet/MSTP communication module				•				
EKCMBACIP		BACnet/IP communication module				•	•	•	•	•
EKDOSMWO		Daikin on Site Modem without M2M card			•	•	•	•	•	•
			Air-cooled chillers							
Other Systems & Accessories			EWAA~BVP EWYA~BVP	EWAA~DA EWYA~DA	EWYD~BZ	EWYD~4Z	EWYT~B-	EWAAH~TZB & C	EWAD~TZB & C	EWAD~T-C
EKCON		Converter RS485 to RS232			•					
EKCONUSB		Converter RS485 to USB			•					
EKMODEM		Fixed modem			•					
EKGSMOD		GSM modem			•					
EKRUPCJ		Remote display kit			•					
EKRUPCS		Local/remote display HMI				•	•	•	•	•
EKPWPPOEXT		PlantWatchPro I/O extension module for hardwiring and retrofit			•					
EKGWWEB		Gateway web (Ethernet LAN SNMP)			•					
EKGWMODEM		Gateway for modem			•					
EKAC10C		Address card for connection to BMS or Remote user interface								
EKRUMCA		Remote installed user interface								
EKLS2	(d)	Low noise kit 22/28/35/45/55/65 Hp-units								
ECB2MUCW	(e)	Controller kit								
ECB3MUCW	(e)	Controller kit								
EKRPIAHT	(g)	Digital input/output PCB								
EKRUAHTB	(g)	Remote user interface								
DTA104A62	(f)	External control adapter								
BHGP26A1	(f)	Digital pressure gauge kit								
EKQDP2M016	(g)	Differential Pressure Sensor 4-20 mA 0-160 kPa					•	•	•	•
EKQDP2M020	(g)	Differential Pressure Sensor 4-20 mA 0-250 kPa					•	•	•	•
EKQDP2M040	(g)	Differential Pressure Sensor 4-20 mA 0-400 kPa					•	•	•	•
EKQDP2M060	(g)	Differential Pressure Sensor 4-20 mA 0-600 kPa					•	•	•	•
EKDAPCONT		Containerization of one unit			•	•	•	•	•	•
EKDAPSTF		Containerization of additional units in the same container			•	•	•	•	•	•

Notes:

- (a) Price **does not** include commissioning of panel; if commissioning is required please refer to RN17-041
- (b) iCM panels work in **cooling mode only**; heat pump versions, total heat recovery and Free cooling options on A/C and W/C chillers **are not compatible**
- (c) In case you are ordering iCM panels please add corresponding modbus RTU communication module (EKCM200J or EKAC200J) for each chiller unit controller
- (d) For 45/55/65 Hp-units 2 pieces are needed
- (e) Only available for modular units (EWWP~KAW1M)
- (f) Price available in SAP system
- (g) Differential pressure sensor are specific for iCM panels in variable primary flow management

			Water-cooled chillers							Centrifugals		
ERAD~E-	EWAT~B-	EWAD~CF	EWQ~KC	EWLQ~KC	EW_Q-G EW_Q-L	EWLD~I-	EWWS/H/D~J- EWLS/H/D~J-	EWVH~VZ	EWVD~VZ	EWVH~DZ	EWVD~DZ	DWSC & DWDC
	•				•	•	•	•	•	•	•	•
	•	•			•	•	•	•	•	•	•	•
	•	•			•	•	•	•	•	•	•	•
					•			•	•	•	•	•
					•			•	•	•	•	•
					•			•	•	•	•	•
					•			•	•	•	•	•
	•				•			•	•	•	•	•
	•											
	•				•							

			Water-cooled chillers							Centrifugals		
ERAD~E-	EWAT_B- (single)	EWAD~CF	EWQ~KC	EWLQ~KC	EW_Q-G EW_Q-L	EWLD~I-	EWVD~J- EWLD~J-	EWVH~VZ A	EWVD~VZ A	EWVH~DZ	EWVD~DZ	DWSC & DWDC
												•
												•
												•
												•
												•
•	•	•			•	•	•	•	•	•	•	
•	•	•			•	•	•	•	•	•	•	
•	•	•			•	•	•	•	•	•	•	
•	•	•			•	•	•	•	•	•	•	
•	•	•			•	•	•	•	•	•	•	

			Water-cooled chillers							Centrifugals		
ERAD~E-	EWAT_B- (single)	EWAD~CF	EWQ~KC	EWLQ~KC	EW_Q-G EW_Q-L	EWLD~I-	EWVD~J- EWLD~J-	EWVH~VZ A	EWVD~VZ A	EWVH~DZ	EWVD~DZ	DWSC & DWDC
												•
												•
												•
												•
•	•	•			•	•	•	•	•	•	•	
												•
												•
			•	•								
			•	•								
			•	•								
			•	•								
			•	•								
			•	•								
			•	•								
	•	•			•	•	•	•	•	•	•	•
	•	•			•	•	•	•	•	•	•	•
	•	•			•	•	•	•	•	•	•	•
	•	•			•	•	•	•	•	•	•	•
•	•	•			•	•	•	•	•	•	•	•
•	•	•			•	•	•	•	•	•	•	•